

(0.50 mm) .0197"

FJH-20-D-04.00-4

FJH-10-D-06.00-4

FJH SERIES

FLAT FLEXIBLE CABLE (FFC) JUMPER

SPECIFICATIONS

For complete specifications see www.samtec.com/FJH

Conductor:

Tin Plated Copper

Conductor

Resistance:

1000 Ω /km max

Insulation Resistance:

10 M Ω /km min

(conductor-to-conductor)

Dielectric Test:

400 VAC during 1 minute

(conductor-to-conductor)

Temperature Rating:

-30 °C to +80 °C

Voltage Rating:

60 VAC

Flame Resistance:

VW-1 (UL 758)

RoHS Compliant:

Yes

Mates with:


ZF5S

Double or
reversed ended

(0.50 mm)
.0197"
pitch

(4.00 mm)
.157"

FJH	NO. OF POSITIONS	STYLE	OVERALL LENGTH	STRIP LENGTH
	-10, -15, -20, -25, -30, -40, -43, -50	-D = Double End -R = Reversed End	-“XX.XX” = Specify OVERALL LENGTH in inches ($\pm 1/8$ inch) (-D & -R = (50.80 mm) 2.00" minimum)	-4 = (4.00 mm) .157"

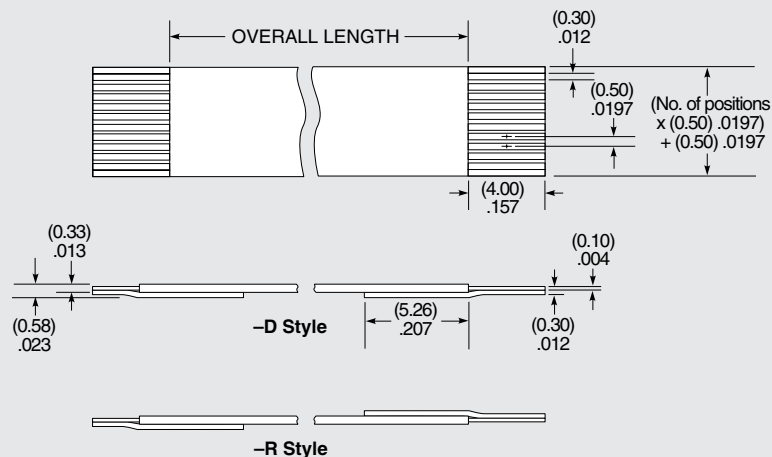

Note: Stiffener color will be blue or black at Samtec's discretion.

Note: Some sizes, styles and options are non-standard, non-returnable.