

Connecting cable - PLC-V8C/CAB/TBUS/0,3M - 2905263

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Round cable set; controller: PLC logic (connection to the DIN rail connector); connection 1: COMBICON connectors (1x 3-position); connection 2: COMBICON connectors (1x 5-position); cable length: 0.3 m

Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4046356958882

Technical data

General

Length of cable	0.3 m
-----------------	-------

Connector 1

Connection name	Field level
Connection method	COMBICON connectors
Stripping length	7 mm
Screw thread	M2
Conductor cross section solid	0.14 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section AWG	28 ... 16
Number of connections	1
Number of positions	5

Connector 2

Connection name	Controller level
Connection method	COMBICON connectors
Stripping length	6 mm
Conductor cross section solid	0.2 mm ² ... 0.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 0.5 mm ²

Connecting cable - PLC-V8C/CAB/TBUS/0,3M - 2905263

Technical data

Connector 2


Conductor cross section AWG	24 ... 20
Number of connections	1
Number of positions	3

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Schematic diagram

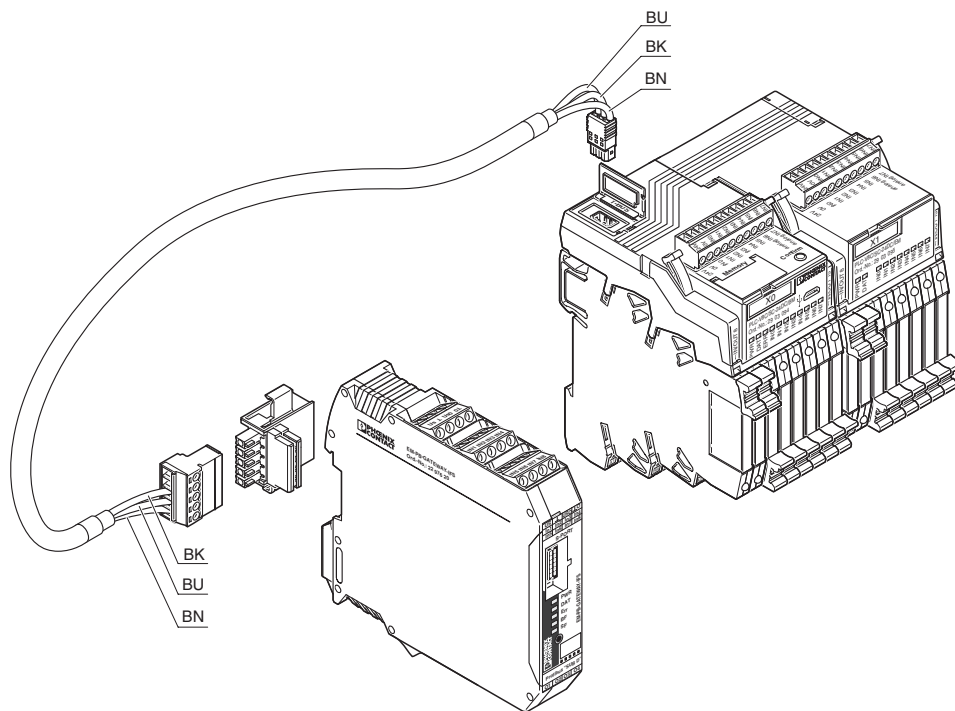

Approvals

Approvals

Approvals

EAC

Connecting cable - PLC-V8C/CAB/TBUS/0,3M - 2905263

Approvals

Ex Approvals

Approval details

EAC



RU C-
DE.A*30.B00767

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>