Downloaded from Alldatasheet.com

迪一電子®

UF5400G THRU UF5408G

3.0 AMP. Glass Ultra Fast Rectifiers


Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: Molded plastic DO-201AD
- Terminals: Plated leads solderable per MIL-STD-202,Method 208 guaranteed
- Polarity: Color band dentes cathode end
- Mounting Position: Any
- Making: Type Number
- Lead Free: For RoHS/Lead Free Version

DO-201AD

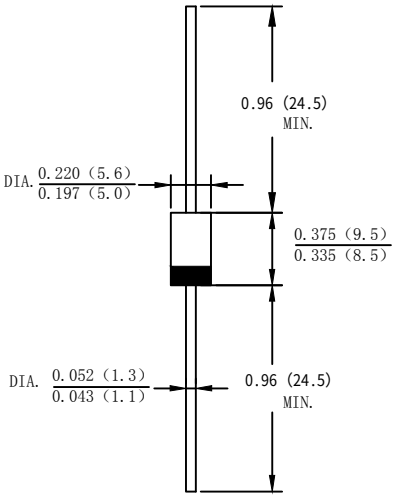

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25℃ ambient temperature unless otherwise specified

Single phase,half wave,60Hz,resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	UF5400G	UF5401G	UF5402G	UF5404G	UF5406G	UF5407G	UF5408G	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	210	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	600	800	1000	V
Maximum Average Forward Rectified Current.375"(9.5mm) lead length@T_A=50℃	I_O	3.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	125							A
Forward Voltage @IF=3.0A	V_{FM}	1.0			1.3	1.7			V
Peak Reverse Current @T_A=25℃	I_R	5.0							uA
At Rated DC Blocking Voltage @T_A=100℃		75				200			
Typical Junction Capacitance (Note 1)	C_J	45				36			pF
Typical Thermal Resistance Junction to Ambient(Note 2)	$R_{\theta JA}$	25							℃/W
Maximum Reverse Recovery Time(Note 3)	Trr	50				75			ns
Operating Temperature Range	T_J	-55 to +150							℃
/Storage Temperature Range	T_{STG}	-55 to +150							℃

Note: 1. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

2. Leads maintained at ambient temperature at a distance of 9.5mm from the case

3.Reverse Recovery Test Conditions: IF=0.5A, IR=1A, Irr=0.25A

Downloaded from Alldatasheet.com

UF5400G THRU UF5408G

FIG. 1 – FORWARD CURRENT DERATING CURVE

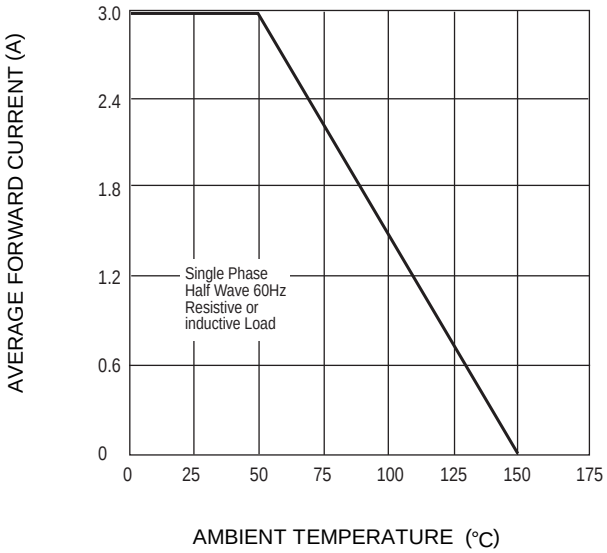


FIG.2-TYPICAL FORWARD CHARACTERISTICS

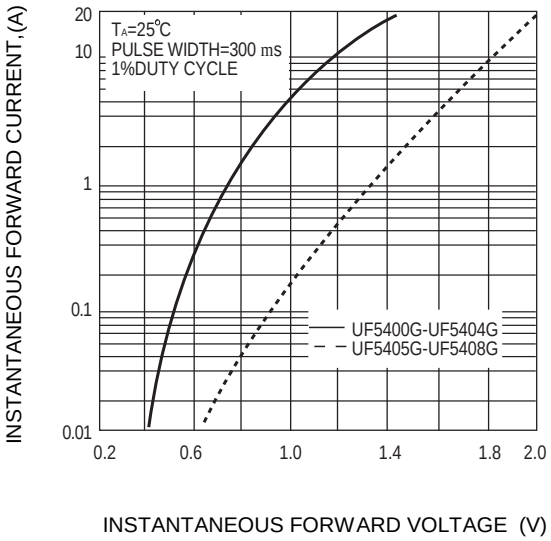


FIG. 3 – MAXIMUM NON-REPETITIVE SURGE CURRENT

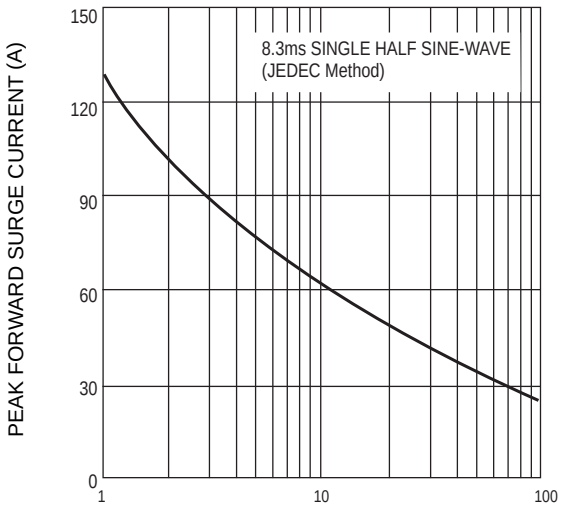


FIG.4 – TYPICAL JUNCTION CAPACITANCE

