

No. 3398A

2SA1772/2SC4615

2SA1772:PNP Epitaxial Planar Silicon Transistor
2SC4615:NPN Triple Diffused Planar Silicon Transistor

High Voltage Driver Applications

Features

- Large current capacity ($I_C = 1A$)
- High breakdown voltage ($V_{CEO} \geq 400V$)

() : 2SA1772

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Absolute Maximum Ratings at Ta = 25°C			unit
Collector to Base Voltage	V _{CB0}	(-)400	V
Collector to Emitter Voltage	V _{CEO}	(-)400	V
Emitter to Base Voltage	V _{EB0}	(-)5	V
Collector Current	I _C	(-)1	A
Collector Current(Pulse)	I _{CP}	(-)2	A
Collector Dissipation	P _C	1	W
		15	W
	T _c = 25°C		
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C


Electrical Characteristics at $T_a = 25^\circ\text{C}$

Electrical Characteristics at Ta = 25°C			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = (-)300V, I_E = 0$			(-) 1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = (-)4V, I_C = 0$			(-) 1.0	μA
DC Current Gain	h_{FE}	$V_{CE} = (-)10V, I_C = (-)100mA$	40*		200*	
Gain-Bandwidth Product	f_T	$V_{CE} = (-)10V, I_C = (-)50mA$		(50)70		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)200mA, I_B = (-)20mA$			(-) 1.0	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)200mA, I_B = (-)20mA$			(-) 1.0	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	(-) 400			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-) 400			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu A, I_C = 0$	(-) 5			V
Output Capacitance	C_{ob}	$V_{CB} = (-)30V, f = 1MHz$		(12)8		pF
Turn-ON Time	t_{on}	See specified Test Circuit.	(0.25)0.11			μs
Storage Time	t_{stg}	"	(3.0)4.0			μs
Fall Time	t_f	"	(0.3)0.65			μs

*: The 2SA1772/2SC4615 are classified by 100mA h_{FE} as follows:

40 C 80	60 D 120	100 E 200
---------	----------	-----------


Switching Time Test Circuit




$10I_{B1} = -10I_{B2} = I_C = 200\text{mA}$
 $R_L = 750\Omega, R_B = 50\Omega$, at $I_C = 200\text{mA}$
 (For PNP, the polarity is reversed.)

Unit (Resistance : Ω , Capacitance : F)

Package Dimensions 2045B
(unit : mm)

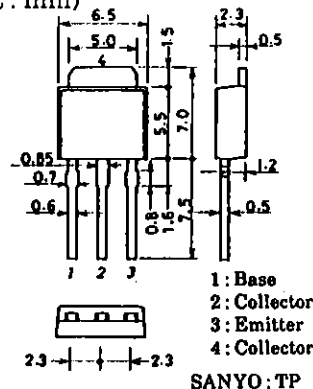

Package Dimensions 2044B
(unit : mm)











SANYO:TP-FA



SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

12894TH AX-8287/5300TA(KOTO) X-6468, 6469 No.3398-1/4



2SA1772/2SC4615

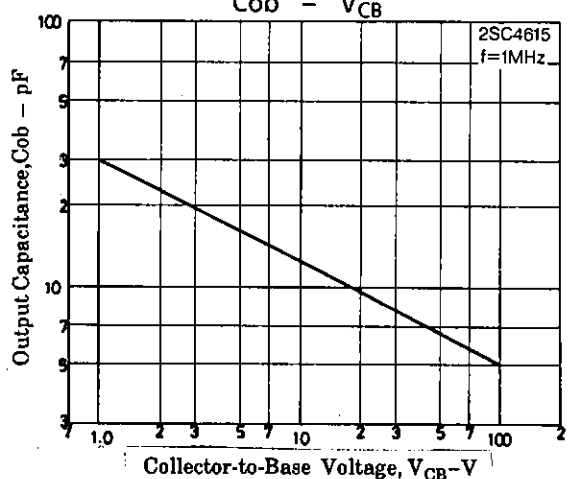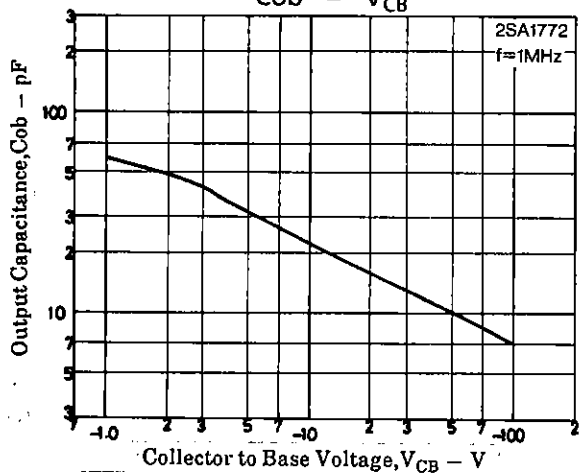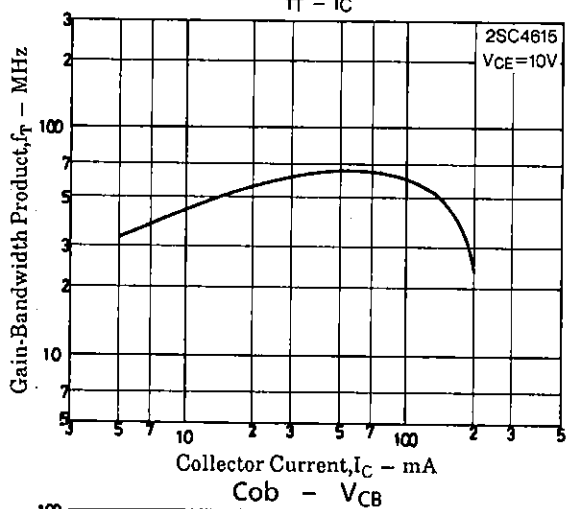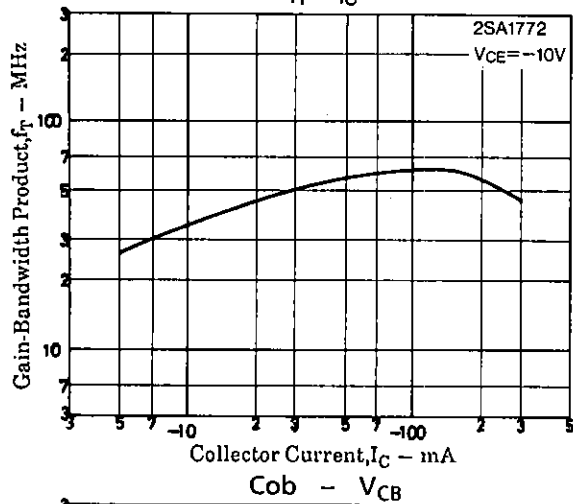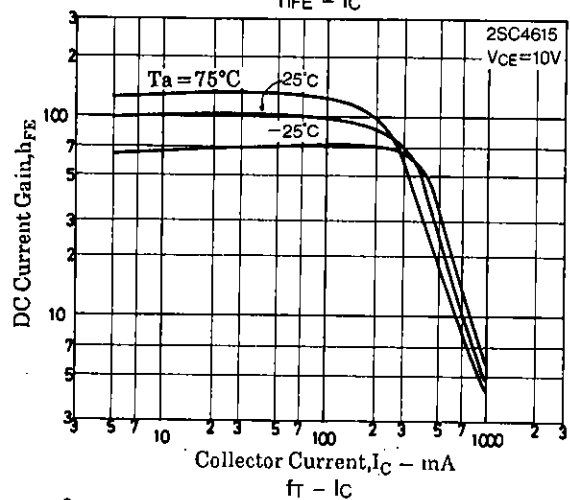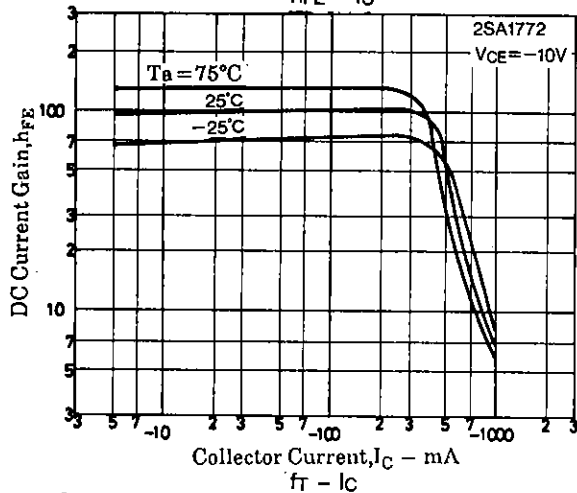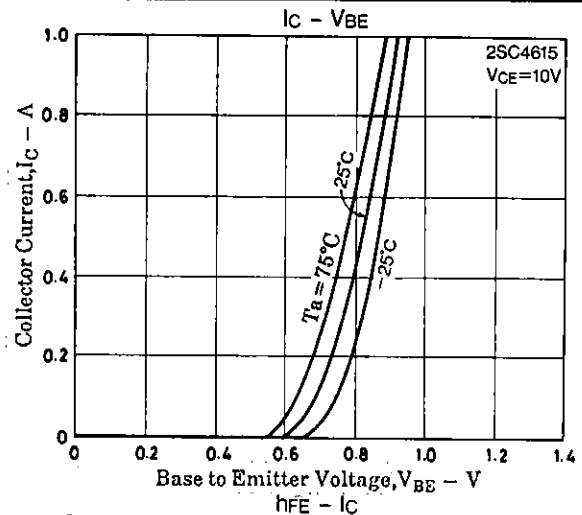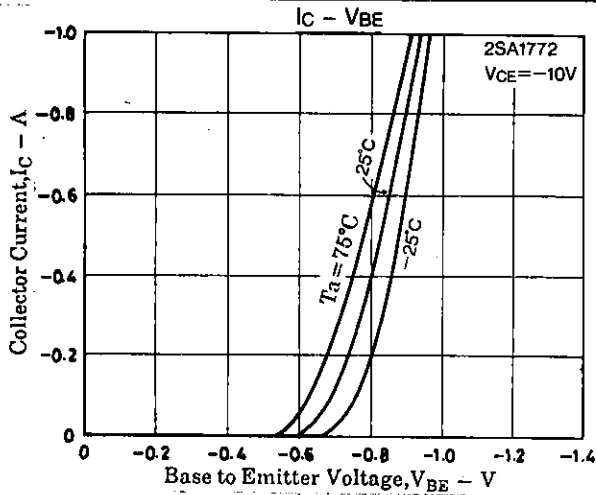

2SA1772/2SC4615

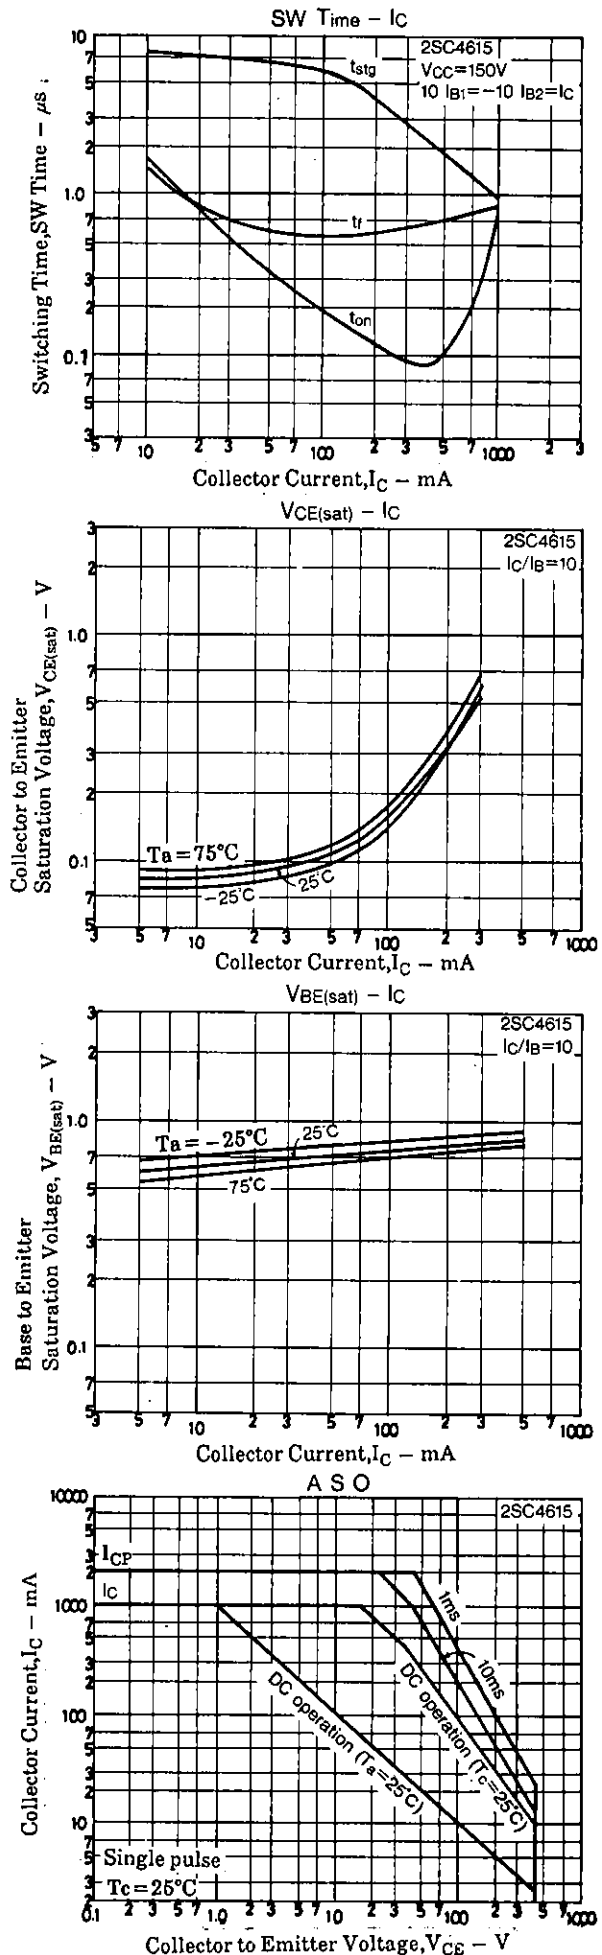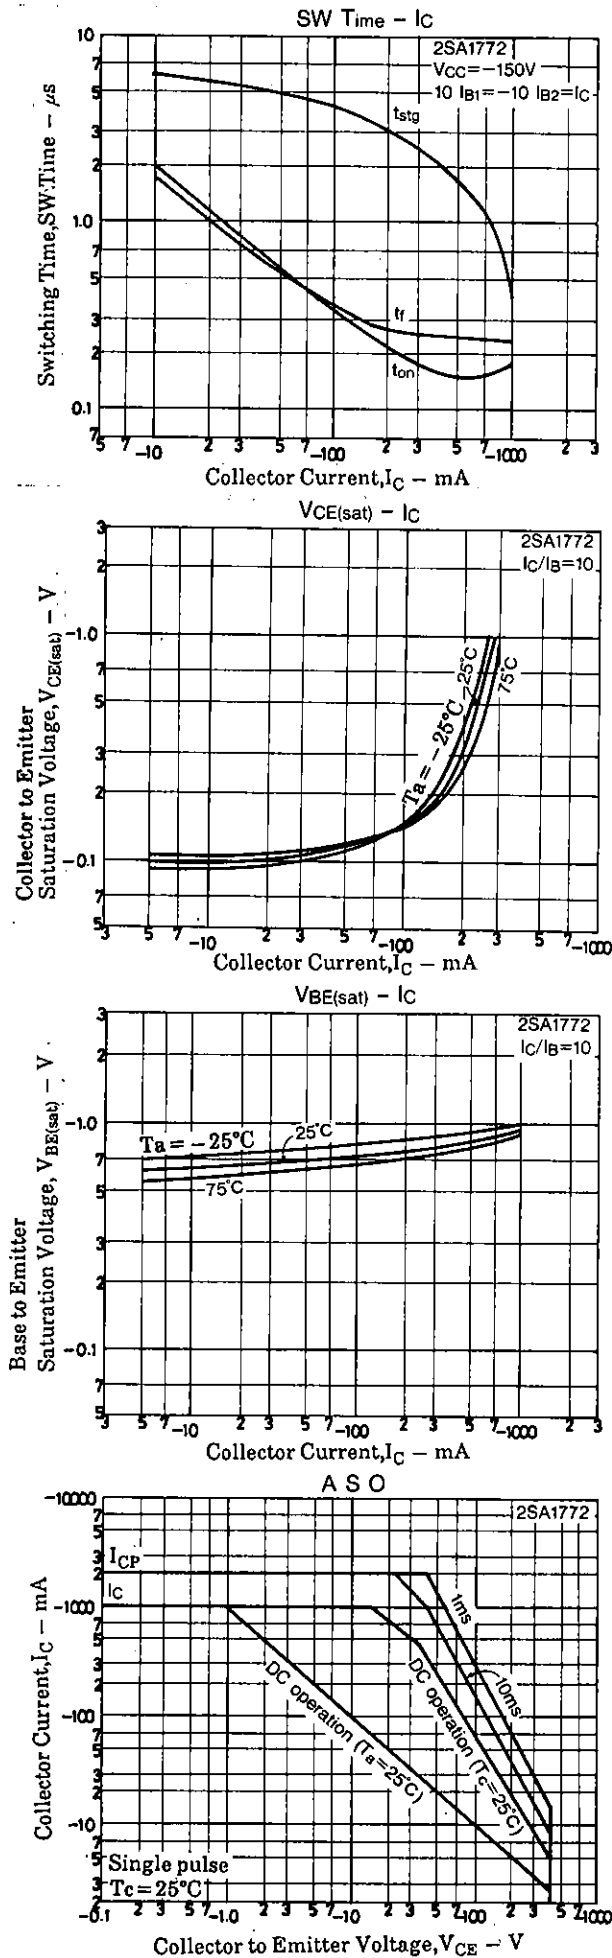

2SA1772/2SC4615

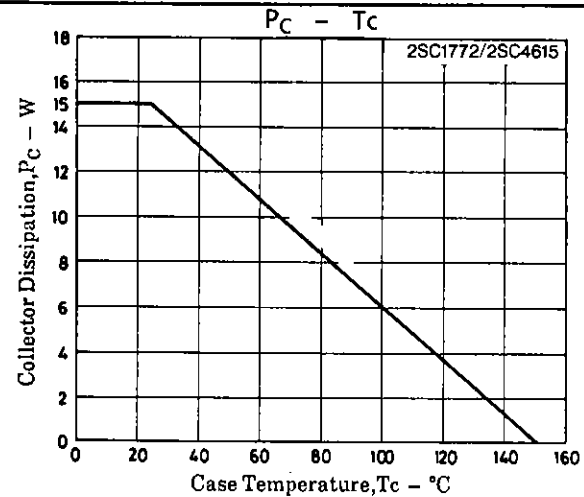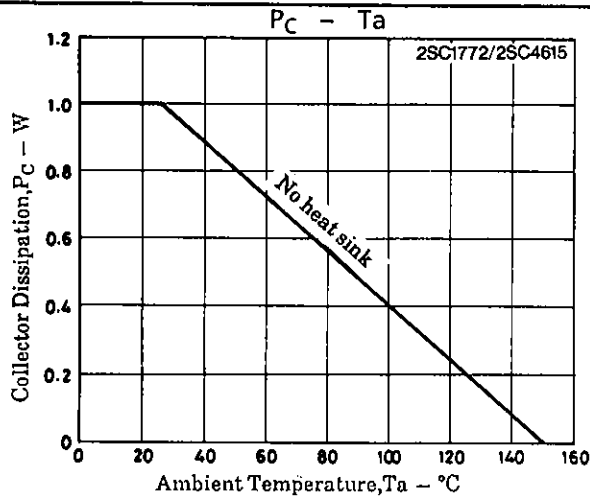

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.