Extract from the online catalog

CIOC 4-1-FV-A

Order No.: 1701388



http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1701388

Header, Nominal current: 3 A, Number of positions: 4, Pitch: 2 mm, Color: black, Metal surface: Au, Assembly: Soldering

Commercial data	
GTIN (EAN)	4 046356 030496
sales group	E194
Pack	100 pcs.
Customs tariff	85366990
Catalog page information	Page 177 (NTK-2010)

Product notes

WEEE/RoHS-compliant since: 02/25/2005

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	2 mm
Dimension a	6 mm
Number of positions	4
Pin spacing	2.00 mm

Technical data


Range of articles	CIOC-FV
Connection in acc. with standard	EN-VDE
Nominal current I_N	3 A
Nominal voltage U_N	32 V
Maximum load current	3 A
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals


Certification	CUL, UL

Diagrams/Drawings

Drilling plan/solder pad geometry

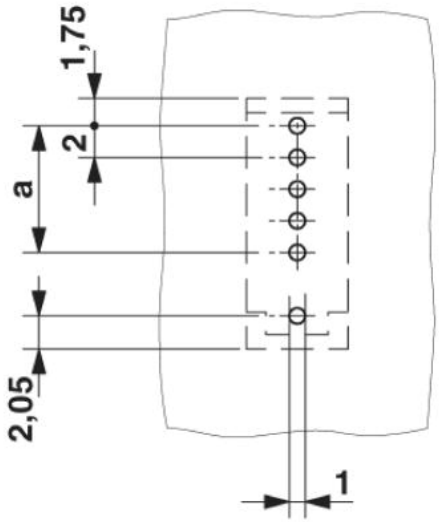

Dimensioned drawing

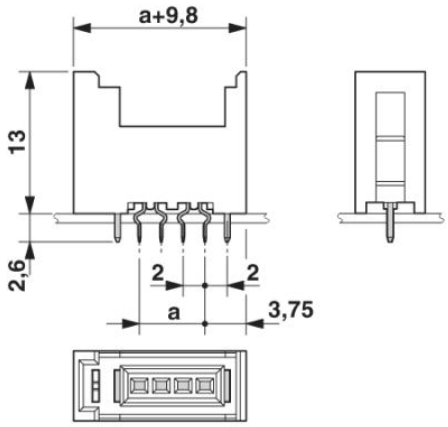

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
http://www.phoenixcontact.de

© 2010 Phoenix Contact
Technical modifications reserved;