
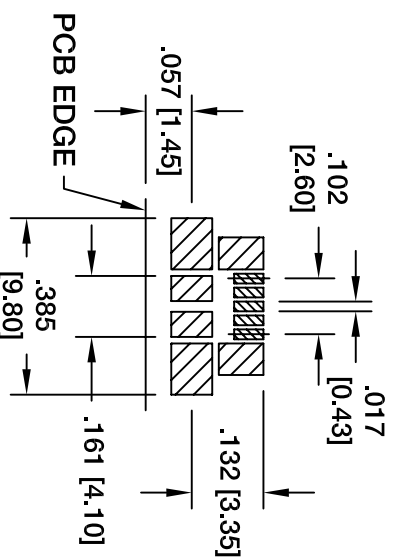
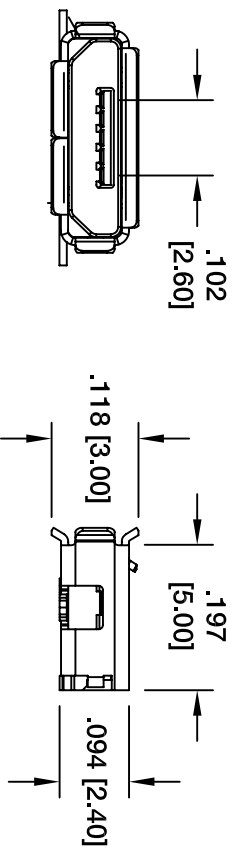


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/27/07	

APPROVED: _____ TITLE: _____
 DATE: _____

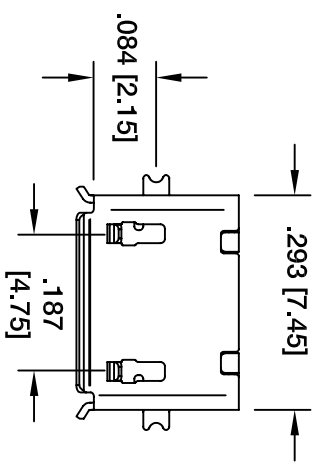

Recommended
PCB Layout

PACKAGED ON TAPE AND REEL

SPECIFICATIONS:

- Material: Insulator: Hi-Temp Nylon PA6T, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Shell: Steel, Tin plated
- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails
- Electrical: Operating voltage: 30 VAC max.
- Current rating: 1 Amp max.
- Contact resistance: 50 mohms max.
- Insulation resistance: 100 Mohms min. @ 500 VDC
- Dielectric withstanding voltage: 250 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES	
X .XX ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	
DRAWN	SS
CHECKED	
APPROVED	
	6/27/07

TITLE		ADAM TECH	
MICRO USB, TYPE AB, SINGLE PORT RIGHT ANGLE, SMT, TAPE AND REEL		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
SIZE	PART NO.	SCALE:	SHEET 1 OF 1
X	MCR-AB-S-RA-SMT-TR	NTS	
REV.			