
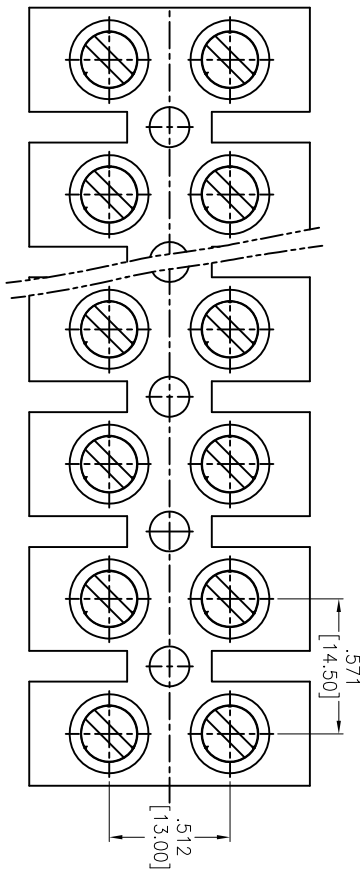


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/02/10	
A		UPDATED SPECS	1/28/13	
B		ADDED SPEC.	6/12/14	HR/AY
C		UPDATED DRAWING	11/27/14	HR/LL

APPROVED: _____
 DATE: _____ TITLE: _____

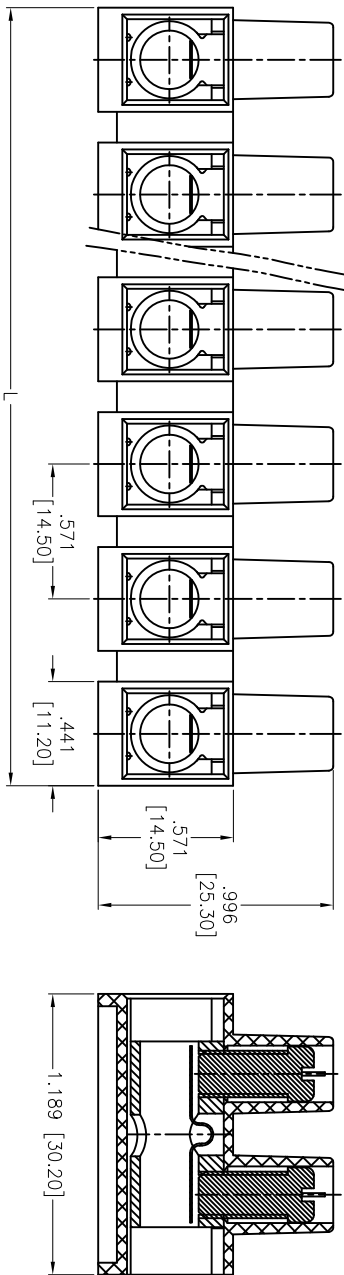

1 Pole = 2 Screws

Poles	ADAM P/N
2	TDJ-04
3	TDJ-06
4	TDJ-08
5	TDJ-10
6	TDJ-12
7	TDJ-14
8	TDJ-16
9	TDJ-18
10	TDJ-20
11	TDJ-22
12	TDJ-24

$L = .571 [14.50] \times \text{No. of (Pole-1)} + .441 [11.20]$

SPECIFICATIONS:

- Material: Nylon66, rated UL 94V-0
- Terminal: Brass, Nickel plated
- Wire protector: Stainless Steel
- Screws: Steel, Zinc plated
- Electrical:
 - Operating voltage: 300 V max
 - Current rating: 50 A max
 - Insulation Resistance: 500 Mohms min @ 500 VDC
 - Dielectric Withstanding Voltage: 2,000 VAC for 1 min.
- Mechanical:
 - Suitable Electric Wire: 8-16 AWG
 - Recommended Screw Torque: 17.5 Lbf/inch
 - Temperature Rating: Operating temperature: -33°C to +105°C
 - Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TERMINAL BLOCK, DUAL ROW, 14.50mm PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES	INCHES	HOLES
.X ± .10	ØXX ± .10	.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010		

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	TDJ-XX	-

REF: S0028C SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1