

SCREWLESS TYPE TERMINAL BLOCK

RA E133988(R)

ETB67 SERIES

SCREWLESS TYPE

PITCH=3.81mm

■ FEATURES


- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

■ SPECIFICATIONS


- | | |
|-------------------------|--|
| ● Pitch | 3.81mm |
| ● Wire range | 28~16 AWG (1.5mm ²) |
| ● No. of pole per block | 2P to 16P |
| ● Rating | 8 Amp, 300 VAC |
| ● Housing | PA66 |
| ● Contacts | Tin plated over Phosphor bronze |
| ● Springs | Stainless Steel |
| ● Push button | PA66 |
| ● Operating temperature | -30℃ ~+110℃
(includes temperature rise limit) |
| ● Stripping length | 9mm |
| ● Contact resistance | <15mΩ |
| ● UL Approval | 300V, 8A, 28~16 AWG |
| ● Plug in with ETB4A | |



PART NUMBERING SYSTEM

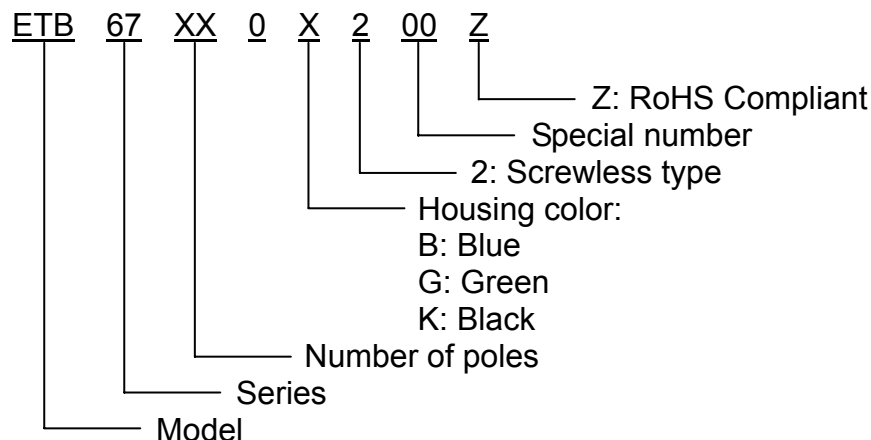

DRAWING

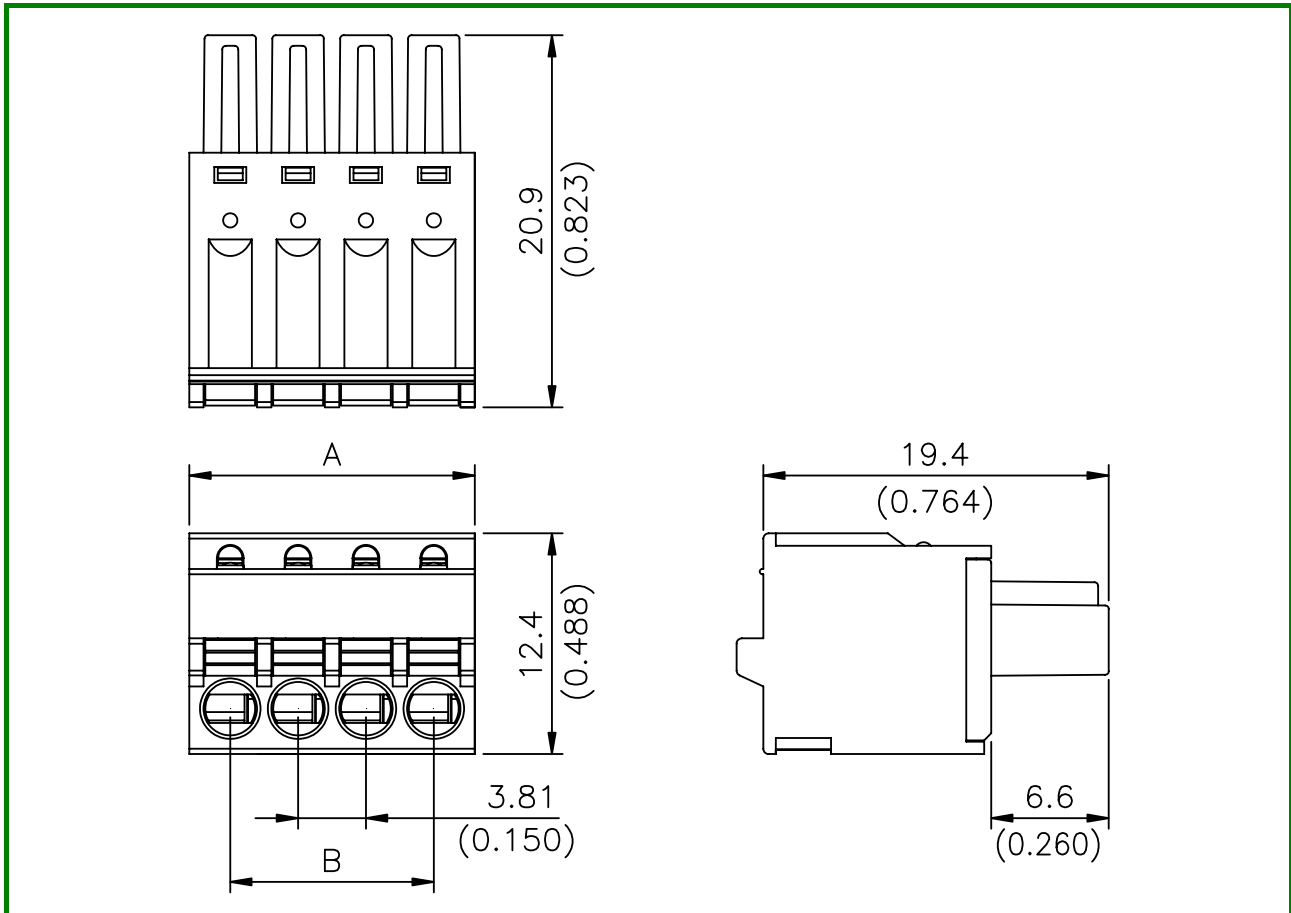

POLE DIM.	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	8.41 (0.331)	12.22 (0.481)	16.03 (0.631)	19.84 (0.781)	23.65 (0.931)	27.46 (1.081)	31.27 (1.231)	35.08 (1.381)	38.89 (1.531)	42.70 (1.681)	46.51 (1.831)	50.32 (1.981)	54.13 (2.131)	57.94 (2.281)	61.75 (2.431)
B	3.81 (0.150)	7.62 (0.300)	11.43 (0.450)	15.24 (0.600)	19.05 (0.750)	22.86 (0.900)	26.67 (1.050)	30.48 (1.200)	34.29 (1.350)	38.10 (1.500)	41.91 (1.650)	45.72 (1.800)	49.53 (1.950)	53.34 (2.100)	57.15 (2.250)