



NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
5. OPERATING FORCE: 425±100 CM/STANDARD
6. OPERATING TEMP: -30° to 85°C
7. CIRCUIT SP: 12 POSITIONS, 30° INDEX, NO STOPS
8. DIELECTRIC STRENGTH: 1000V RMS min.@Sea Level
9. ▲ DESIGNATE MAJOR FEATURE
10. ▲ HARDWARE SUPPLIED ON SWITCH – SEE BELOW
LOCKWASHER, & HEX NUT

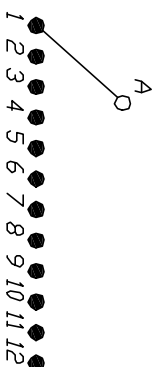



CONTACT CONFIGURATION

Timing: **SHORTING**

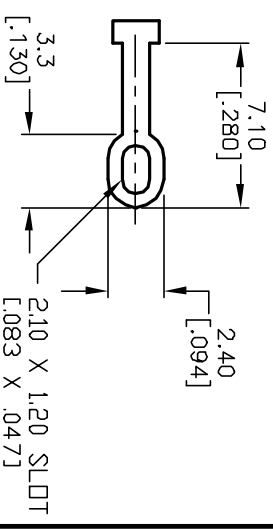

TERMINATION DETAIL

SCALE 2X

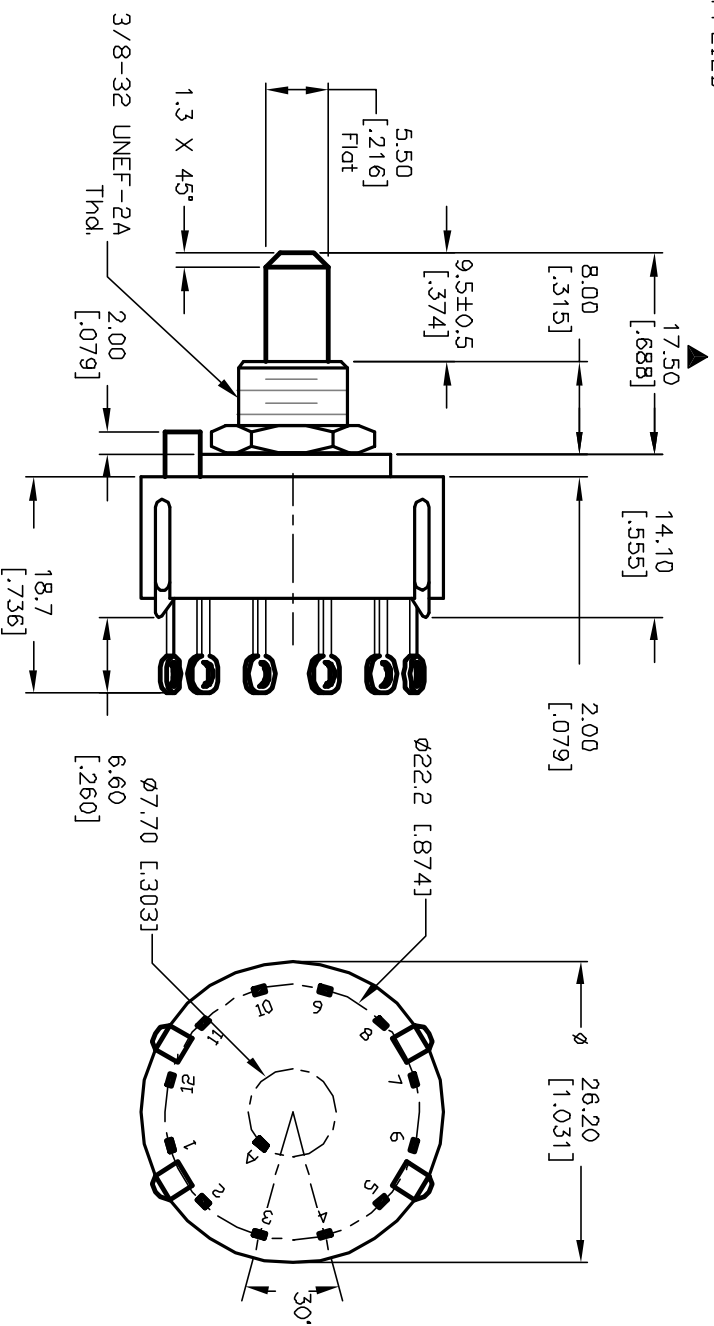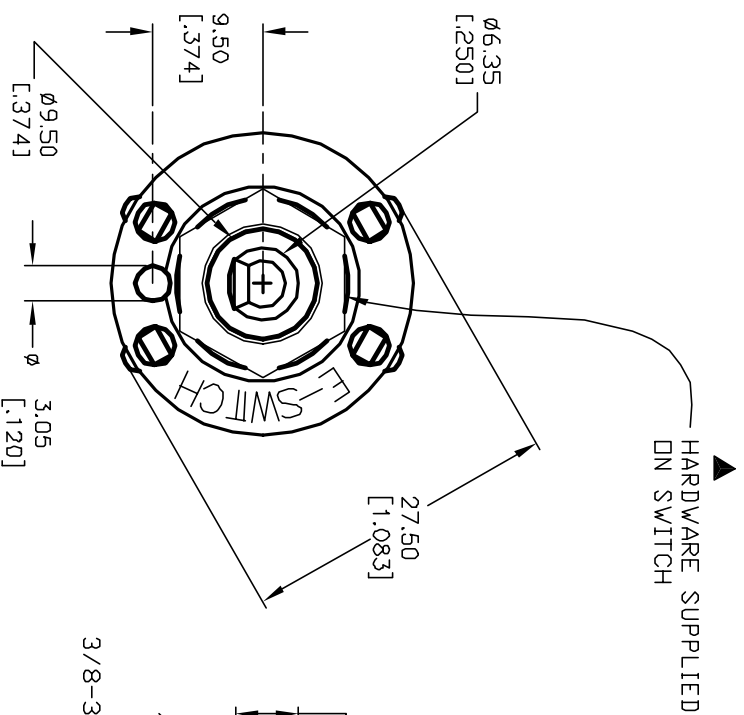

					TITLE				
					KC-10-A-(9.5mm) 01-S-L-S				
A	12822	RELEASED FOR PRODUCTION	2/18/03	CJB	SCALE	DATE	DR	DWG	REV
REV.	ECN No.	DESCRIPTION	DATE	CHKD	1.5:1	2/18/03	CJB	G527524	A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									