

Applications

- Band 7 Duplexer for Small cell BTS
- General Purpose Wireless




9 Pin 2 x 2.5 mm leadless SMT Package

Product Features

- 70 MHz Bandwidth
- High Attenuation
- Low Loss
- No External Matching Required
- Small Size: 2.0 x 2.5 x 1.0 mm
- Surface Mount Device
- RoHS Compliant, Pb-Free

Functional Block Diagram



Top View

General Description

The TQQ6107 is an exceptionally high performance BAW duplexer for Band 7. This filter is housed in a compact 2 x 2.5 mm package.

Low insertion loss, coupled with high attenuation makes this filter an ideal choice for small cell BTS needs.

Pin Configuration

Pin No.	Label
1	Downlink
3	Uplink
6	ANT
2, 4, 5, 7, 8, 9	GND

Ordering Information

Part No.	Description
TQQ6107	Band 7 Duplexer
TQQ6107-PCB	Evaluation Board

Standard T/R size = 2500 pieces on a 7" reel

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to +105°C
RF Input Power DL ⁽¹⁾	+29 dBm
RF Input Power UL (CW)	+23 dBm
Max DC Voltage	+5 V

Notes:

1. LTE, 5MHz, PAR = 8dB

Operation of this device outside the parameter ranges may cause permanent damage.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
T _{CASE}	-20		+85	°C

Electrical specifications are measured at specified test conditions.

Electrical Specifications – Downlink

Operating Temperature Range: -20 to +85 °C

Parameter	Conditions	Min	Typ ⁽¹⁾	Max	Units
Passband		2620	-	2690	MHz
Insertion Loss ⁽¹⁾	2620 – 2690 MHz	-	2.6	3.4	dB
Amplitude Variation	2620 – 2690 MHz	-	1.3	2.5	dB
Return Loss ⁽¹⁾	Antenna port	7	8.6	-	dB
Return Loss ⁽¹⁾	Downlink port	6	8.5	-	dB
Attenuation	600 – 960 MHz	23	26	-	dB
	960 – 1710 MHz	20	23	-	
	1710 – 1785 MHz	20	23	-	
	1785 – 1920 MHz	20	23	-	
	1920 – 2400 MHz	20	23	-	
	2400 – 2500 MHz	38	41	-	
	2500 – 2570 MHz	31	52	-	
	2570 – 2610 MHz	1	3.4	-	
	2700 – 2720 MHz	1	3	-	
	2720 – 2800 MHz	1	6.5	-	
2800 – 3400 MHz	33	35	-		
3400 – 3800 MHz	45	49	-		
3800 – 5150 MHz	32	38	-		
5150 – 5850 MHz	45	51	-		
2 nd Harmonic Distortion ⁽²⁾	Pout = +29dBm	63	72	-	dBc

Notes:

1. Average value over the indicated band
2. Additional 2nd harmonic improvement can be achieved using appropriate application. Refer to product technical notes for details.

Electrical Specifications – Uplink

Operating Temperature Range: -20 to +85 °C

Parameter	Conditions	Min	Typ ⁽¹⁾	Max	Units
Passband		2500	-	2570	MHz
Insertion Loss ⁽¹⁾	2500 – 2570 MHz	-	2.3	3.4	dB
Amplitude Variation	2500 – 2570 MHz	-	1.2	2.0	dB
Return Loss ⁽¹⁾	Antenna port	10	12	-	dB
Return Loss ⁽¹⁾	Uplink port	10	16	-	dB
Attenuation	600 – 1805 MHz	32	35	-	dB
	1805 – 1880 MHz	32	35	-	
	1880 – 2110 MHz	32	35	-	
	2110 – 2170 MHz	34	43	-	
	2170 – 2300 MHz	36	41	-	
	2300 – 2472 MHz	20	29	-	
	2590 – 2620 MHz	4	9.0	-	
	2620 – 2690 MHz	48	52	-	
	2690 – 2900 MHz	39	44	-	
	2900 – 3800 MHz	20	23	-	
	3800 – 5150 MHz	17	20	-	
	5150 – 5850 MHz	20	23	-	
Input / Output Impedance		-	50	-	Ohms

Notes:





1. Average value over the indicated band

Electrical Specifications – Isolation Uplink to Downlink


Operating Temperature Range: -20 to +85 °C

Parameter	Conditions	Min	Typ	Max	Units
Isolation in Uplink	2500 – 2570 MHz	50	57		dB
Isolation in Downlink	2620 – 2690 MHz	50	54		dB


Performance Plots – Downlink

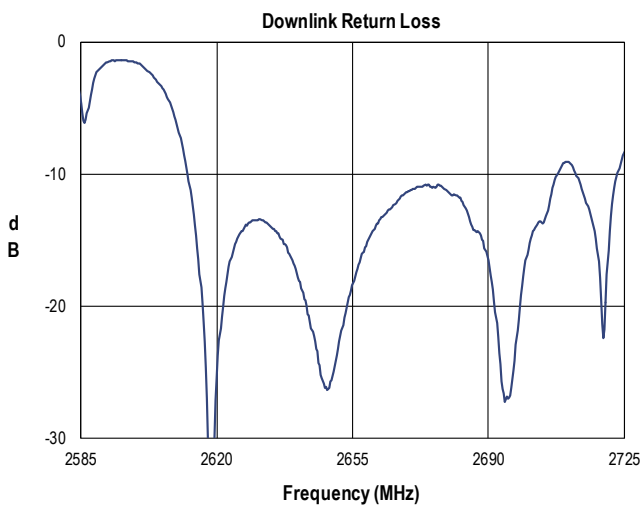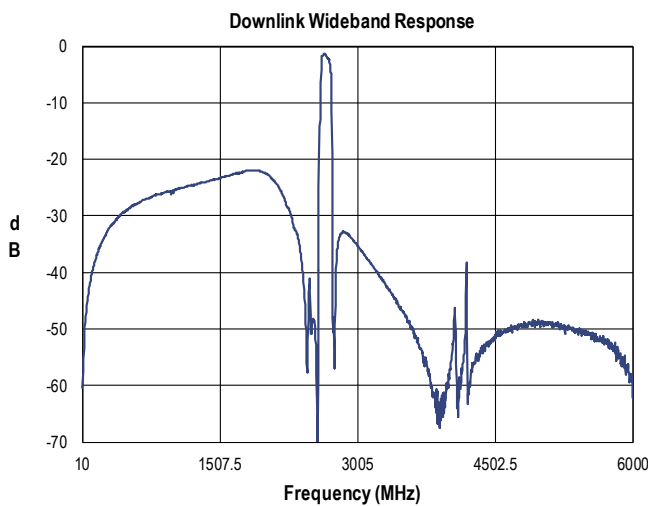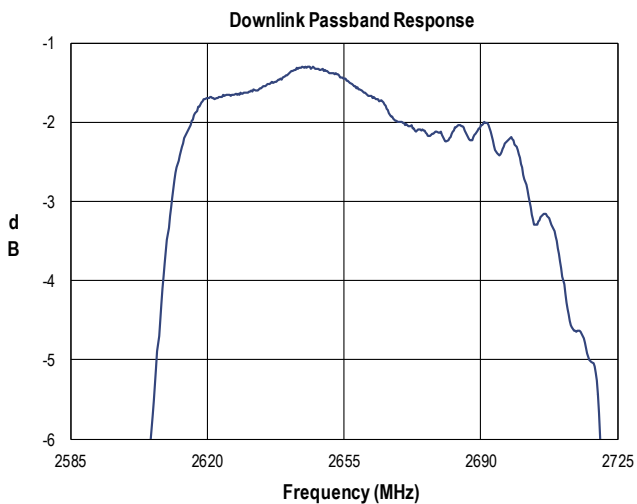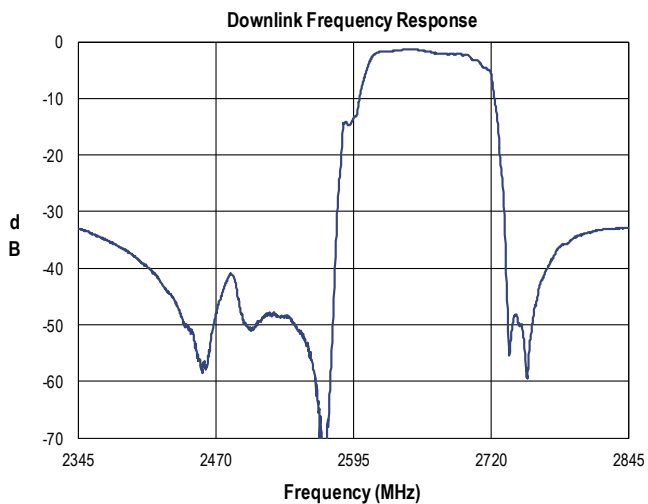





Downlink Path - Ant Port Impedance

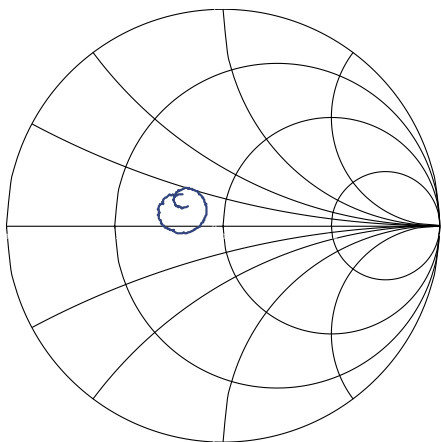


Downlink Port Impedance

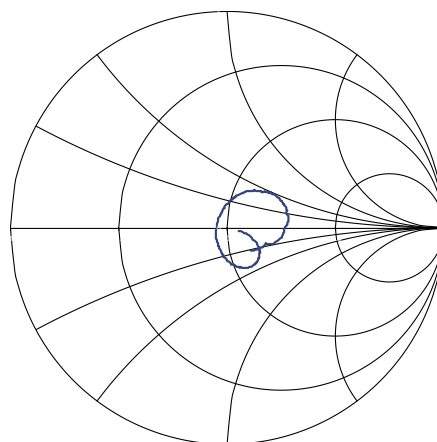


Performance Plots – Uplink

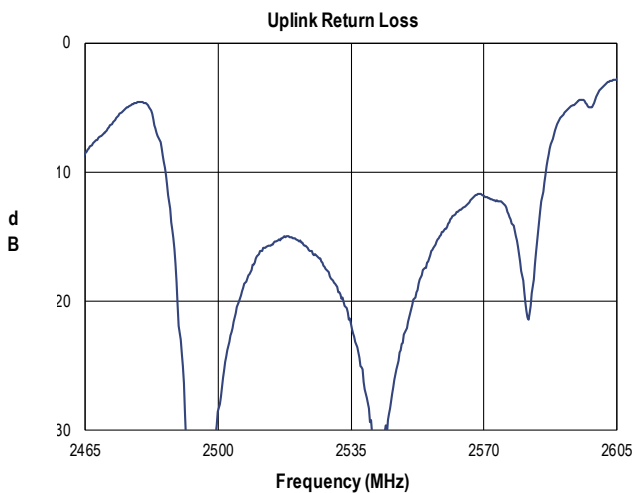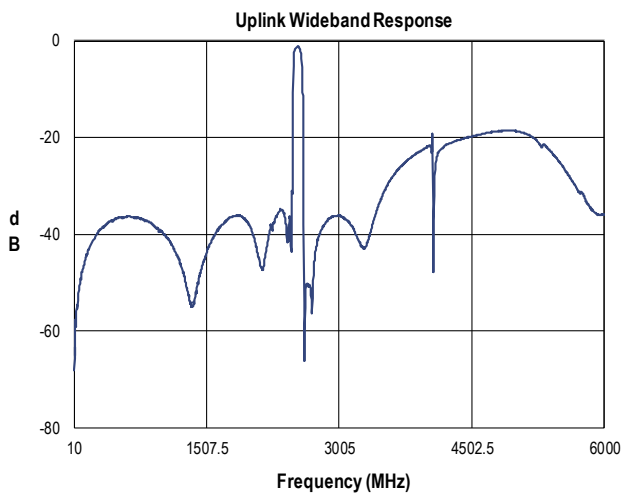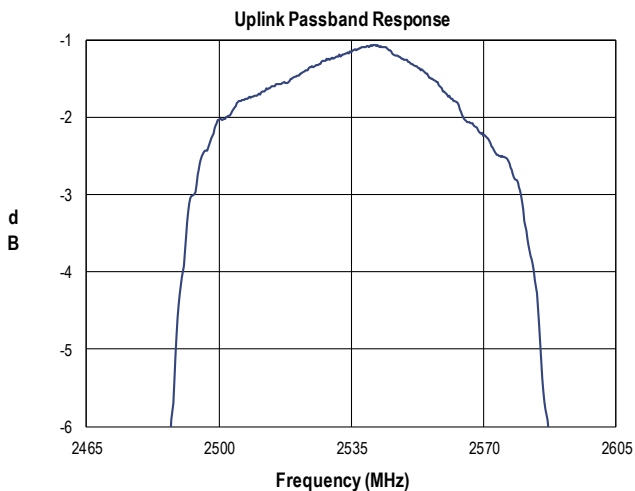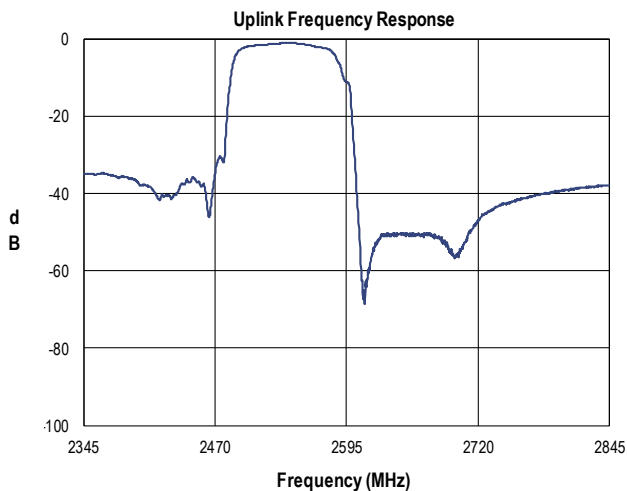

Uplink Path - Ant Port Impedance


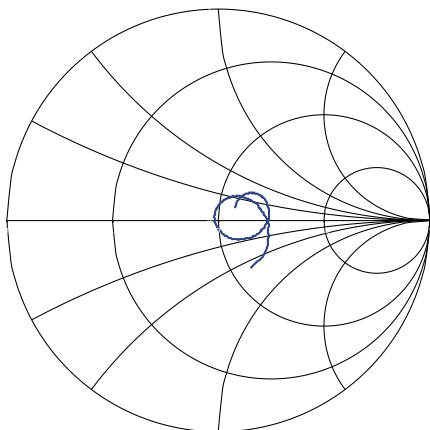


Uplink Port Impedance

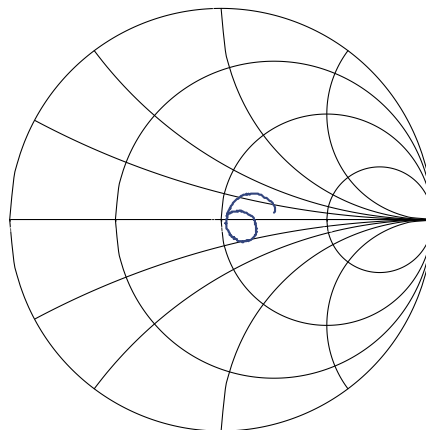

Performance Plots (cont'd.)




Test conditions unless otherwise noted: Temp= +25 °C

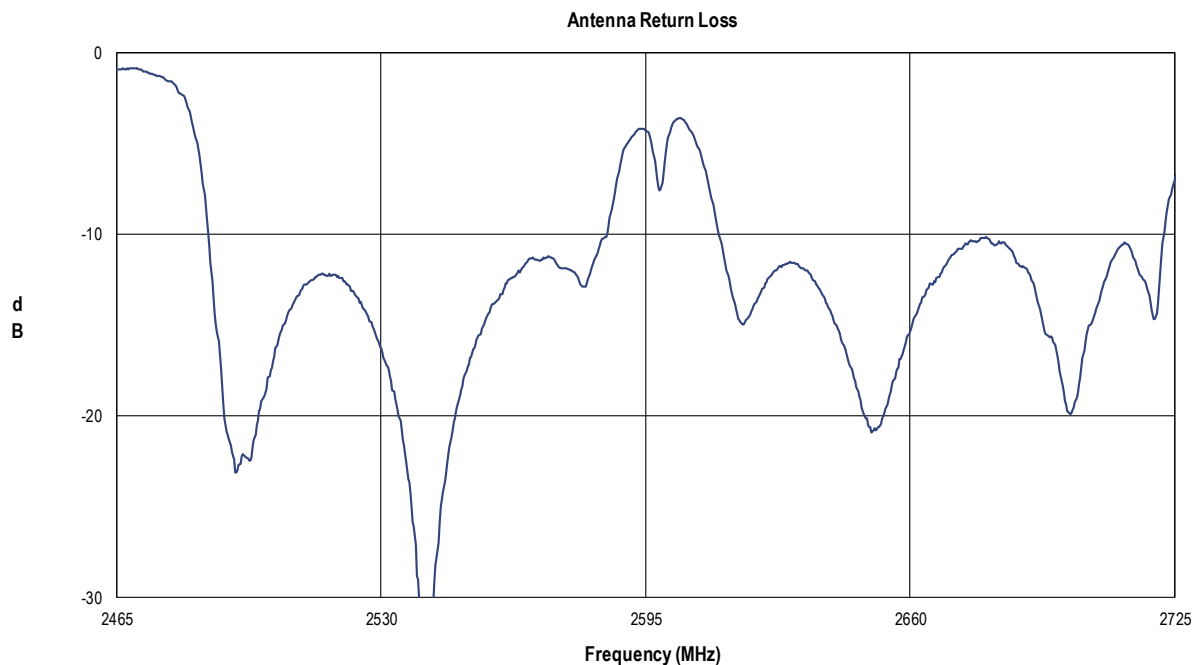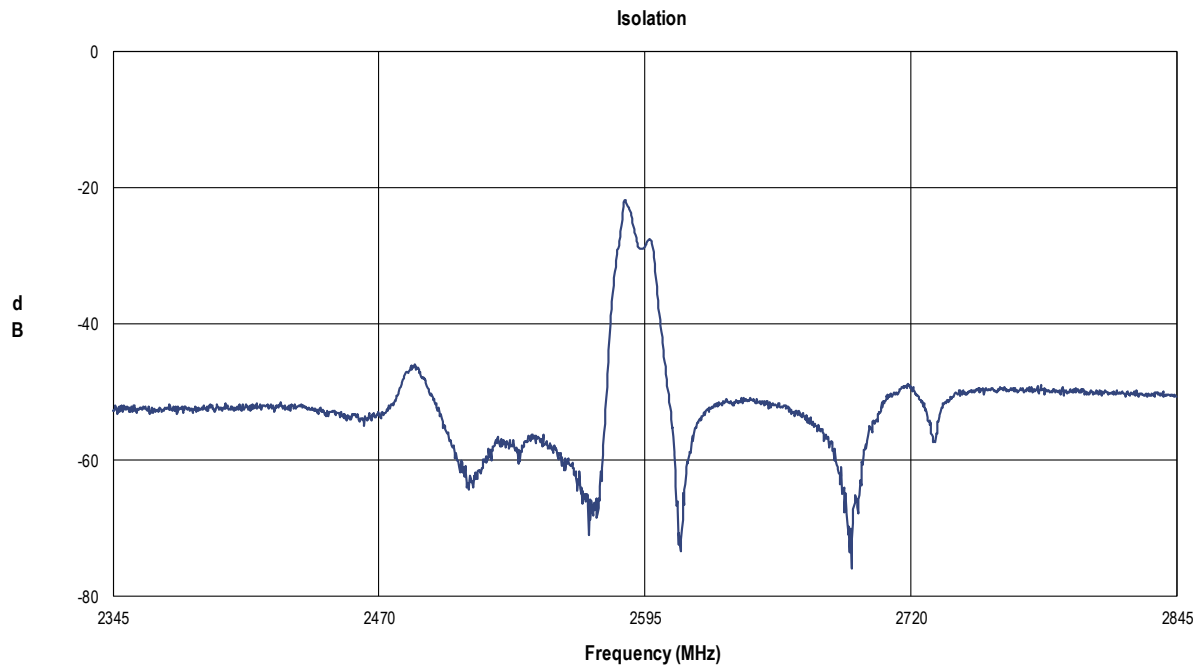

Package Marking and Dimensions

Package Marking

Product Identifier: Q6107
 Date Code: YYWW
 Assembly Code: aXXXX

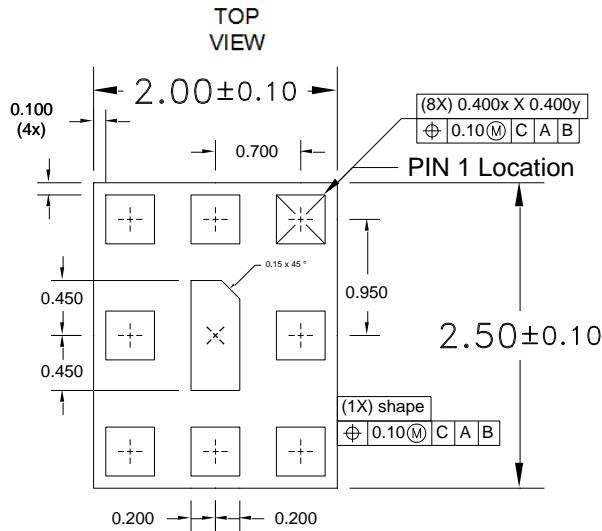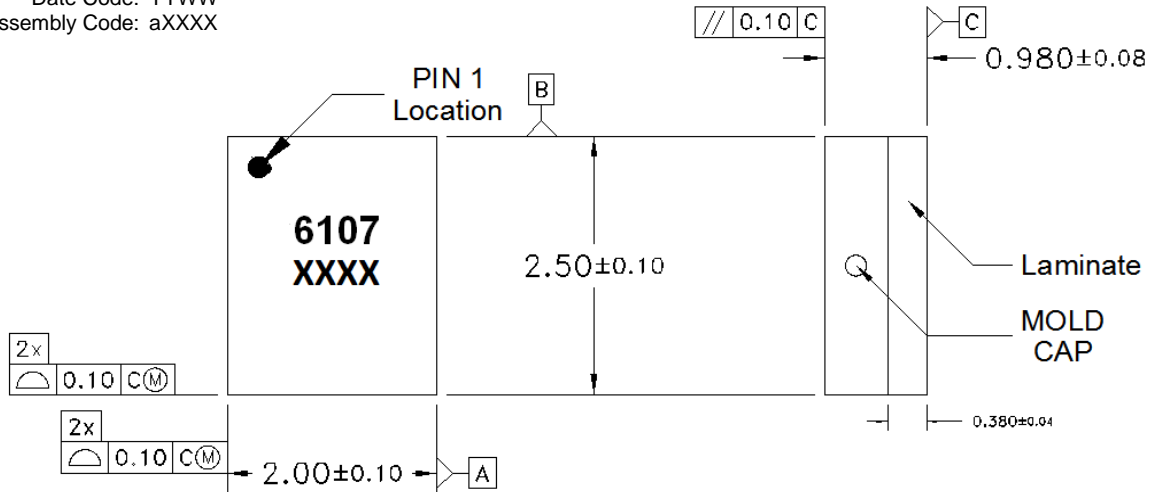


BOTTOM VIEW

BOTTOM PINS VIEW


Notes:

1. All dimensions are in millimeters. Angles are in degrees.
2. Except where noted, this part outline conforms to JEDEC standard MO-229.
3. Dimension and tolerance formats conform to ASME Y14.4M-1994.
4. The terminal #1 identifier and terminal numbering conform to JESD 95-1 SPP-012.

PCB Mounting Pattern

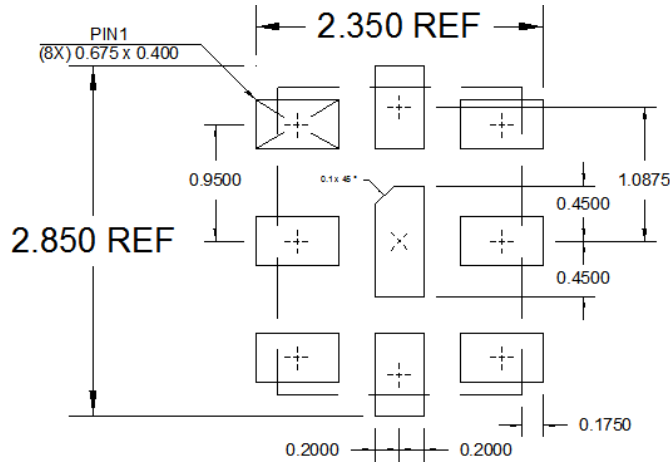

Top view recommended land pattern metallization.

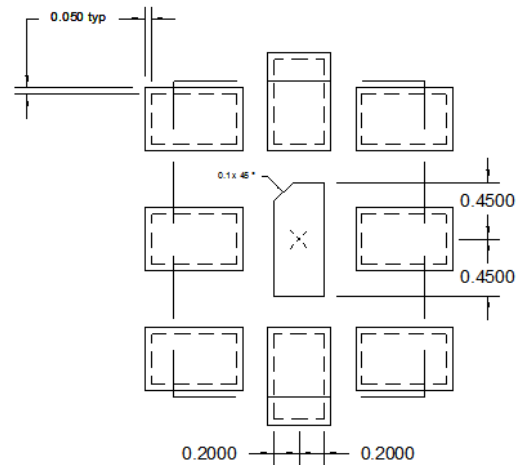


Top view recommended land pattern stencil aperture.

Notes:


1. All dimensions are in millimeters. Angles are in degrees.
2. Use 1 oz. copper minimum for top and bottom layer metal.

Tape and Reel Information – Carrier and Cover Tape Dimensions

Tape and reel specifications for this part are also available on the TriQuint website.
Standard T/R size = 2500 pieces on a 7" reel.

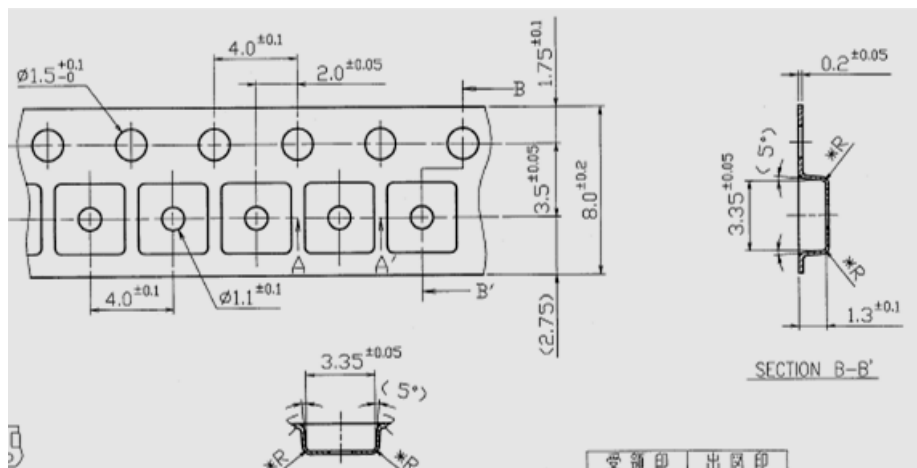


Feature	Measure	Symbol	Size (in)	Size (mm)
Cavity	Length	A0	0.092	2.34
	Width	B0	0.112	2.85
	Depth	K0	0.043	1.10
	Pitch	P1	0.157	4.00
Centerline Distance	Cavity to Perforation - Length Direction	P2	0.079	2.00
	Cavity to Perforation - Width Direction	F	0.138	3.50
Cover Tape	Width	C	0.213	5.40
Carrier Tape	Width	W	0.315	8.00

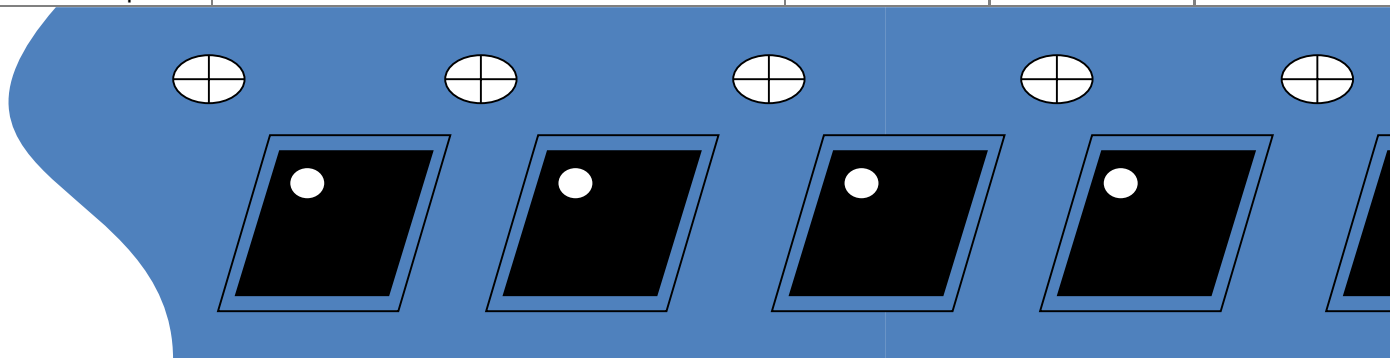

Tape and Reel Information – Reel Dimensions

Tape and reel specifications for this part are also available on the TriQuint website.
Standard T/R size = 2,500 pieces on a 7" reel.

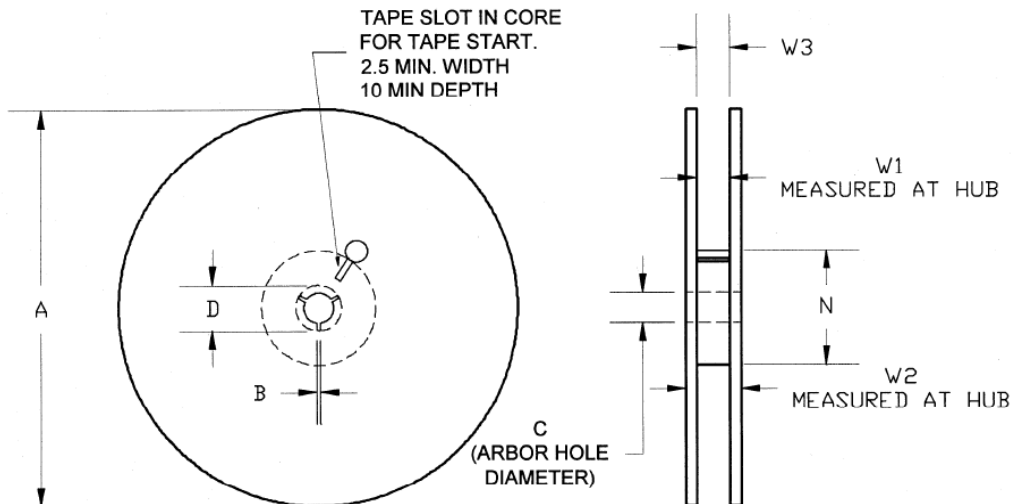

Feature	Measure	Symbol	Size (in)	Size (mm)
Flange	Diameter	A	6.969	177.0
	Thickness	W2	0.559	14.2
	Space Between Flange	W1	0.346	8.8
Hub	Outer Diameter	N	2.283	58.0
	Arbor Hole Diameter	C	0.512	13.0
	Key Slit Width	B	0.079	2.0
	Key Slit Diameter	D	0.787	20.0

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: Class 1B
Value: ≥ 500 V to < 1000 V
Test: Human Body Model (HBM)
Standard: ESDA / JEDEC Standard JS-001-2012

ESD Rating: Class C3
Value: > 1000 V
Test: Charged Device Model (CDM)
Standard: JEDEC Standard JESD22-C101

MSL Rating

MSL Rating: Level 3
Test: $+260$ °C convection reflow
Standard: JEDEC Standard IPC/JEDEC J-STD-020

Solderability

Compatible with both lead-free ($+260$ °C maximum reflow temperature) and tin/lead ($+245$ °C maximum reflow temperature) soldering processes.
Contact plating: ENIG (Electroless Nickel Immersion Gold)

Refer to [Soldering Profile](#) for recommended guidelines.

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($C_{15}H_{12}Br_4O_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: customer.support@qorvo.com

Tel: 877-800-8584

For information about the merger of RFMD and TriQuint as Qorvo:

Web: www.qorvo.com

For technical questions and application information: Email: sjcapplcations.engineering@triquint.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.