

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0757051624**

Status: **Active**

Overview: GbX I-Trac™ Backplane Connector System

Description: GbX I-Trac™ Vertical Header Module, 1.85mm by 3.70mm Pitch, Unguided, Dual End Walls, 11 Rows, 6 Columns, 132 Circuits, Mating Pin Length 5.70mm, Orientation Key B

Documents:


[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-75710-999 \(PDF\)](#)

[Packaging Specification PK-70873-587 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

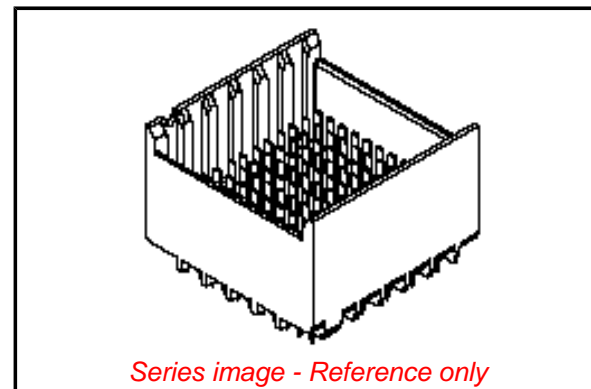

Agency Certification

UL E29179

General

Product Family	Backplane Connectors
Series	75705
Application	Backplane, Midplane, Orthogonal
Component Type	PCB Header
Overview	GbX I-Trac™ Backplane Connector System
Product Name	GbX I-Trac™
UPC	822350884150

Physical

Circuits (Loaded)	132
Circuits (maximum)	132
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.292/g
Number of Columns	6
Number of Pairs	6, Open Pin Field
Number of Rows	11
Orientation	Vertical
PC Tail Length	2.10mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	1.85mm, 3.70mm
Pitch - Termination Interface	1.00mm, 2.70mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55°C to +80°C
Termination Interface: Style	Through Hole - Compliant Pin

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/79/2015 (17
December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

75705 Series

Mates With

75710 GbX I-Trac™ Right Angle Receptacle Module

Use With

78232 GbX I-Trac™ Vertical Power Receptacle. 75234 Backplane Free Standing Guide Pin

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Electrical

Current - Maximum per Contact	1.0A
Data Rate	12.0 Gbps
Real Signals (per 25mm)	148
Shield Type	N/A
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-70873-587
Product Specification	PS-75710-999
Sales Drawing	SD-75705-001

Press-In Tool for	<u>0622018602</u>
Vertical Header 11- Row, 6-Column	
Backplane Insertion	<u>0621005110</u>
Tool for Signal Contact Insertion	

This document was generated on 06/10/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION