



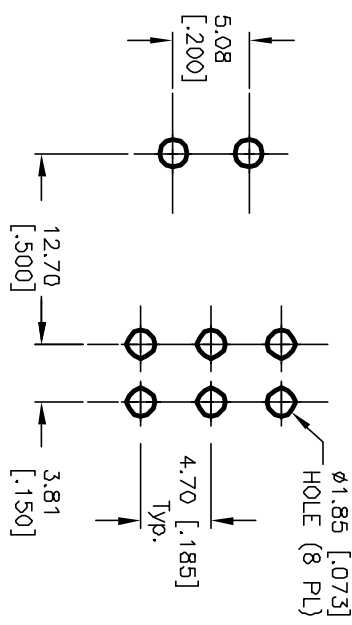

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: DPDT
CONTACT CONFIGURATION



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NDNE	DN
2-3,5-6	DPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC max.
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/Gold Plate over
Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C.

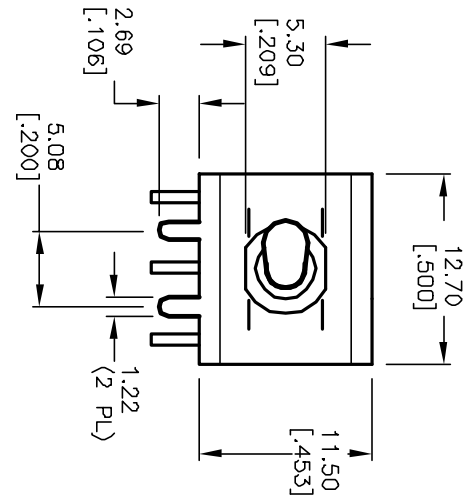

REAR VIEW

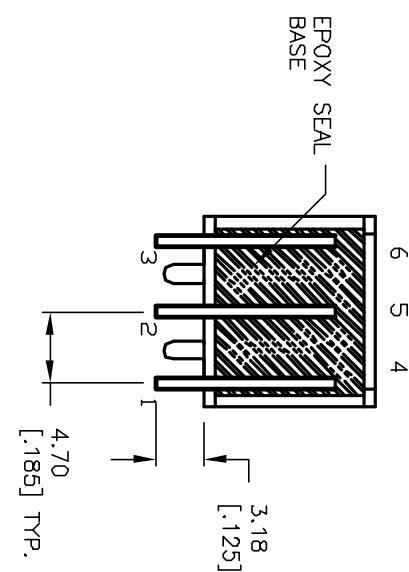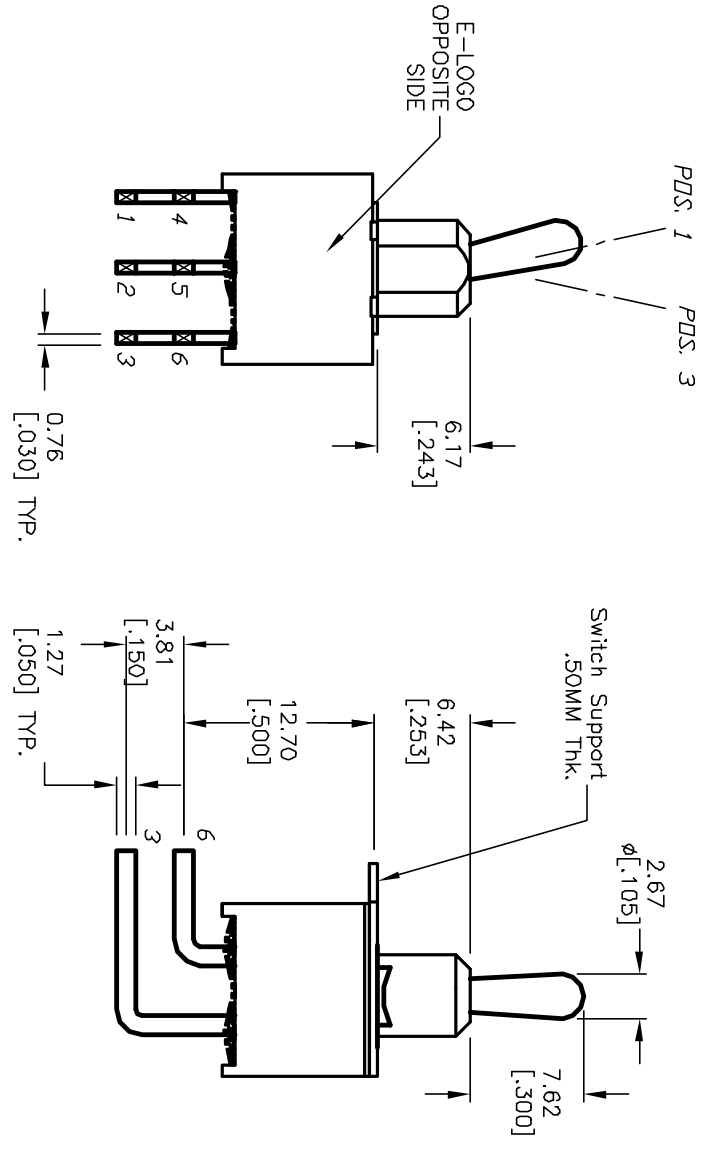

E-SWITCH®

TITLE		SCALE		DATE		DR		DWG		REV	
100A WDP-1 T2 B4 M6 R E (GOLD CONTACTS)		2:1		2/25/03		CJB		T102107		A	
RELEASED		2/25/03		CJB		CHKD					
DESCRIPTION		DATE		CHKD							
REV.		ECN No.									