

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0082244425](#)
Status: **Active**
Description: 2.00mm (.079") Pitch Round Conductor Flat Cable - 24 AWG (7 x 32) Stranded, Topcoat, 25 Circuits, Reel 30.48m (100.0') Length

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR61126
UL	E61522

General

Product Family	Cable
Series	24472
Crimp Quality Equipment	Yes
Geographic Area	Asia
Product Name	Ribbon

Physical

Cable Length	30.48m (100.0')
Circuits (Loaded)	25
Insulation	PVC
Packaging Type	Reel
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Temperature Range - Operating	-20°C to +105°C
Wire Size AWG	24
Wire/Cable Type	(7x32) Stranded, Topcoat

Electrical


Current - Maximum per Contact	N/A
Voltage - Maximum	300V

Material Info

Old Part Number	24472-25-100B
-----------------	---------------

Reference - Drawing Numbers

Sales Drawing	SD-24472-001
---------------	--------------

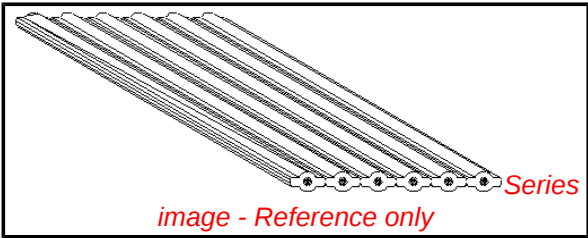

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS




Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[24472Series](#)

Use With
[52484](#) Wire-to-Board, IDT Receptacle Housing

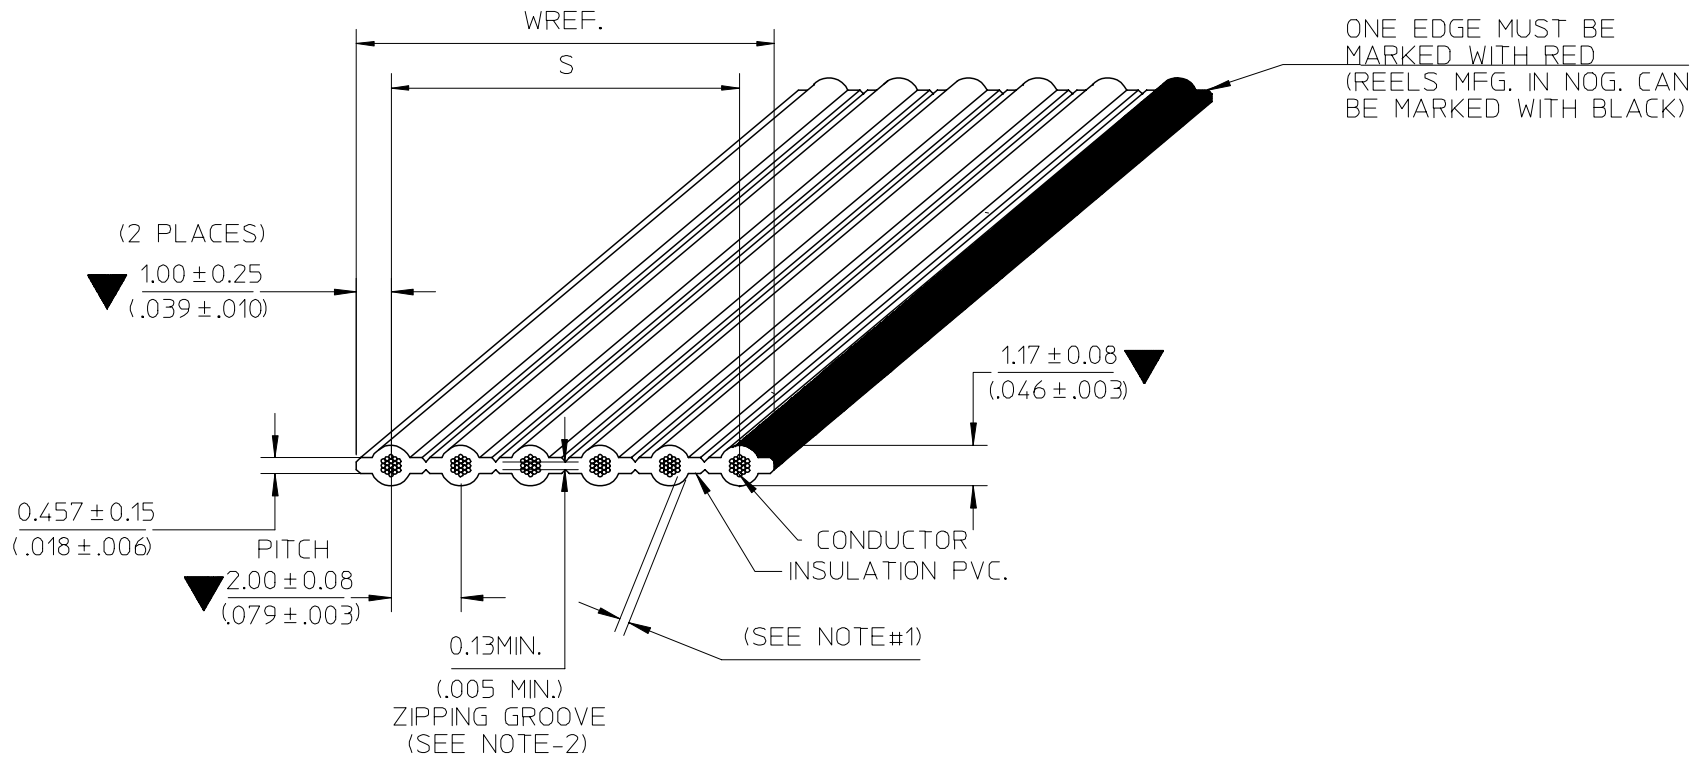

- NOTE :
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
 2. RIP TEST:
 - THE 0.13mm. (.005") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS.WITHOUT EXPOSING THE ADJACENT CONDUCTORS
 3. RoHS AND LEAD FREE COMPLIANT
 4. SPECIAL REQUIREMENT: N/A

B	E-07-0748	B ₂ : ADD NON-OPERATING TEMP. B ₃ : ADD SOLDERING CONDITION	07/10/01
A	N/A	NEW RELEASE	06/08/09
REV. HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL
 EC NO: THL2008-0015
 DRWN:CPANSAKHOM 2007/11/28
 CHKD:DNARINTARA 2007/11/29
 APPR:SVIRATJAPOL 2007/12/04

QUALITY SYMBOLS	DESCRIPTION
$\nabla=3$	
$\nabla=0$	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES	$\pm \text{---}$
3 PLACES	$\pm \text{---}$
2 PLACES	$\pm \text{---}$
1 PLACE	$\pm \text{---}$
ANGULAR $\pm \text{---}^\circ$	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/08/09
CHECKED BY	DATE
PMEECHAI	2006/08/09
APPROVED BY	DATE
SVIRATJAPOL	2006/08/09
MATERIAL NO.	
SEE CHART	
SIZE	
A4	

SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
TITLE		
FCB ROUND CONDUCTOR 2.00MM(.079)CENTERS PVC. 24AWG STRANDED TOPCOATED		
MOLEX MOLEX INCORPORATED		
DOCUMENT NO.		SHEET NO.
SD-24472-001		1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

7	6	5	4	3	2	1																																																																
E	SPECIFICATIONS PHYSICAL CONDUCTOR SPACING _ _ _ _ _ 2.00 (.079") C TO C WIRE GAUGE _ _ _ _ _ 24 AWG(7/32) STRANDED TOPCOATED INSULATION _ _ _ _ _ P.V.C GRAY (LEAD FREE) AGENCY U.L. STYLE NO. _ _ _ _ _ 2651 TEMPERATURE RATING _ _ _ _ _ -20°C TO 105°C VOLTAGE RATING _ _ _ _ _ 300V.MAX. FLAMMABILITY RATING _ _ _ _ _ VW-1 ELECTRICAL CONDUCTOR RESISTANCE (D.C.) _ _ _ _ _ 24.0 m OHMS/FT. MAX. CHARACTERISTIC IMPEDANCE _ _ _ _ _ 148 OHMS NOM. (GS) 106 OHMS NOM. (GSG) CAPACITANCE _ _ _ _ _ 8.5 pF/FT. NOM. (GS) 13.4 pF/FT. NOM. (GSG) PROPAGATION DELAY _ _ _ _ _ 1.4 ns/FT. NOM. INSULATION RESISTANCE _ _ _ _ _ 10M OHMS (10FT. SAMPLE) DIELECTRIC WITHSTAND VOLTAGE _ _ _ _ _ 2000 VRMS/MINUTE GENERAL B₂ NON-OPERATING TEMPERATURE _ _ _ _ _ -20°C TO 105°C FAULTS AND/OR SPLICES _ _ _ _ _ 1/REEL MAX. 100⁺³₀ FT. (30.48^{+0.914}₀ M.)/REEL 20FT. (6.096M.) MIN. LENGTH B₁ SOLDERING CONDITION SOLDER TEMPERATURE _ _ _ _ _ -260°C. MAX. SOLDERING TIME _ _ _ _ _ 3 SECOND, MAX. INSULATION SHRINK _ _ _ _ _ 2MM. NOM						E																																																															
D							D																																																															
C							C																																																															
B							B																																																															
A	<table><tr><td rowspan="5">SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHKD:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04</td><td rowspan="5">QUALITY SYMBOLS ▼ = ▽ = </td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td>DIMENSION STYLE</td><td>SCALE</td><td>DESIGN UNITS</td><td rowspan="5"> THIRD ANGLE PROJECTION </td></tr><tr><td colspan="2"></td><td>MM/IN</td><td>NTS</td><td>INCH</td></tr><tr><td></td><td>mm</td><td>INCH</td><td>DRAWN BY</td><td>DATE</td><td>TITLE</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td><td>CPANSAKHOM</td><td>2006/08/09</td><td rowspan="2">FCB ROUND CONDUCTOR 2.00MM(.079)CENTERS PVC. 24AWG STRANDED TOPCOATED</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td><td>CHECKED BY</td><td>DATE</td></tr><tr><td>2 PLACES</td><td>± ---</td><td>± ---</td><td>PMEECHAI</td><td>2006/08/09</td><td rowspan="2">MOLEX INCORPORATED</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td><td>APPROVED BY</td><td>DATE</td></tr><tr><td colspan="2">ANGULAR ± ---°</td><td>SVIRATJAPOL</td><td>2006/08/09</td><td>MATERIAL NO.</td><td>DOCUMENT NO.</td><td>SHEET NO.</td></tr><tr><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">SEE CHART</td><td colspan="2">SD-24472-001</td><td>2 OF 3</td></tr><tr><td colspan="2"></td><td>SIZE</td><td colspan="4">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td><td></td></tr></table>						SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHKD:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	QUALITY SYMBOLS ▼ = ▽ =	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			MM/IN	NTS	INCH		mm	INCH	DRAWN BY	DATE	TITLE	4 PLACES	± ---	± ---	CPANSAKHOM	2006/08/09	FCB ROUND CONDUCTOR 2.00MM(.079)CENTERS PVC. 24AWG STRANDED TOPCOATED	3 PLACES	± ---	± ---	CHECKED BY	DATE	2 PLACES	± ---	± ---	PMEECHAI	2006/08/09	MOLEX INCORPORATED	1 PLACE	± ---	± ---	APPROVED BY	DATE	ANGULAR ± ---°		SVIRATJAPOL	2006/08/09	MATERIAL NO.	DOCUMENT NO.	SHEET NO.	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-24472-001		2 OF 3			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					A
SEE CHANGE DETAIL EC NO: THL2008-0015 DRWN:CPANSAKHOM 2007/11/28 CHKD:DNARINTARA 2007/11/29 APPR:SVIRATJAPOL 2007/12/04	QUALITY SYMBOLS ▼ = ▽ =	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS			THIRD ANGLE PROJECTION																																																													
				MM/IN	NTS	INCH																																																																
			mm	INCH	DRAWN BY	DATE				TITLE																																																												
		4 PLACES	± ---	± ---	CPANSAKHOM	2006/08/09				FCB ROUND CONDUCTOR 2.00MM(.079)CENTERS PVC. 24AWG STRANDED TOPCOATED																																																												
		3 PLACES	± ---	± ---	CHECKED BY	DATE																																																																
2 PLACES	± ---	± ---	PMEECHAI	2006/08/09	MOLEX INCORPORATED																																																																	
1 PLACE	± ---	± ---	APPROVED BY	DATE																																																																		
ANGULAR ± ---°		SVIRATJAPOL	2006/08/09	MATERIAL NO.	DOCUMENT NO.	SHEET NO.																																																																
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-24472-001		2 OF 3																																																																
		SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																			
tb_frame_A4_P_ME_T Rev. E 2006/04/15	6	5	4	3	2	1																																																																

