
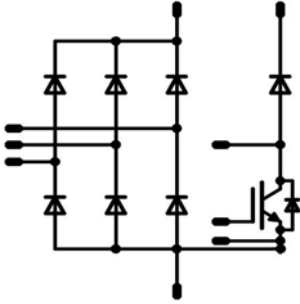


flowCON 0	1200V / 75A
<div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Features</p> <ul style="list-style-type: none"> Input rectifier Optionally with brake chopper Vincotech clip-in housing </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Target Applications</p> <ul style="list-style-type: none"> Motor drives UPS </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Types</p> <ul style="list-style-type: none"> V23990-P640-G-PM with brake choper V23990-P640-H-PM without brake chopper </div>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">flow0 housing</p>  </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #000080; color: white; margin: 0;">Schematic</p>  </div>

Maximum Ratings

Parameter	Symbol	Condition	Value	Unit
Input Rectifier Diode				
Repetitive peak reverse voltage	V_{RRM}	$T_j = T_{jmax}$	1600	V
Forward current per diode	I_{FAV}	DC current $T_j = T_{jmax}$ $T_h = 80^\circ\text{C}$	63	A
Surge forward current	I_{FSM}	$t_p = 10\text{ms}$ half sine wave $T_j = 45^\circ\text{C}$	850	A
I^2t -value	I^2t		3610	A^2s
Power dissipation per Diode	P_{tot}	$T_j = T_{jmax}$ $T_h = 80^\circ\text{C}$	67	W
Maximum junction temperature	T_{jmax}		150	$^\circ\text{C}$

Maximum Ratings

Parameter	Symbol	Condition	Value	Unit
Transistor BRC				
Collector-emitter break down voltage	V_{CE}		1200	V
DC collector current	I_C	$T_j = T_{jmax}$ $T_h = 80^\circ C$	34	A
Repetitive peak collector current	I_{cpuls}	t_p limited by T_{jmax}	105	A
Power dissipation per IGBT	P_{tot}	$T_j = T_{jmax}$ $T_h = 80^\circ C$	65	W
Gate-emitter peak voltage	V_{GE}		± 20	V
Short circuit ratings*	t_{SC} V_{CC}	$T_j \leq 150^\circ C$ $V_{GE} = 15V$	10 900	μs V
Maximum junction temperature	T_{jmax}		150	$^\circ C$
* It is recommended to not exceed 1000 short circuit situations in the lifetime of the module and to allow at least 1s between short circuits				
BRC inverse diode				
Peak Repetitive Reverse Voltage	V_{RRM}		1200	V
DC forward current	I_F	$T_j = T_{jmax}$ $T_h = 80^\circ C$	6	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	6	A
Power dissipation per Diode	P_{tot}	$T_j = T_{jmax}$ $T_h = 80^\circ C$	19	W
Maximum junction temperature	T_{jmax}		150	$^\circ C$
Diode BRC				
Peak Repetitive Reverse Voltage	V_{RRM}		1200	V
DC forward current	I_F	$T_j = T_{jmax}$ $T_h = 80^\circ C$	23	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	50	A
Power dissipation per Diode	P_{tot}	$T_j = T_{jmax}$ $T_h = 80^\circ C$	38	W
Maximum junction temperature	T_{jmax}		150	$^\circ C$
Thermal properties				
Storage temperature	T_{stg}		-40...+125	$^\circ C$
Operation temperature	T_{op}		-40...+110	$^\circ C$

Maximum Ratings

Parameter	Symbol	Condition	Value	Unit
Insulation properties				
Insulation voltage	V_{is}	t=2 s DC voltage	4000	V
Creepage distance			min 12.7	mm
Clearance			min 12.7	mm

Characteristic Values

Parameter	Symbol	Conditions					Value			Unit		
		$V_{GE}(V)$ or $V_{ES}(V)$	$V_r(V)$ or $V_{CE}(V)$ or $V_{DS}(V)$	$I_c(A)$ or $I_r(A)$ or $I_b(A)$	$T(^{\circ}C)$	Min	Typ	Max				
Input Rectifier Bridge												
Forward voltage	V_F				75	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$	1	1,17 1,13	1,5	V		
Threshold voltage (for power loss calc. only)	V_{Io}					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		0,91 0,78		V		
Slope resistance (for power loss calc. only)	r_t					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		3 5		m Ω		
Reverse leakage current	I_r			1500		$T_j=25^{\circ}C$ $T_j=150^{\circ}C$			0,5 1,5	mA		
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness $\leq 50\mu m$ $\lambda=0.61W/mK$						1,04		K/W		
Thermal resistance chip to case per chip	R_{thJC}							n.A.		K/W		
Transistor BRC												
Gate emitter threshold voltage	$V_{GE(th)}$	$V_{CE}=V_{GE}$			0,0015	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$	5	5,8	6,5	V		
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		35	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$	1,3	1,69 1,88	2,2	V		
Collector-emitter cut-off	I_{CES}		0	1200		$T_j=25^{\circ}C$ $T_j=125^{\circ}C$			0,25	mA		
Gate-emitter leakage current	I_{GES}		20	0		$T_j=25^{\circ}C$ $T_j=125^{\circ}C$			650	nA		
Integrated Gate resistor	R_{gint}							6		Ω		
Turn-on delay time	$t_{d(on)}$	$R_{gon}=32\Omega$ $R_{goff}=16\Omega$	15	600	35	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		65		ns		
Rise time	t_r					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$					26	ns
Turn-off delay time	$t_{d(off)}$					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$					673	ns
Fall time	t_f					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$					171	ns
Turn-on energy loss per pulse	E_{on}					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$					3,34	mWs
Turn-off energy loss per pulse	E_{off}	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$	3,99	mWs								
Input capacitance	C_{ies}	$f=1MHz$	0	25		$T_j=25^{\circ}C$		2,53		nF		
Output capacitance	C_{oss}							0,132		nF		
Reverse transfer capacitance	C_{rss}							0,115		nF		
Gate charge	Q_{Gate}		15	960	35	$T_j=25^{\circ}C$		203		nC		
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness $\leq 50\mu m$ $\lambda=0.61W/mK$						1,08		K/W		
Thermal resistance chip to case per chip	R_{thJC}							n.A.		K/W		
BRC inverse diode												
Diode forward voltage	V_f				3	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$	1	1,61 1,56	2,3	V		
Reverse leakage current	I_r			1200		$T_j=25^{\circ}C$ $T_j=125^{\circ}C$			250	μA		
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness $\leq 50\mu m$ $\lambda=0.61W/mK$						3,62		K/W		
Thermal resistance chip to case per chip	R_{thJC}							n.A.		K/W		

Characteristic Values


Parameter	Symbol	Conditions					Value			Unit
		$V_{GE}(V)$ or $V_{ES}(V)$	$V_r(V)$ or $V_{CE}(V)$ or $V_{DS}(V)$	$I_c(A)$ or $I_f(A)$ or $I_p(A)$	$T(^{\circ}C)$	Min	Typ	Max		
Diode BRC										
Diode forward voltage	V_F				35	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$	1	1,7 1,68	2,4	V
Reverse leakage current	I_r			1200		$T_j=25^{\circ}C$ $T_j=125^{\circ}C$			250	mA
Peak reverse recovery current	I_{RRM}	$R_{gon}=32\Omega$ $R_{gorf}=16\Omega$	15	600	35	$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		56,4		A
Reverse recovery time	t_{rr}					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		279		ns
Reverse recovered charge	Q_{rr}					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		5,15		mC
Peak rate of fall of reverse recovery current	$di(rec)max/dt$					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		2460		A/ms
Reverse recovery energy	E_{rec}					$T_j=25^{\circ}C$ $T_j=125^{\circ}C$		1,94		mWs
Thermal resistance chip to heatsink per chip	R_{thJH}	Thermal grease thickness $\leq 50\mu m$ $\lambda=0.61W/mK$						1,86		K/W
Thermal resistance chip to case per chip	R_{thJC}							n.A.		K/W

Brake

Figure 1 Brake IGBT

Typical output characteristics

$I_C = f(V_{CE})$

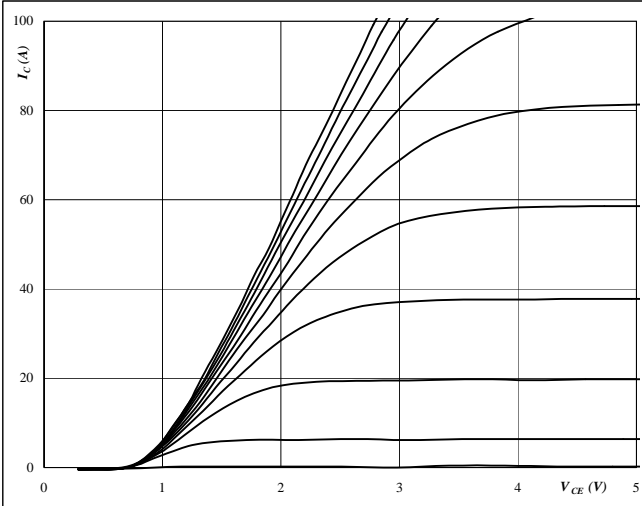


At

 $t_p = 250 \mu\text{s}$
 $T_J = 25 \text{ }^\circ\text{C}$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 2 Brake IGBT

Typical output characteristics

$I_C = f(V_{CE})$

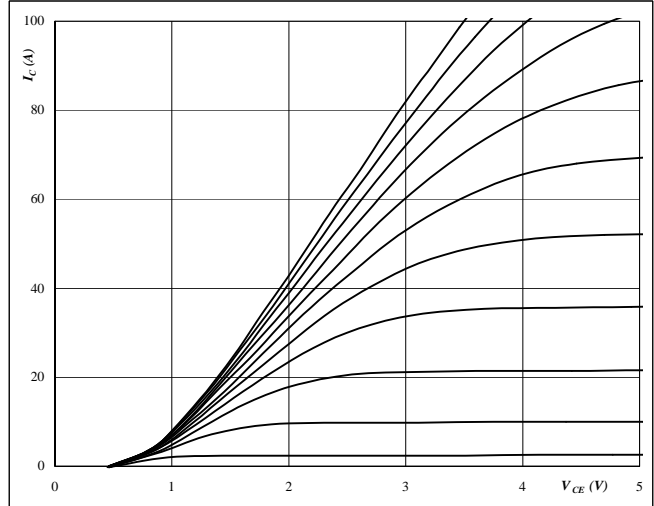


At

 $t_p = 250 \mu\text{s}$
 $T_J = 125 \text{ }^\circ\text{C}$
 V_{GE} from 7 V to 17 V in steps of 1 V

Figure 3 Brake IGBT

Typical transfer characteristics

$I_C = f(V_{GE})$

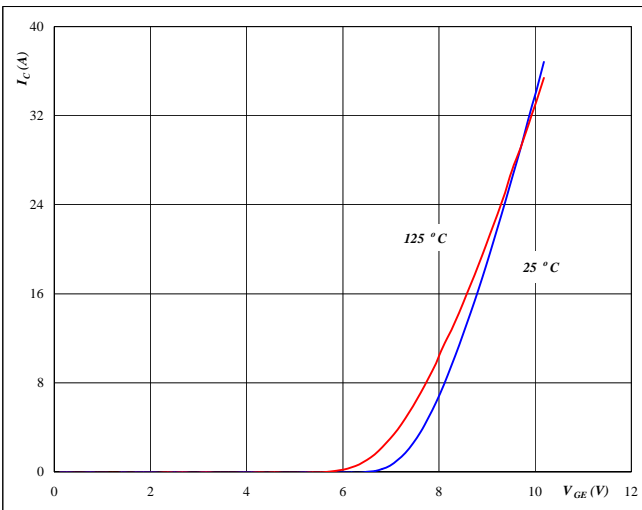


At

 $t_p = 250 \mu\text{s}$
 $V_{CE} = 10 \text{ V}$
Figure 4 Brake FRED

Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

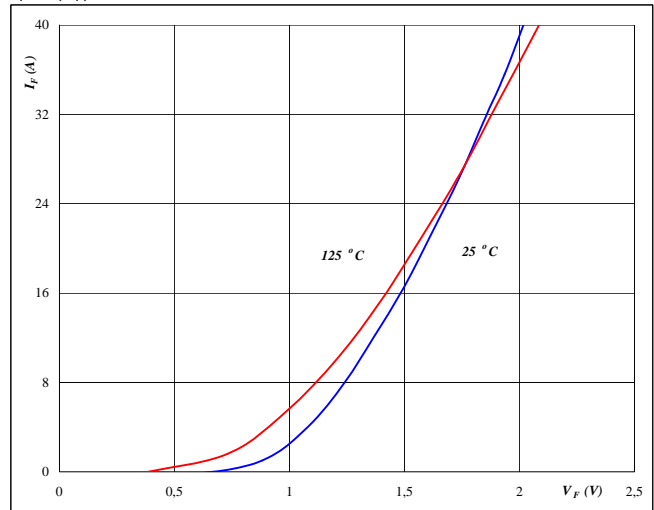


At

 $t_p = 250 \mu\text{s}$

Brake


Figure 5 Brake IGBT

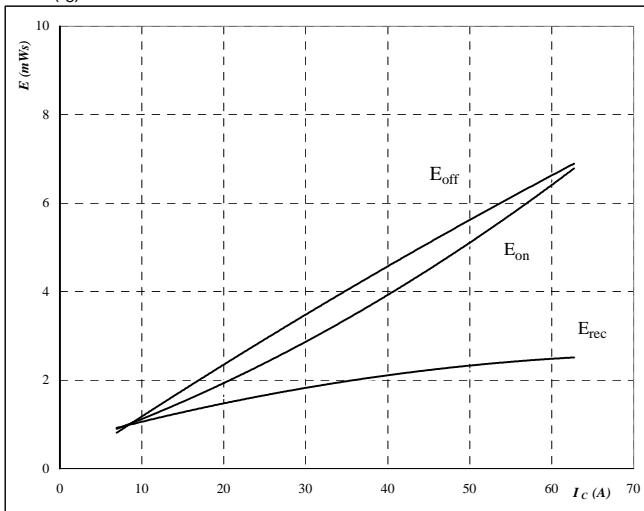Typical switching energy losses as a function of collector current
 $E = f(I_C)$


With an inductive load at

$T_j =$	125	°C
$V_{CE} =$	600	V
$V_{GE} =$	15	V
$R_{gon} =$	32	Ω
$R_{goff} =$	16	Ω


Figure 6 Brake IGBT

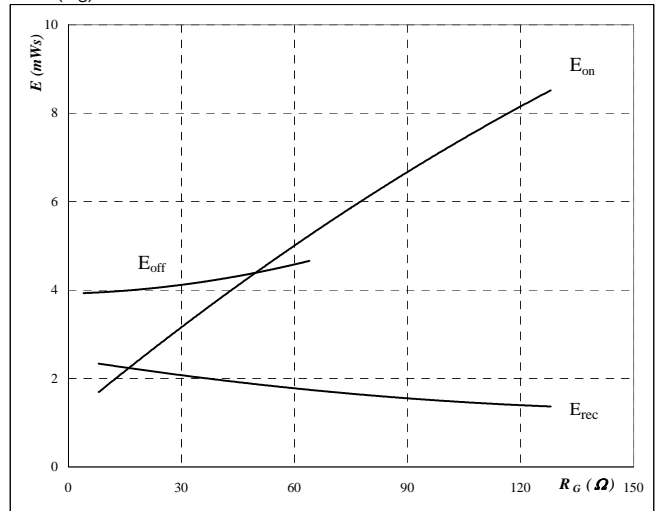Typical switching energy losses as a function of gate resistor
 $E = f(R_G)$


With an inductive load at

$T_j =$	125	°C
$V_{CE} =$	600	V
$V_{GE} =$	15	V
$I_C =$	35	A


Figure 7 Brake IGBT

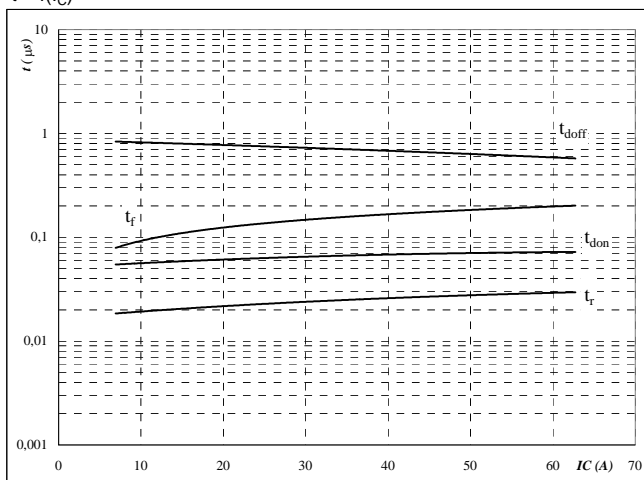Typical switching times as a function of collector current
 $t = f(I_C)$


With an inductive load at

$T_j =$	125	°C
$V_{CE} =$	600	V
$V_{GE} =$	15	V
$R_{gon} =$	32	Ω
$R_{goff} =$	16	Ω

Figure 8 Brake IGBT

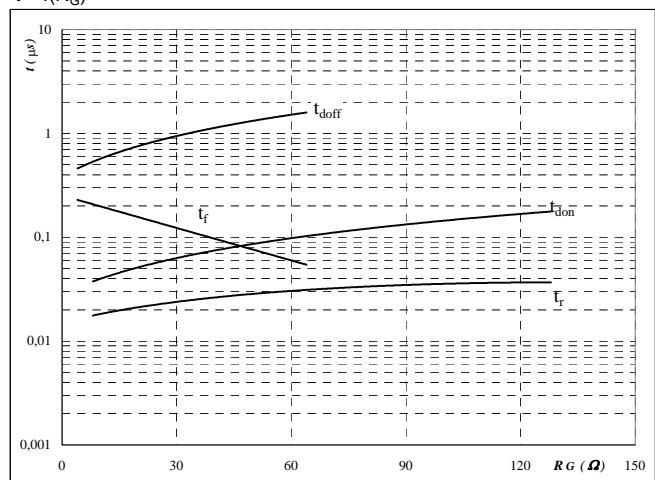
Typical switching times as a function of gate resistor
 $t = f(R_G)$


With an inductive load at

$T_j =$	125	°C
$V_{CE} =$	600	V
$V_{GE} =$	15	V
$I_C =$	35	A

Brake
Figure 9
**IGBT transient thermal impedance
 as a function of pulse width**

$$Z_{thJH} = f(t_p)$$

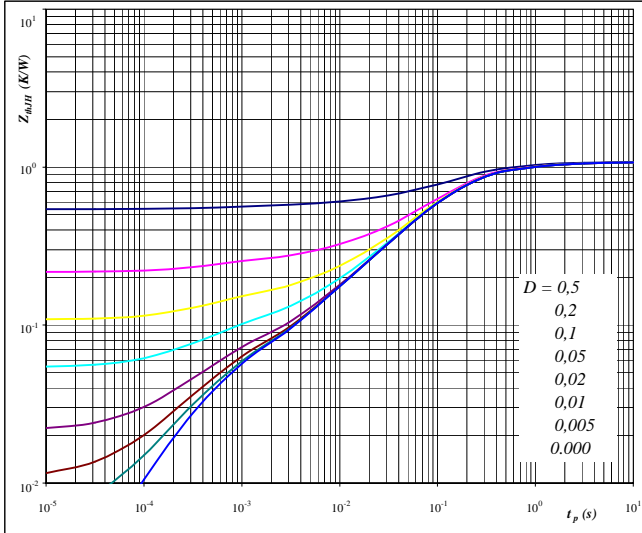


With

$$D = \frac{t_p}{T}$$

$$R_{thJH} = 1,08 \quad \text{K/W}$$

Figure 10
**FRED transient thermal impedance
 as a function of pulse width**

$$Z_{thJH} = f(t_p)$$

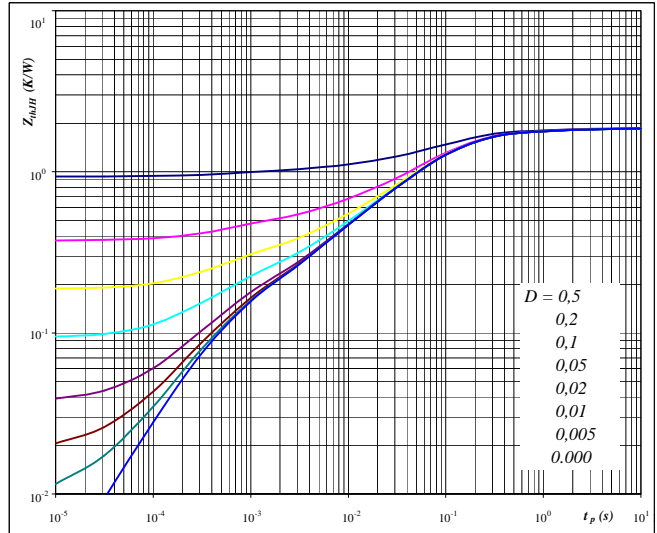

With

$$D = \frac{t_p}{T}$$


$$R_{thJH} = 1,86 \quad \text{K/W}$$

Brake

Figure 11 Brake IGBT


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

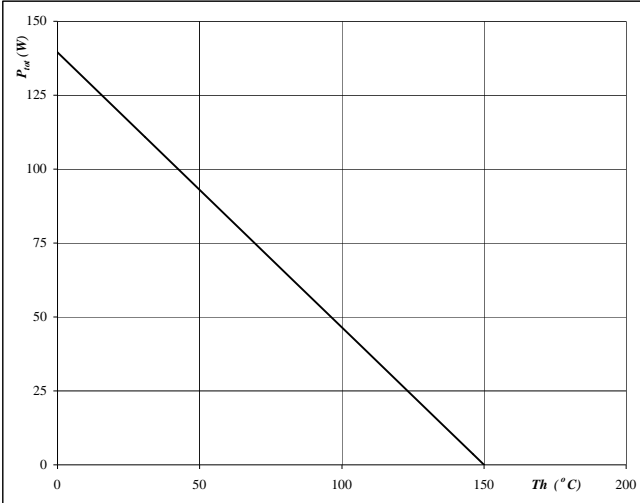
 At
 $T_j = 150 \text{ } ^\circ\text{C}$
Figure 12 Brake IGBT

Collector current as a function of heatsink temperature

$$I_C = f(T_h)$$

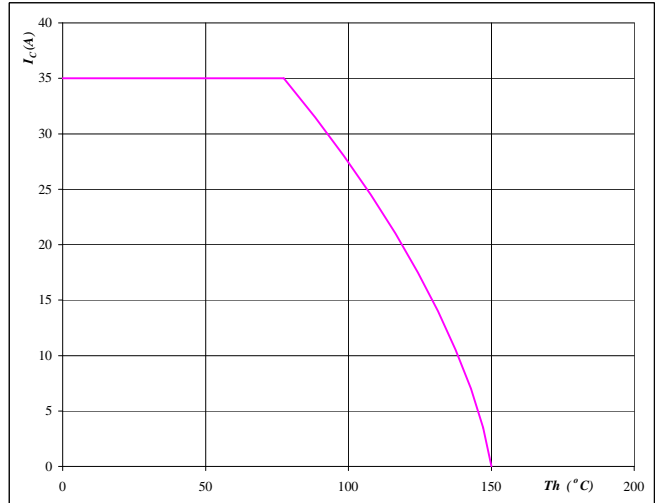
 At
 $T_j = 150 \text{ } ^\circ\text{C}$
 $V_{GE} = 15 \text{ V}$
Figure 13 Brake FRED


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$


 At
 $T_j = 150 \text{ } ^\circ\text{C}$
Figure 14 Brake FRED

Forward current as a function of heatsink temperature

$$I_F = f(T_h)$$

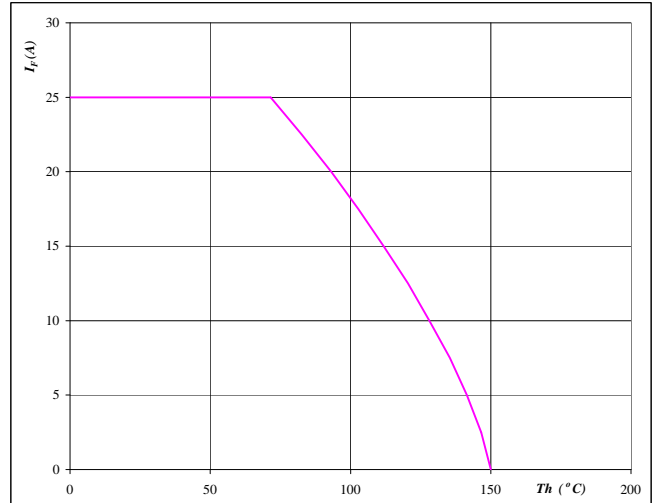

 At
 $T_j = 150 \text{ } ^\circ\text{C}$

Brake Inverse Diode

Figure 1 Brake inverse diode

Typical diode forward current as a function of forward voltage

$$I_F = f(V_F)$$

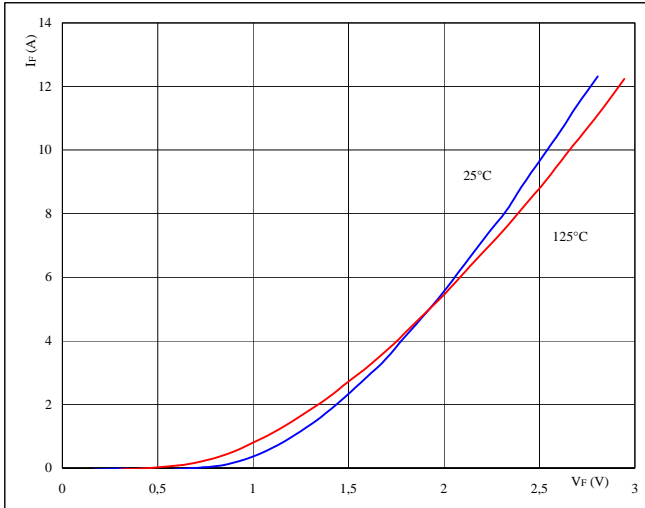


At
 $t_p = 250 \mu s$

Figure 2 Brake inverse diode

Diode transient thermal impedance as a function of pulse width

$$Z_{thJC} = f(t_p)$$

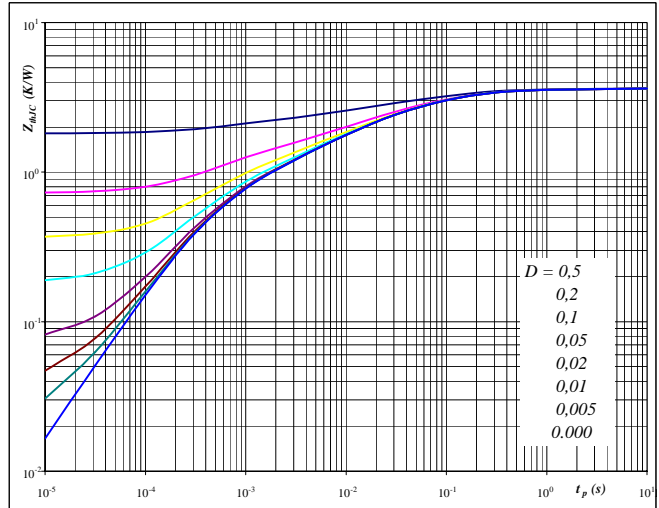


With
 $D = t_p / T$
 $R_{thJH} = 3,62 \text{ K/W}$

Figure 3 Brake inverse diode

Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$

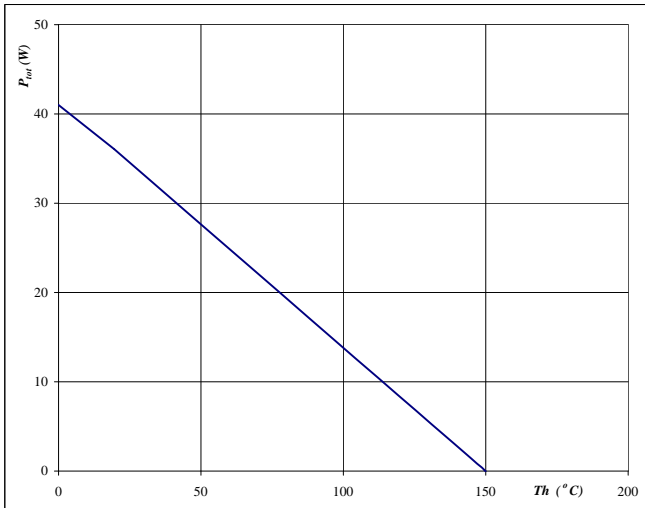


At
 $T_j = 150 \text{ }^\circ\text{C}$

Figure 4 Brake inverse diode

Forward current as a function of heatsink temperature

$$I_F = f(T_h)$$

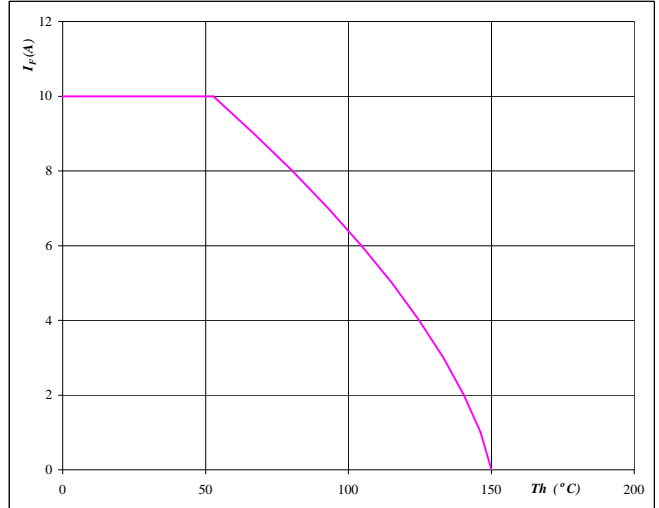


At
 $T_j = 150 \text{ }^\circ\text{C}$

Input Rectifier Bridge

Figure 1 Rectifier diode


Typical diode forward current as a function of forward voltage

$$I_F = f(V_F)$$

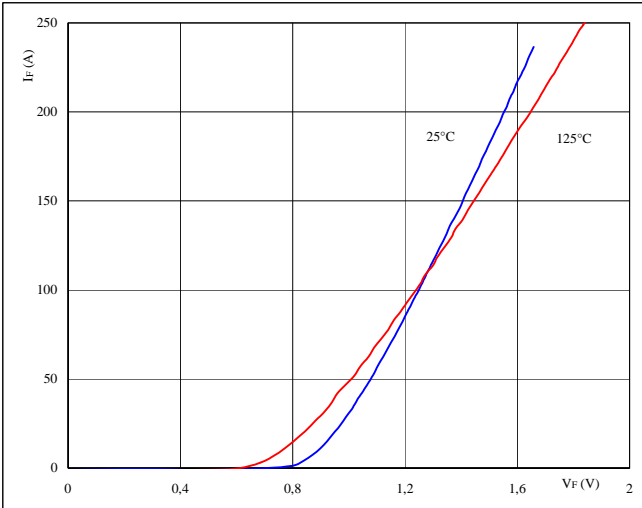
 At $t_p = 250 \mu s$
Figure 2 Rectifier diode


Diode transient thermal impedance as a function of pulse width

$$Z_{thJH} = f(t_p)$$

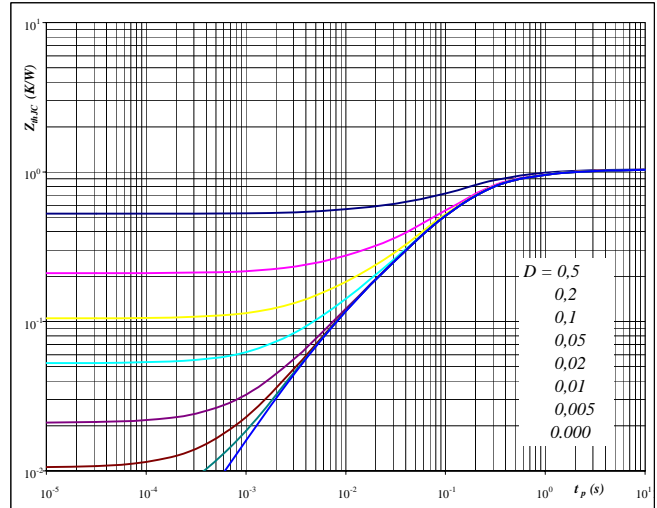
 With $D = t_p / T$
 $R_{thJH} = 1,04 \text{ K/W}$
Figure 3 Rectifier diode


Power dissipation as a function of heatsink temperature

$$P_{tot} = f(T_h)$$


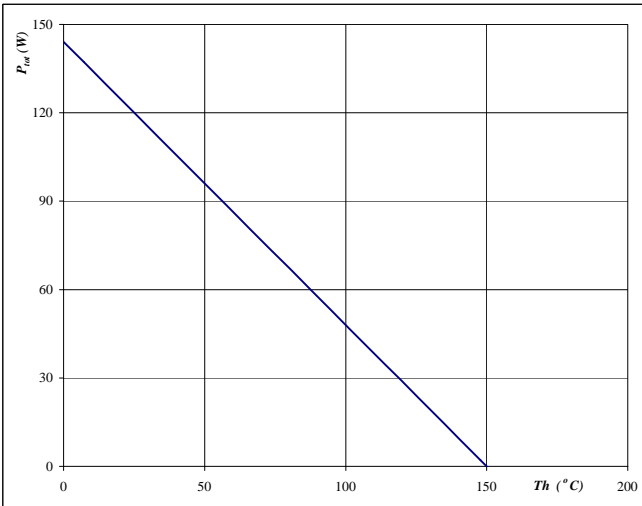

 At $T_j = 150 \text{ }^\circ\text{C}$
Figure 4 Rectifier diode

Forward current as a function of heatsink temperature

$$I_F = f(T_h)$$

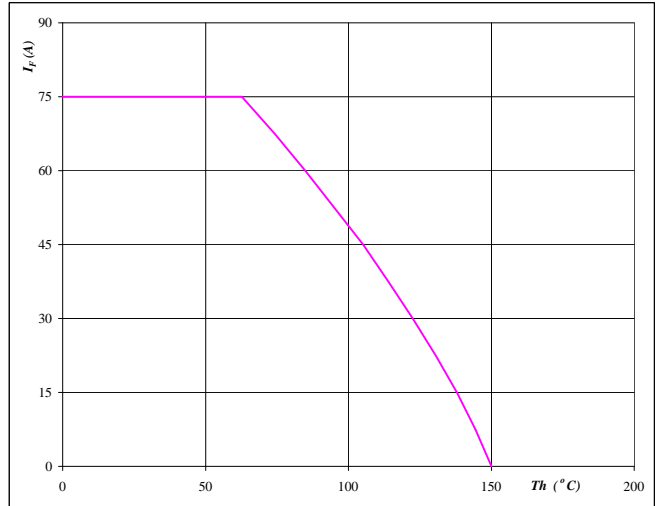
 At $T_j = 150 \text{ }^\circ\text{C}$

Package Outline and Pinout

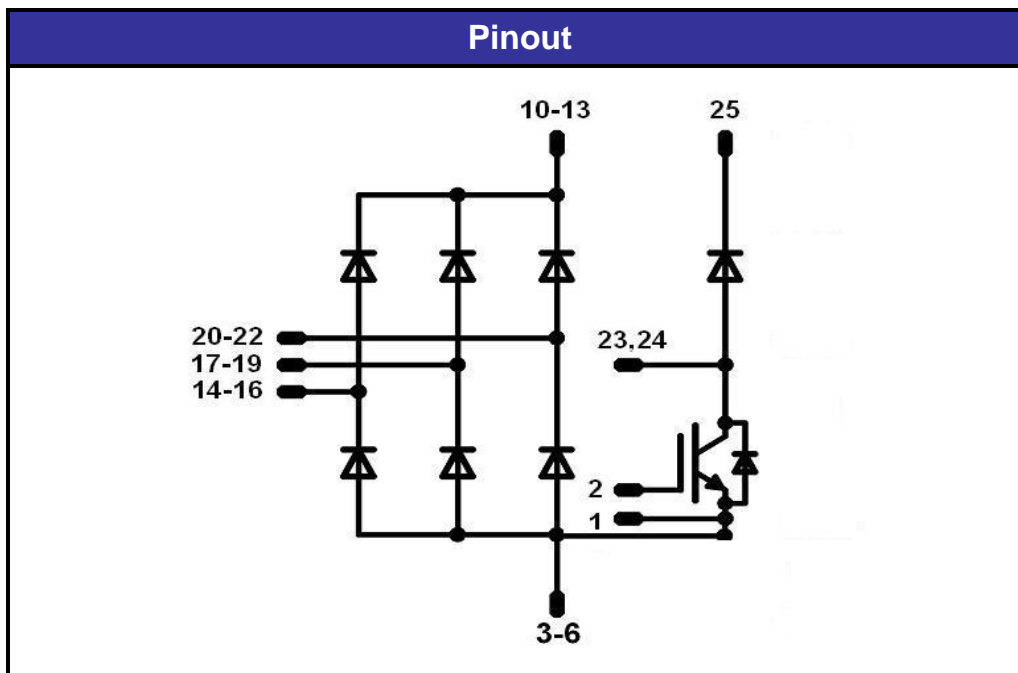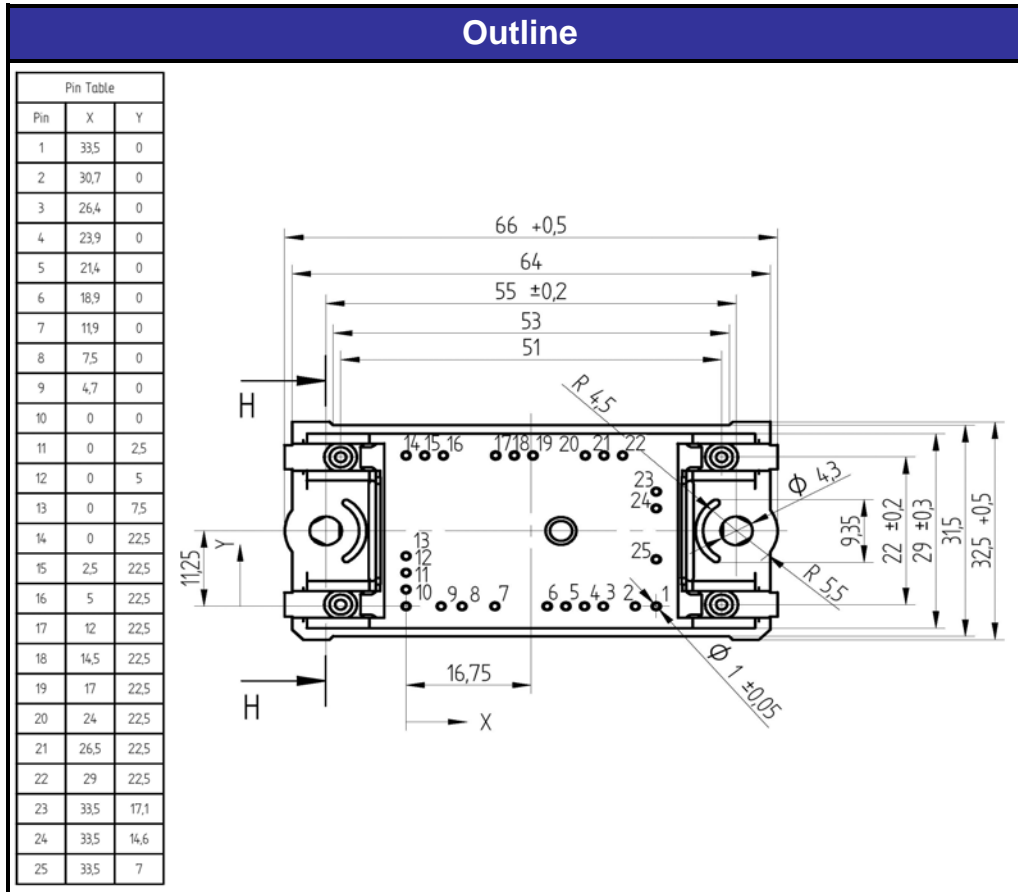

PRODUCT STATUS DEFINITIONS

Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data may be published at a later date. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.
Final	Full Production	This datasheet contains final specifications. Vincotech reserves the right to make changes at any time without notice in order to improve design. The data contained is exclusively intended for technically trained staff.

DISCLAIMER

The information given in this datasheet describes the type of component and does not represent assured characteristics. For tested values please contact Vincotech. Vincotech reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Vincotech does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.