

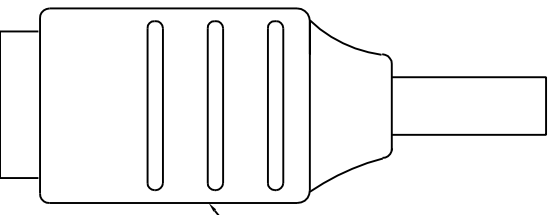
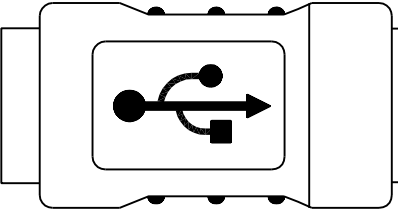



A B C D E F

DATE BY	REVISION



BEIGE



INSULATOR MATERIAL  
:PBT, UL 94V-0

CONTACT MATERIAL

:Brass, Gold Plated Over Nickel

SHELL FINISH

:Nickel Silver

OVERMOLD MATERIAL

:PVC

CURRENT RATING

:0.5mA

DIELECTRIC STRENGTH

:1000V AC for one minute

INSULATOR RESISTANCE

:1000M  $\Omega$  min at 500V DC

CONFIGURATION:

A Male B Female

- 1 \_\_\_\_\_ 1
- 2 \_\_\_\_\_ 2
- 3 \_\_\_\_\_ 3
- 4 \_\_\_\_\_ 4
- G \_\_\_\_\_ G

DATE	17 JAN,2003	PARTS NO	
UNIT	MM	DRAWN NO	A-USB-3
SCALE		BUYER NO	002

TITLE:  
ADAPTER  
USB A MALE-USB B FEMALE  
**A-USB-3**

DRAWN	Y.C.C 1/17	CHECK	APPRO
<b>ASSMANN ELECTRONICS.INC</b>			