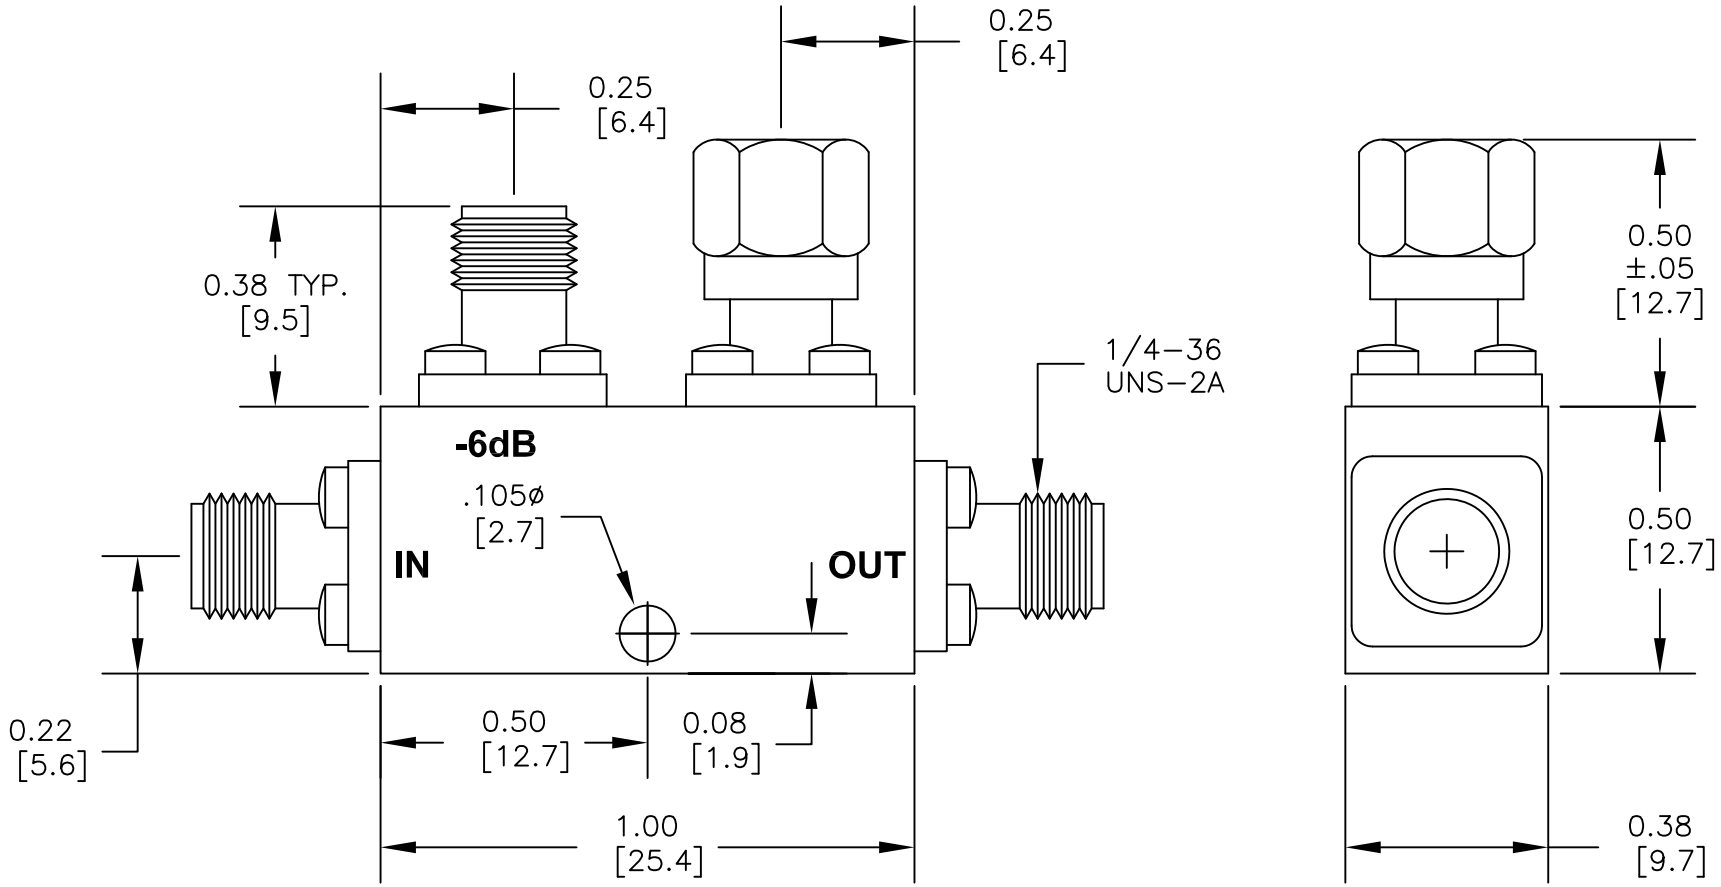


ENVIROMENTAL SPECIFICATIONS

FREQUENCY RANGE: 4.0-8.0 GHz
COUPLING (INCLUDES FREQUENCY SENSITIVITY): 6±1.00 dB
FREQUENCY SENSITIVITY: ±0.60 dB
INSERTION LOSS: (EXCLUDING COUPLED POWER) 0.25 dB (TRUE) 1.90 dB
DIRECTIVITY: 20 dB MINIMUM
PRIMARY LINE: 1.25 VSWR MAX.
SECONDARY LINE: 1.25 VSWR MAX.
AVG. INCIDENT: 50 WATTS POWER
AVG. REFLECTED: 2 WATTS POWER
PEAK: 3 KW POWER

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE	DES.
PE2204-6	SMA FEMALE DIRECTIONAL COUPLER, FREQUENCY RANGE: 4-8 GHz

REV. B	FSCM NO. 53919	CAD FILE 111811	SCALE N/A	SIZE A	2233

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].