
Machine Lights

BAE LX-XA-BW0530-S4
Order Code: BAE00Y4

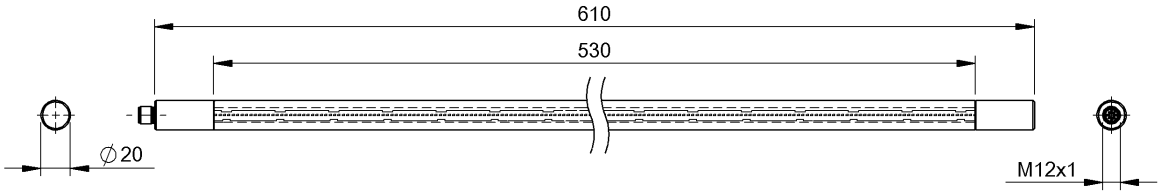

Basic features

Approval/Conformity	CE EAC cULus WEEE
Scope of delivery	Machine light Ø20 mm
Version	Machine light

Electrical connection

Connection	M12x1-Male, A-coded
Polarity reversal protected	yes

Electrical data

Current draw max.	746 mA
Protection class	III
Rated operating voltage Ue DC	24 V

Environmental conditions

Ambient temperature	-25...60 °C
IP rating	IP69K

Material

Material	Aluminum Anodized PMMA

Mechanical data

Dimension	Ø 20 x 610 mm

Optical features


Beam angle	120 °
Color temperature	4000 K
Illumination area	530 x 14 mm
LED group per IEC 62471	Risk group 1
Light intensity	1256 lm
Light type	LED white light

Remarks

For additional information, refer to user's guide.
Order accessories separately.
Install the device so that no direct view of the light source is possible even during operation.


BAE LX-XA-BW0530-S4
Order Code: BAE00Y4

Connector Drawings



PIN 1: +24V
PIN 2: n.c.
PIN 3: 0 V, DC
PIN 4: n.c.

Warning Symbols



LED light– DO NOT LOOK INTO THE BEAM!

Risk Group 1 per IEC 62471:2006-07