



SMD Power Inductor CDH50D48




**Halogen
Free**



Description

- Ferrite drum core construction
- Magnetically unshielded
- L × W × H: 5.15 × 5.9 × 5.0 mm Max.
- Product weight: 0.4g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.


Dimension - [mm]

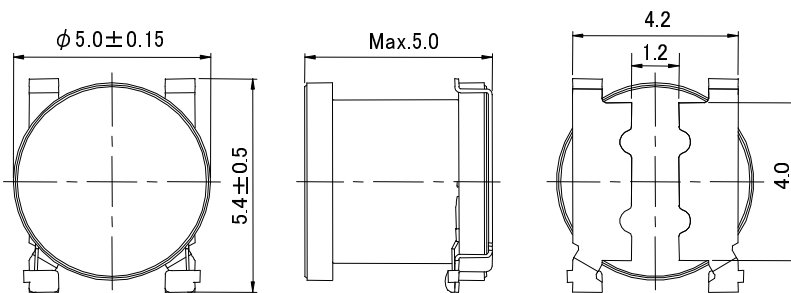

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.

Land pattern and Schematics - [mm]

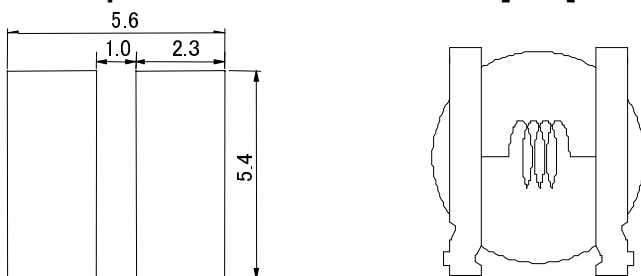

Packaging

- Carrier tape and reel packaging

Applications

- input filter of LED lighting.

Electrical Characteristics

Sumida P/N	Inductance (μ H) at 100kHz	D.C.R. (Ω) at 20°C ※1	Saturation Current (mA) ※2		Temperature Rise Current (mA) ※3
			(at 20°C)	(at 105°C)	
CDH50D48NP-101KC	100 ± 10%	0.54(0.43)	600	480	650
CDH50D48NP-151KC	150 ± 10%	0.88(0.70)	490	400	500
CDH50D48NP-221KC	220 ± 10%	1.13(0.90)	410	330	450
CDH50D48NP-331KC	330 ± 10%	1.88(1.57)	330	270	330
CDH50D48NP-471KC	470 ± 10%	2.59(2.16)	275	225	270
CDH50D48NP-681KC	680 ± 10%	3.84(3.20)	240	190	230
CDH50D48NP-102KC	1000 ± 10%	6.72(5.60)	190	150	165
CDH50D48NP-152KC	1500 ± 10%	10.6(8.82)	155	120	135
CDH50D48NP-222KC	2200 ± 10%	16.0(13.3)	130	100	105
CDH50D48NP-332KC	3300 ± 10%	26.6(22.2)	105	80	80
CDH50D48NP-472KC	4700 ± 10%	33.8(28.2)	90	65	75

※1. () are typical value.

※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDH50D48



Saturation Current & Temperature Rise Graph



— L (20°C) — L (105°C) — ΔT

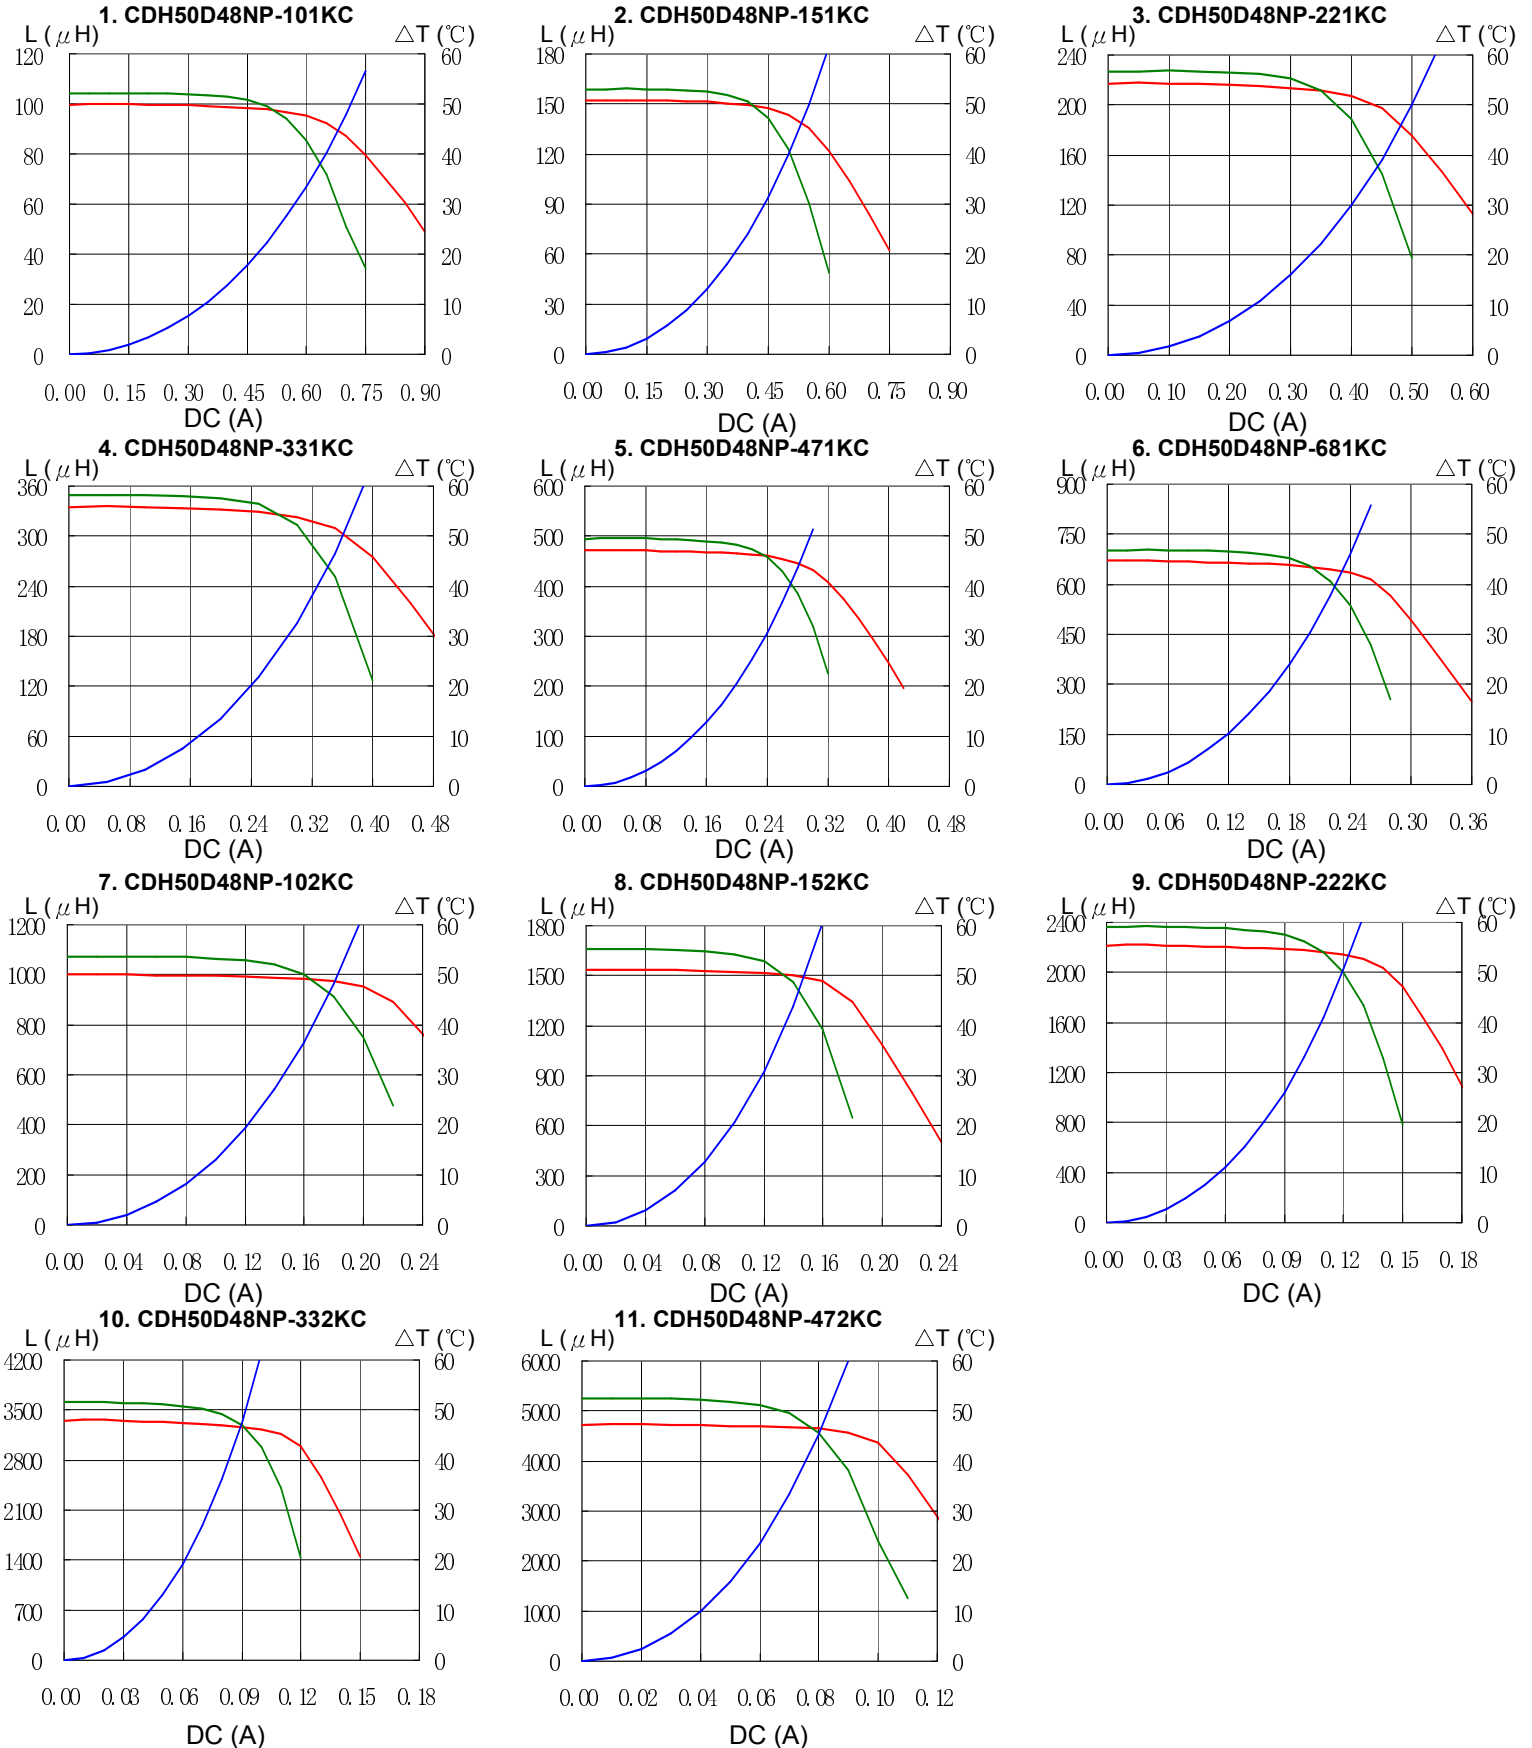

SMD Power Inductor CDH50D48



Solder Reflow Condition

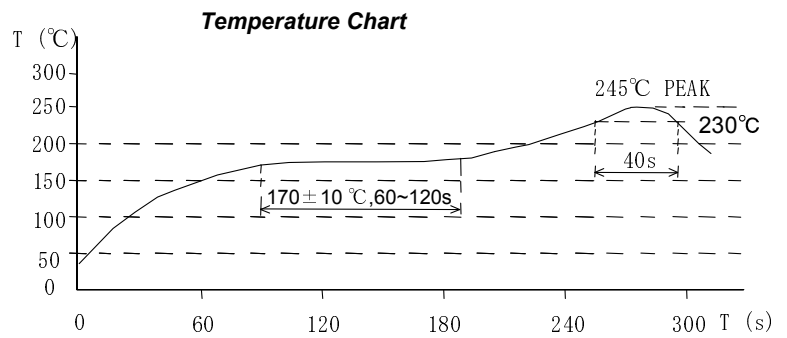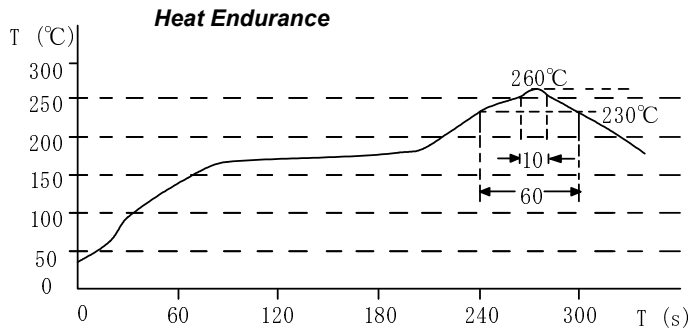

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6688

FAX.+852-2565-9600

sales@hk.sumida.com

Tokyo

Tel.+81-3-5202-7112

FAX.+81-3-5202-7105

sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700

FAX. +1-847-545-6720

sales@us.sumida.com

Shanghai

Tel.+86-021-5836-3299

FAX.+86-021-5836-3266

shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777

FAX.+82-2-6237-0778

sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0

FAX. +49-8591-937-103

contact@sumida-eu.com

Shenzhen

Tel.+86-755-8291-0228

FAX.+86-755-8291-0338

shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388

FAX.+65-6296-3390

sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110

FAX. +49-9181-4509-310

infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737

FAX.+886-2-8751-2738

sales@tw.sumida.com

San Jose

Tel.+1-408-3219660

FAX.+1-408-321-9308

sales@us.sumida.com