


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
F		FIX FONTS ISSUE	MAY11/12	L.CHAN
G		FIX REV ERROR	NOV13/12	L.CHAN
H		ADD GENERAL TOLERANCE	APR01/13	L.CHAN

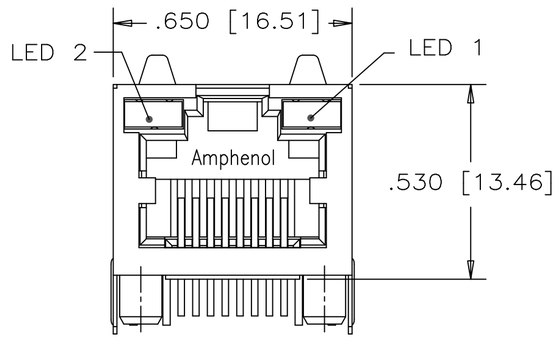

FRONT VIEW

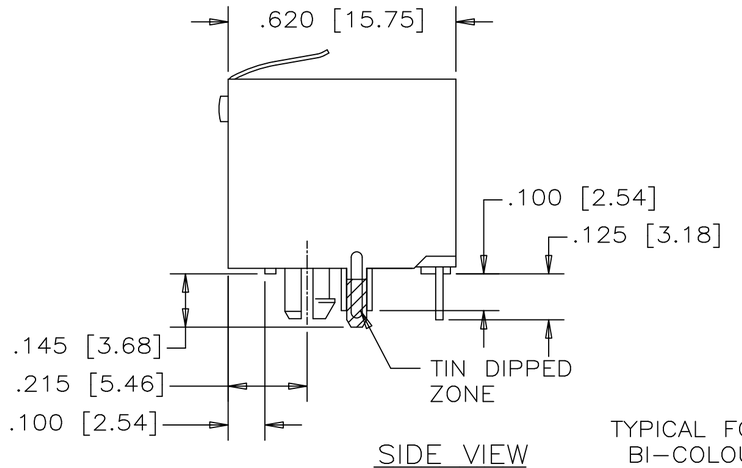


SIDE VIEW

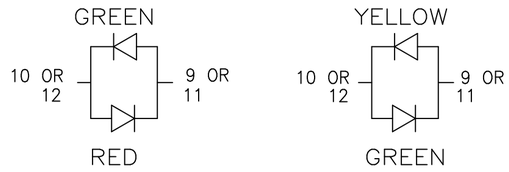

BI–COLOUR LED DETAIL

(RED/YELLOW AND GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

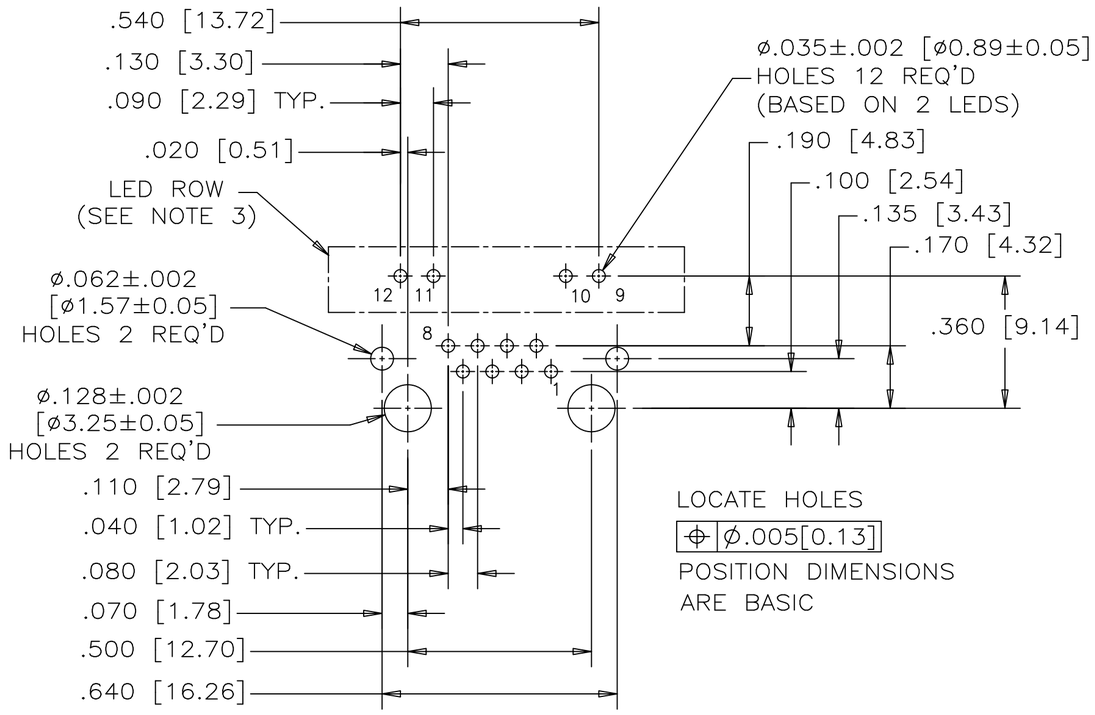


LOCATE HOLES

⌖ | ø.005[0.13]


POSITION DIMENSIONS ARE BASIC

RECOMMENDED P.C.B. LAYOUT

(COMPONENT SIDE OF BOARD)

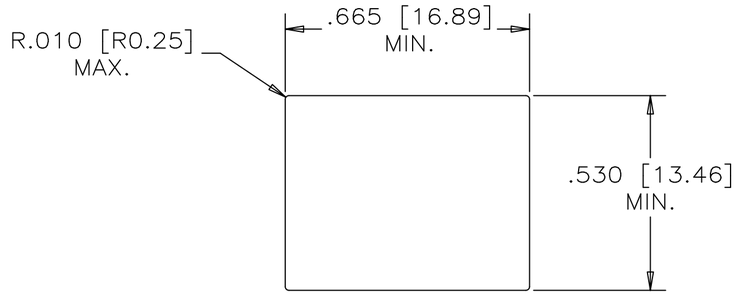

RECOMMENDED PANEL CUTOUT

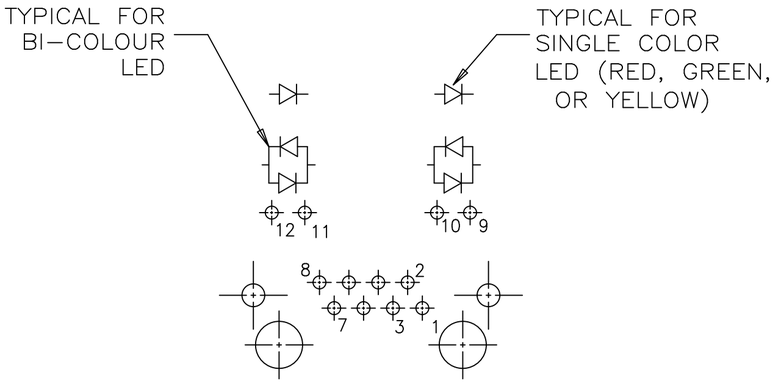

LED SCHEMATIC

NOTES:

1. MATERIALS:
   PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
   FLAMMABILITY RATING UL 94V–0, COLOUR: BLACK

   CONTACTS: PHOSPHOR BRONZE
   PLATING: 50 µ" [1.27 MICRONS] MIN. GOLD ON MATING SURFACES.
   50 µ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE
   100 µ" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

   SHIELD: STAINLESS STEEL WITH TIN DIP ON SOLDER TAIL

2. RECOMMENDED SOLDERING TEMPERATURE:
   WAVE SOLDERING AT 260°C MAXIMUM FOR 5 SEC MAXIMUM.

3. P.C.B HOLE LAYOUT:
   AMPHENOL PART NUMBER RJHSE–538X P.C.B LAYOUT LED HOLES ARE OPTIONAL.

4. PART NUMBER: RJHSE–538X
   └ REFER TO LED OPTIONS DRAWING FOR ORDERING CODES

AMPHENOL CANADA CORP RoHS COMPLIANT 2011/65/EU RECAST

GENERAL TOLERANCE:

DECIMALs		ANGLEs	
.X	±.025	X°	±3.0°
.XX	±.020	.X°	±2.0°
.XXX	±.015	.XX°	±1.0°

DRAWN	PAULW	APR13/06
DESIGNED		
CHECKED	CHIGOW	APR13/06
I. E. APPRD.		
Q. A. APPRD.		
DWG. APPRD.		
ENG. REL. NO.		
REF.		

DIMENSIONS ARE IN INCHES [mm] | CODE ID. NO. 03554

Amphenol Canada Corp.


TITLE
HIGH SPEED, RJ45, MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED, WITH LEDs – RoHS COMPLIANT

DWG	DRAWING NO.	REV.
	P–RJHSE–538X	H

SCALE | WT. ------ | SURF. ----- | SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	SEP21/04	
B		ADD LED CODE N	AUG16/12	L.C

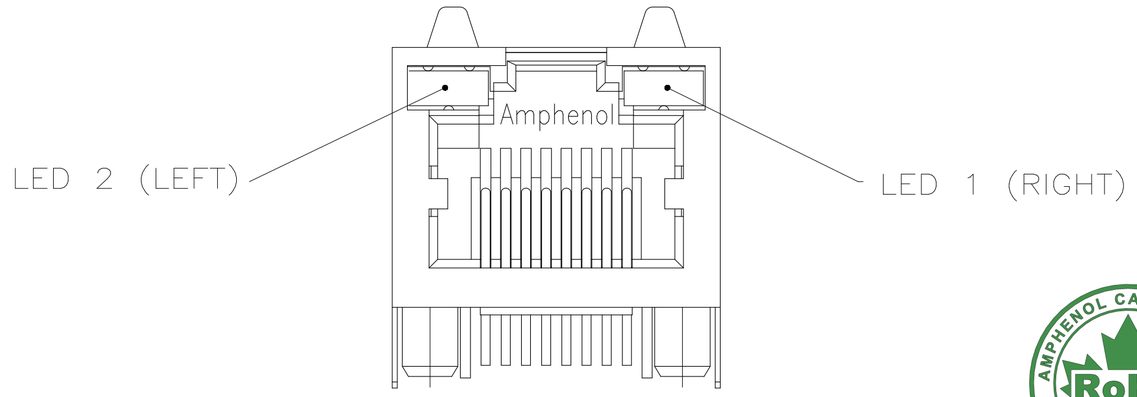

TYPICAL FOR SINGLE & MULTI-PORT

AMPHENOL CANADA CORP RoHS COMPLIANT 2011/65/EU RECAST

LED SPECIFICATIONS:

FORWARD VOLTAGE: 2.1 VOLTS TYP.
REVERSE VOLTAGE: 5.0 VOLTS MIN.
LUMINOUS INTENSITY: 0.5 mCd MIN.
(AT If=2mA)
STORAGE TEMPERATURE: −20° TO 85° C
LEAD SOLDERING TEMPERATURE: 260° C
(5 SEC, 1/16" FROM CASE)
PLATING ON TAILS: TIN OR TIN/COPPER ALLOY OVER SILVER

EXAMPLE:

PART NUMBER RJHSE−538X

LED COLOR CODE

+ − (ANODE)+ −(CATHODE)

PRIMARY COLOR FOR BI−COLOR LEDS IN STANDARD ANODE/CATHODE CONFIGURATION IS:
RED−GREEN= RED
RED−YELLOW= RED
GREEN−YELLOW= GREEN
GREEN−ORANGE= GREEN

CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)
0	BLOCKED	BLOCKED	9	GREEN	BLOCKED	J	BiC RD/GR	YELLOW
1	YELLOW	GREEN	A	BiC GR/YE	BiC GR/YE	K	YELLOW	BiC GR/OR
2	BLOCKED	GREEN	B	BiC RD/GR	BiC RD/GR	L	BiC GR/YE	RED
3	YELLOW	BLOCKED	C	BiC RD/GR	BiC GR/YE	M	RED	YELLOW
4	GREEN	YELLOW	D	GREEN	BiC GR/YE	N	BiC GR/RD	BiC GR/YE
5	GREEN	GREEN	E	YELLOW	BiC GR/YE	P	GREEN	BiC RD/GR
6	YELLOW	YELLOW	F	BiC GR/YE	YELLOW	R	BiC GR/OR	GREEN
7	RED	GREEN	G	BiC GR/OR	BiC GR/OR	T	RED	RED
8	GREEN	RED	H	BiC GR/YE	GREEN	V	BiC RD/GR	GREEN
						W	ADDITIONAL	OPTIONS

LEGEND
BiC=BI−COLOR LED
LOWC=LOW CURRENT LED
YE=YELLOW
GR=GREEN
RD=RED
OR=ORANGE

EXAMPLE OF ADDITIONAL LED OPTIONS:

PART NUMBER RJHSE−538W−01Y

ADDITIONAL LED COLOR CODE

DENOTES ADDITIONAL LED OPTIONS TO BE USED

CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)	CODE	LED 2 (LEFT)	LED 1 (RIGHT)
0	DO NOT USE		5	BLOCKED	YELLOW	E	BIC GR/YE	BIC GR/RD
1	RED	BLOCKED	6	RED	BiC RD/GR	A	LOWC YE	LOWC YE
2	BiC GR/OR	YELLOW	7	BLOCKED	BiC RD/GR	B	LOWC YE	LOWC GR
3	YELLOW	RED	8	BiC RD/GR	BLOCKED	C	LOWC GR	LOWC YE
4	BLOCKED	RED	9	BiC GR/YE	BLOCKED	D	LOWC GR	LOWC GR
						M	LOWC RD	LOWC YE

NOTE:
THE TWO DIGITS PRECEDING THE ADDITIONAL LED CODE MUST BE USED IN THE PART NUMBER, WHEN ORDERING ANY OF THE ADDITIONAL LED OPTIONS.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN K. LAMBIE	DATE SEP21/04	Amphenol Canada Corp.
DESIGNED		TITLE: LED OPTIONS FOR RJHSE, SINGLE OR MULTI−PORT CONNECTORS − RoHS COMPLIANT
CHECKED		
I. E. APPRD.		
Q. A. APPRD.		
DWG. APPRD.		
ENG. REL. NO.		DWG DRAWING NO. P−RJHSE−LEDS REV. B
REF.		
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	SCALE ——— WT. ——— SURF. ——— SHEET 1 OF 1