
| COMPONENTS | IMPEDANCE |
|---|---|
| BNC MALE | 50 OHM |
| BNC FEMALE BULKHEAD | 50 OHM |
| RG8A/U | 52 OHM |
| | |

| Standard Lengths | |
|---|---|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in Inches |
| | |

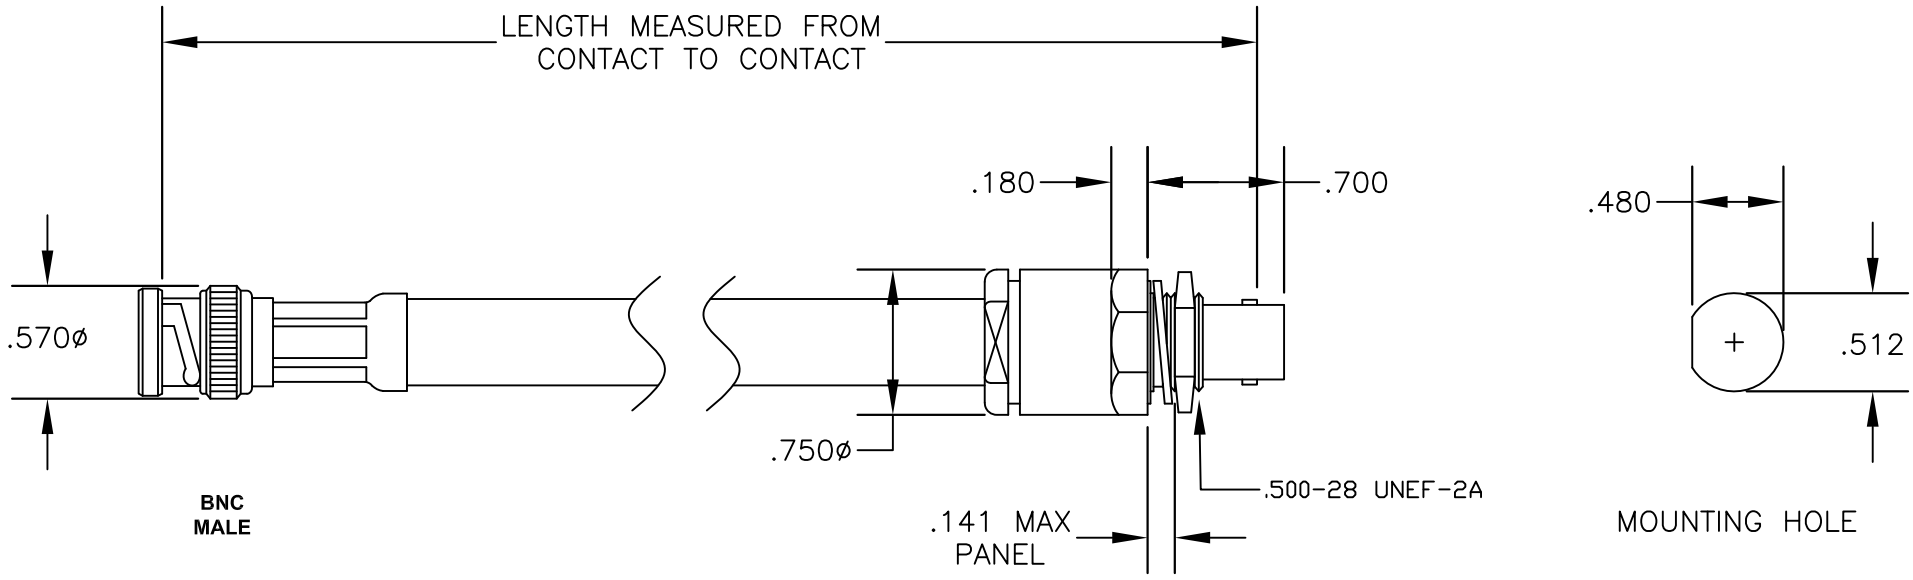


BNC
MALE

BNC
FEMALE BULKHEAD

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

DWG TITLE
**PE3440-XX**

DES. CABLE ASSEMBLY, RG8A/U, BNC MALE TO BNC FEMALE BULKHEAD

| REV. A | FSCM NO. 53919 | CAD FILE 042110 | SCALE N/A | SIZE A | 147 |
|---|---|---|---|---|---|

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.