


A  
B  
C  
D  
E  
F

G  
H

A  
B  
C  
D  
E  
F

G  
H

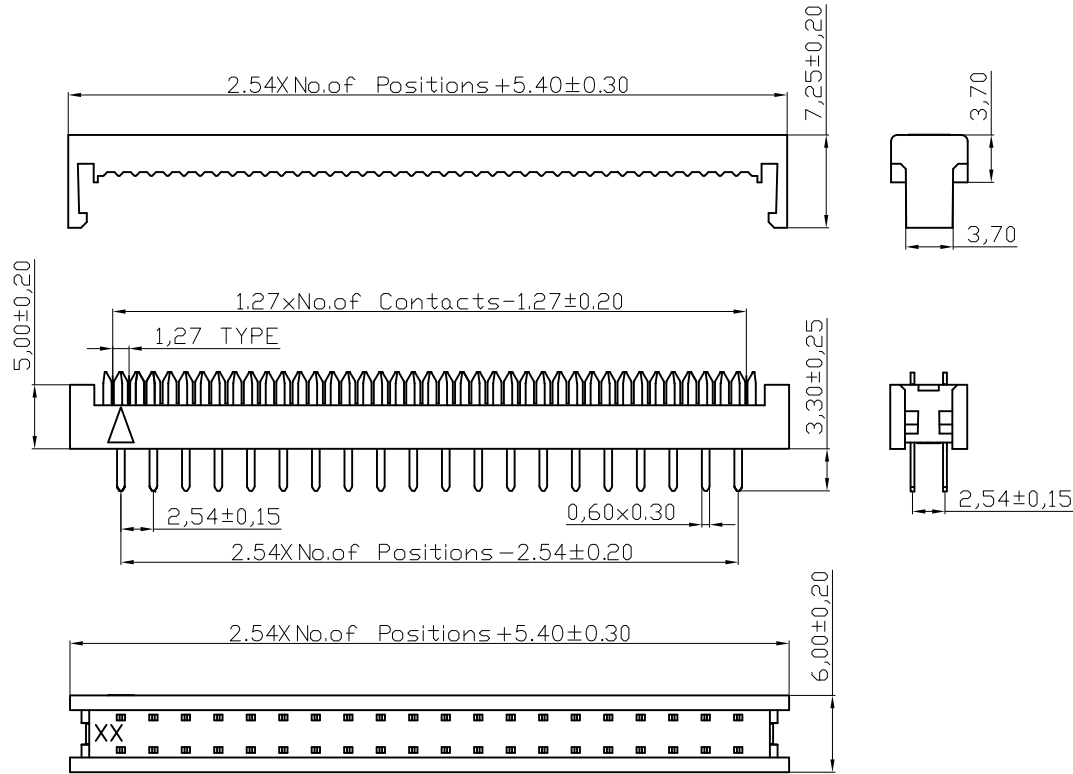

**NOTES:**

**MATERIAL**

- 1. Insulator Material: PBT+30%GF(UL94V-0), Grey
- 2. Contact Material : Brass
- 3. Contact Plating : Sn Over 50μ" Ni

**ELECTRICAL**

- 1. Current Rating : 3.0AMP
- 2. Withstand Voltage : 1000V AC/DC
- 4. Contact Resistance : 20mΩ max
- 5. Insulation Resistance: 1000MΩ min

**ENVIRONMENTAL**

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing : Tray

⑤

Order Information:  
contacts xx : 06,08,10,12,14,16,18,20,22,24,26  
28,30,32,34,36,38,40,50,60,64

**RoHS compliant**  
Unit: mm



Scale	Free	⑥	Add UL file no.	12.12.2013	Amy		Date	Name	Customer-No.
TOLERANCE		⑤	Add multiple pin	17.09.2013	Winnie	Drawn	31.07.2006	Hellwig	ASSMANN WSW-No. <b>AWLP xx/3.2-T</b>
X.X	±0.40	④	Add 18pin product	06.09.2013	Ray	Approved	12.12.2013	Amy	
X.XX	±0.25	③	Update	16.03.2009	Dean				
X.XXX	±0.15	②	Redraw	09.03.2009	Dean				Drawing-No.
Angle	±3°	①	Drawn	31.07.2006	Hellwig				<b>ASS 1197 CO</b> rev06
			Id.	Modification	Date	Name			Replace dd 15.11.01 Sheet

