ROHS

技术说明：此产品防水等级：IP-X7.

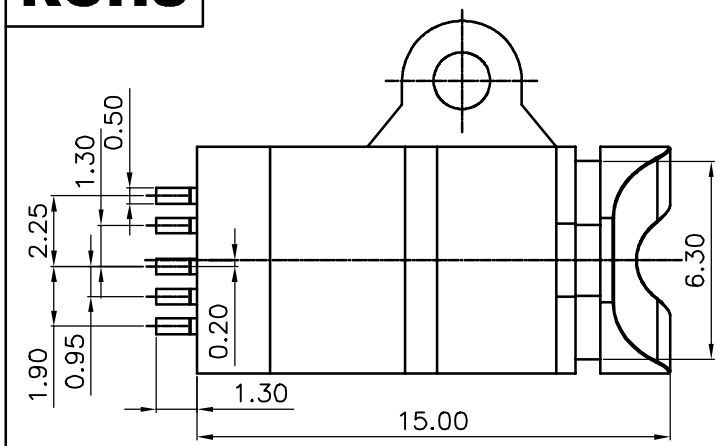

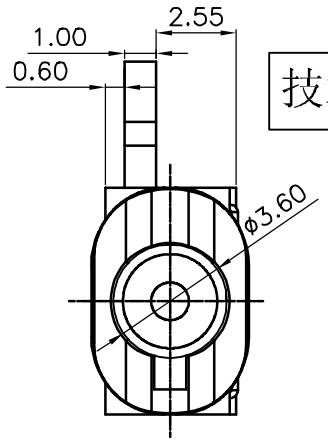

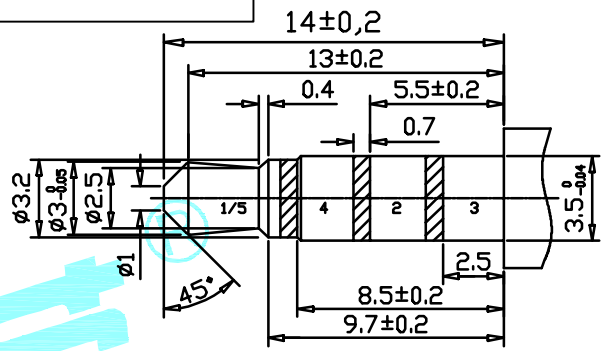

MATE PLUG

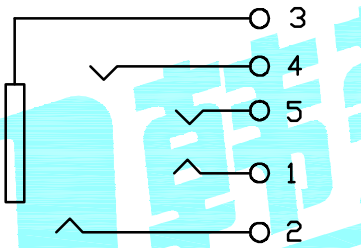

CIRCUIT DIAGRAM

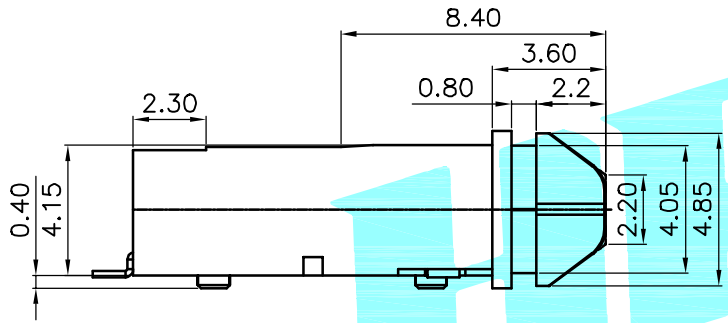

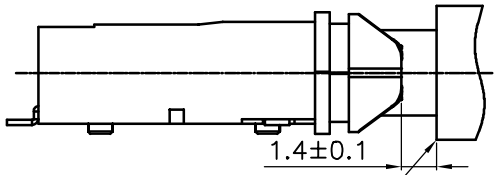

完全插入插头后，插座前端与插头根部间距尺寸

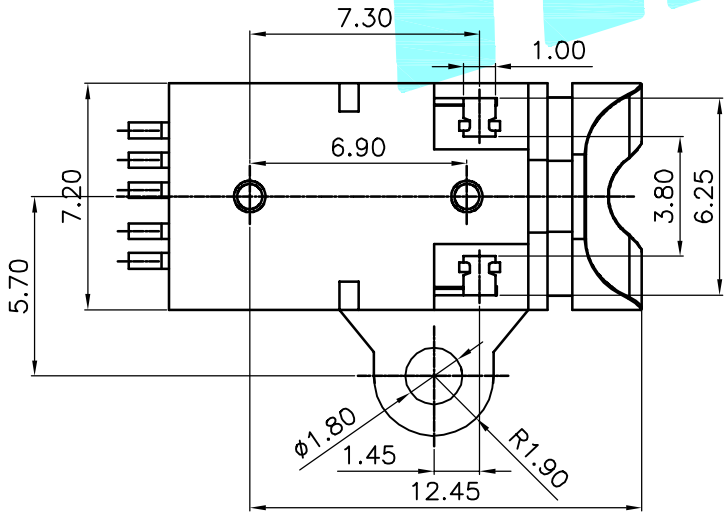

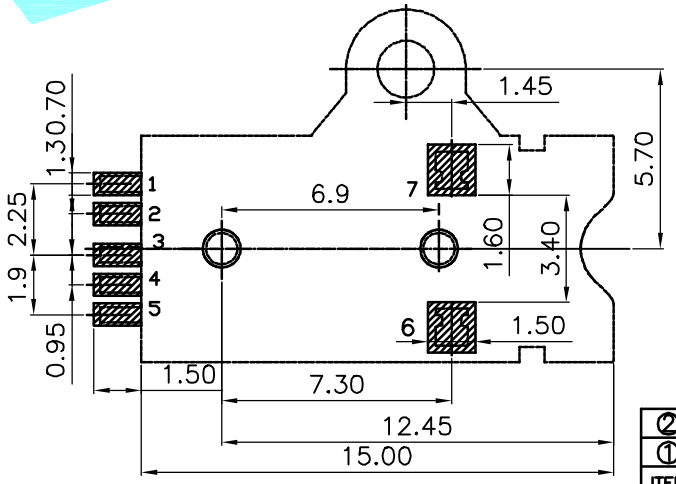

P.C.B LAYOUT

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:−20℃~70℃
Operating force:3−20N
Operating Life:5,000cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	——	5	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——

APPROVALS		DATE	
DRAWN	xu qi feng	2014.12.06	HRO韩荣® ELECTRONICS CO.,LTD
CHECKED			TITLE: PHONE JACKES
APPROVALS			PART NO. PJ−601

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ.
	30~以上	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO. ——		SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——