

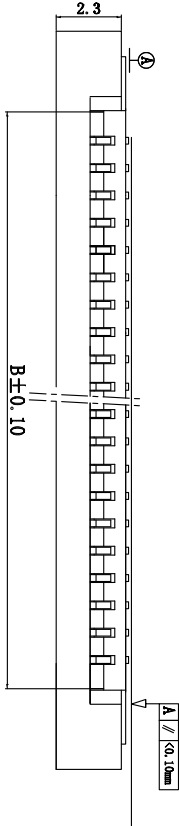



| 标记 | 版次  | 变 更 内 容              | 日 期        |
|----|-----|----------------------|------------|
|    | A 版 | 新版图面                 | 2011-01-13 |
| △  | B 版 | 设计变更，焊片2.45修改为1.75mm | 2017-10-06 |


材料 Material  
接触件 (Contact) : 磷青铜t=0.25mm 镀亮锡  
Phosphor Bronze Tin-plated  
焊片 (solder tab): 磷青铜 t=0.20mm镀亮锡  
Phosphor Bronze Tin-plated  
塑胶主体 (Housing) : LCP耐热树脂  
(UL94V-0) Heat resistance plastic (UL94V-0)  
锁条 (Slider) : PPS耐热树脂  
(UL94V-0) Heat resistance plastic (UL94V-0)

技术参数 SPECIFICATIONS  
间距 (Pitch) : 1.0  
极数 (Poles) :3~40  
额定电压 (Voltage rating):50V  
额定电流 (Current rating) :0.5A  
耐压值 (Withstand Voltage) :500V  
工作温度 (Working Temperature) :-25℃~+85℃  
绝缘电阻 (Insulation Resistance) :≥500MΩ  
接触电阻 (Contact resistance) :≤30mΩ

| 孔位 | A     | B     | C     | 孔位 | A     | B     | C     |
|----|-------|-------|-------|----|-------|-------|-------|
| 3  | 10.00 | 4.10  | 2.00  | 22 | 29.00 | 23.10 | 21.00 |
| 4  | 11.00 | 5.10  | 3.00  | 23 | 30.00 | 24.10 | 22.00 |
| 5  | 12.00 | 6.10  | 4.00  | 24 | 31.00 | 25.10 | 23.00 |
| 6  | 13.00 | 7.10  | 5.00  | 25 | 32.00 | 26.10 | 24.00 |
| 7  | 14.00 | 8.10  | 6.00  | 26 | 33.00 | 27.10 | 25.00 |
| 8  | 15.00 | 9.10  | 7.00  | 27 | 34.00 | 28.10 | 26.00 |
| 9  | 16.00 | 10.10 | 8.00  | 28 | 35.00 | 29.10 | 27.00 |
| 10 | 17.00 | 11.10 | 9.00  | 29 | 36.00 | 30.10 | 28.00 |
| 11 | 18.00 | 12.10 | 10.00 | 30 | 37.00 | 31.10 | 29.00 |
| 12 | 19.00 | 13.10 | 11.00 | 31 | 38.00 | 32.10 | 30.00 |
| 13 | 20.00 | 14.10 | 12.00 | 32 | 39.00 | 33.10 | 31.00 |
| 14 | 21.00 | 15.10 | 13.00 | 33 | 40.00 | 34.10 | 32.00 |
| 15 | 22.00 | 16.10 | 14.00 | 34 | 41.00 | 35.10 | 33.00 |
| 16 | 23.00 | 17.10 | 15.00 | 35 | 42.00 | 36.10 | 34.00 |
| 17 | 24.00 | 18.10 | 16.00 | 36 | 43.00 | 37.10 | 35.00 |
| 18 | 25.00 | 19.10 | 17.00 | 37 | 44.00 | 38.10 | 36.00 |
| 19 | 26.00 | 20.10 | 18.00 | 38 | 45.00 | 39.10 | 37.00 |
| 20 | 27.00 | 21.10 | 19.00 | 39 | 46.00 | 40.10 | 38.00 |
| 21 | 28.00 | 22.10 | 20.00 | 40 | 47.00 | 41.10 | 39.00 |

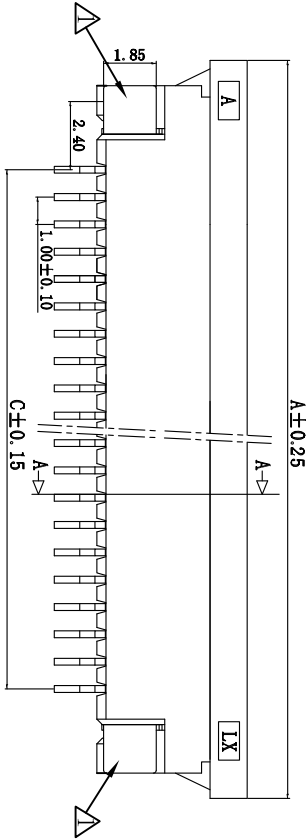

适用电缆 (proper cable) (δ=0.3mm)

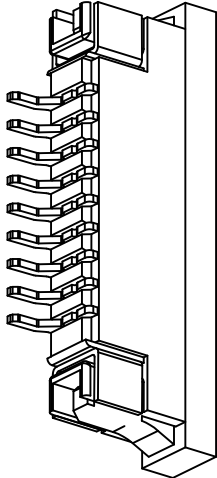

### TOLERANCE TABLE

|      | ±0.30 |
|------|-------|
| .0   | ±0.30 |
| .00  | ±0.20 |
| .000 | ±0.05 |

|           |       |                                                    |
|-----------|-------|----------------------------------------------------|
| APPROVED: | DATE: | 深圳市灿科盟实业有限公司<br>Ckmtw CHANKLEMENT INDUSTRYCO., LTD |
| CHECKED:  | DATE: |                                                    |
| DRAWN:    | DATE: |                                                    |

|          |            |           |    |          |                |      |   |      |
|----------|------------|-----------|----|----------|----------------|------|---|------|
| luli-liu | 2017-10-06 | PROD. P/N | /  | SCALE    | free           | REV. | A | LX00 |
|          |            | UNIT      | mm | FILE NO. | Ckmtw-FPC-0086 |      |   |      |

TITLE: FPC1.0-XP 下接 抽拉式