

NOTES:

MATERIAL :

- 1 HOUSING MATERIAL
- 2 CONTACT MATERIAL
- 3 PLATING
- 4 GLASS FILLED POLYESTER UL94V-0.
- 5 PHOSPHOR BRONZE Ø0.46mm
- 6 GOLD PLATING OVER NICKEL.

ELECTRICAL:



- 1 VOLTAGE RATING : 25 VAC RMS
- 2 CURRENT RATING : 15 AMP.
- 3 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4 INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC.
- 5 DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz 1MIN.

MECHANICAL:

- 1 DURABILITY : 750 CYCLES MIN.
- 2 PCB RETENTION PRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1 STORAGE : -40°~+85°
- 2 OPERATION : 0° TO 70°

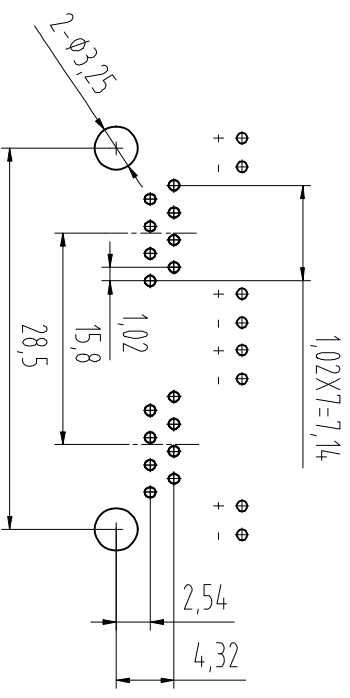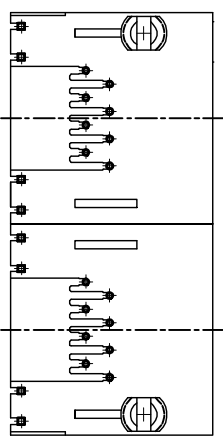

PC Board Layout
Component Side Shown

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	TITLE:
CHECKED:	DATE:	RJ45-8P/8C 双磁胎 1*2 弯插 短体 全搜 带灯
DRAWN:	DATE:	P/N
SXA	2018-10-28	5JA-1X2-8P8C-LED
		UNIT
		mm
		SCALE
		free
		REV.
		A
		HT04

深圳市如科盟实业有限公司
Kamt CHANKLEMENT INDUSTRY CO., LTD