


MHO+ Series

14 pin DIP, 5.0 Volt, HCMOS/TTL, Clock Oscillator



Features:

- Standard 14 DIP Package
- RoHS Compliant Version Available (-R)
- Tristate Option
- Wide Operating Temperature Range

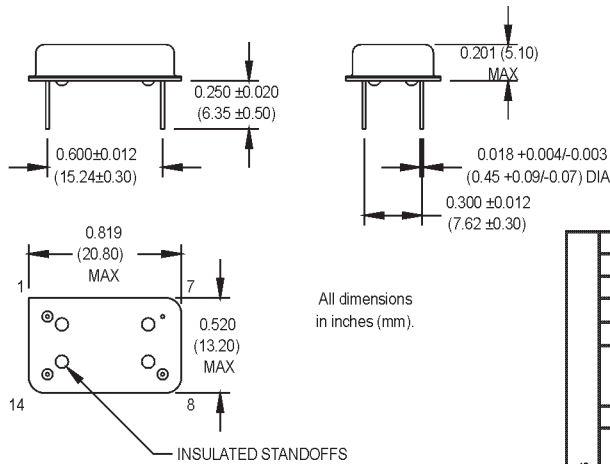

Pin Connections

PIN	FUNCTION
1	N/C or Tristate
7	Circuit/Case Ground
8	Output
14	+Vdd

Available Symmetry

FREQUENCY RANGE	STD.	OPTIONS
0.732 kHz to 50 MHz	A	B, C, D
50.001 to 60 MHz	A	B, C
60.001 to 67 MHz	A	C
67.001 to 80 MHz	F,G	C

Ordering Information

Product Series	MHO+	1	3	F	A	D	-R	00.0000 MHz
Temperature Range		1: 0°C to +70°C	2: -40°C to +85°C	3: -55°C to +105°C	4: -55°C to +125°C	5: -10°C to +85°C	6: -20°C to +70°C	7: 0°C to +85°C
Stability		1: ±1000 ppm	2: ±500 ppm	3: ±100 ppm	4: ±50 ppm	5: ±35 ppm	6: ±25 ppm	7: ±0/-200 ppm
Output Type		F: Fixed	T: Tristate (1.000 to 80.000 MHz)					
Symmetry/Logic Compatibility (See Table Below)		A: 40/60 HCMOS/TTL	B: 45/55 TTL	C: 45/55 HCMOS	D: 45/55 HCMOS/TTL	F: 40/60 TTL	G: 40/60 HCMOS	
Package/Lead Configurations		D: DIP; Nickel Header	G: Gull Wing; Nickel Header					
RoHS Compliance		Blank: non-RoHS compliant part	-R: RoHS compliant part					
Frequency (customer specified)								

*Contact factory for availability
M2014Sxxx - Contact factory for datasheet.

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	.732 kHz		80	MHz	See Note 1
Operating Temperature	T _A	(See ordering information)				
Storage Temperature	T _S	-55		+125	°C	
Frequency Stability	ΔF/F	(See ordering information)				
Aging						
1st Year			±3		ppm	
Thereafter (per year)			±2		ppm	
Input Voltage	V _{dd}	4.5	5.0	5.5	V	
Input Current	I _{dd}			15 25 60	mA mA mA	.732 kHz to 2.999 MHz 3.000 to 25.999 MHz 26.000 to 80.000 MHz
Output Type						HCMOS/TTL
Load						See Note 2 5 TTL or 50 pF 10 TTL or 50 pF 10 TTL or 15 pF
Symmetry (Duty Cycle)						See Note 3
Logic "1" Level	V _{oh}	90% V _{dd} V _{dd} -0.5			V V	HCMOS Load TTL Load
Logic "0" Level	V _{ol}			10% V _{dd} 0.5	V V	HCMOS Load TTL Load
Output Current				±8 ±16	mA mA	.732 kHz to 2.999 MHz 3.000 to 80.000 MHz
Rise/Fall Time	T _r /T _f			20 10	ns ns	See Note 4 .732 kHz to 2.999 MHz 3.000 to 25.999 MHz
Tristate Function		Input Logic "1": or floating; output active Input Logic "0": output to high-Z				
Start up Time				10	ms	
Random Jitter	R _j		5	12	ps RMS	1-Sigma
Mechanical Shock		MIL-STD-202, Method 213, C (100 g's)				
Vibration		MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)				
Thermal Cycle		MIL-STD-883, Method 1010, B (-55°C to +125°C, 15 min dwell, 10 cycles)				
Hermeticity		MIL-STD-202, Method 112				
Solderability		Per EIAJ-STD-002				
Max Wave Soldering Conditions		+260°C for 10 seconds				

1. Contact the factory for availability of higher frequencies.
2. TTL load - see Load Circuit Diagram #1. HCMOS load - see Load Circuit Diagram #2.
3. Symmetry is measured at 1.4 V with TTL load and at 50% V_{dd} with HCMOS load.
4. Rise/fall times are measured between 0.4 V and 2.4 V with TTL load, and between 10% V_{dd} and 90% V_{dd} with HCMOS Load.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

Revision: 8-13-07