

# T1/CEPT/ISDN PRI Interface Transformer

## Electrical Specifications @ 25°C

Turns Ratio ( ± 5% )	1:1.15CT & 1:2CT
----------------------	------------------

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.5 & 0.8	μH
Capacitance (C <sub>ww</sub> )		50	pF
Primary DC Resistance		0.8	Ohms
Secondary DC Resistance		1.8	Ohms
ET Product	10		VμS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Parts shipped in anti-static tubes. 33 pieces per tube

*Tape & Reel Available*


**Primary Pins 14-16 & 6-8**

**Isolation 2000 V<sub>RMS</sub> Min.**

## PHYSICAL DIMENSIONS inches (mm)

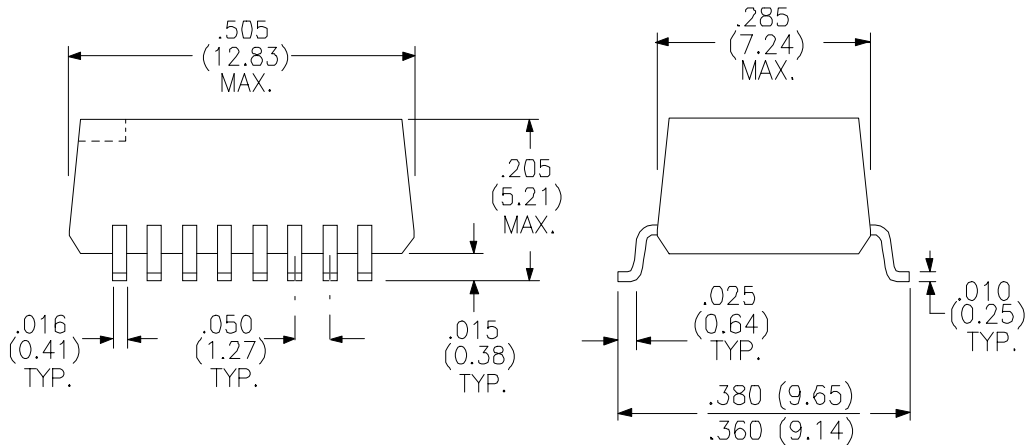

## Schematic Diagram

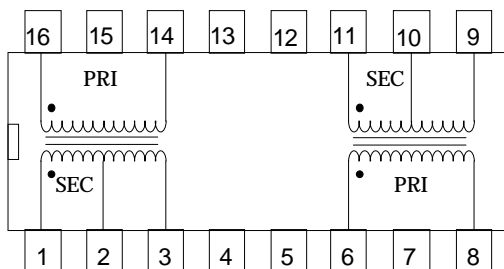

Rhombus P/N: **T-14103**

Cust. P/N:

Name:

Date: **10/13/95**

Sheet: 1 of 1