
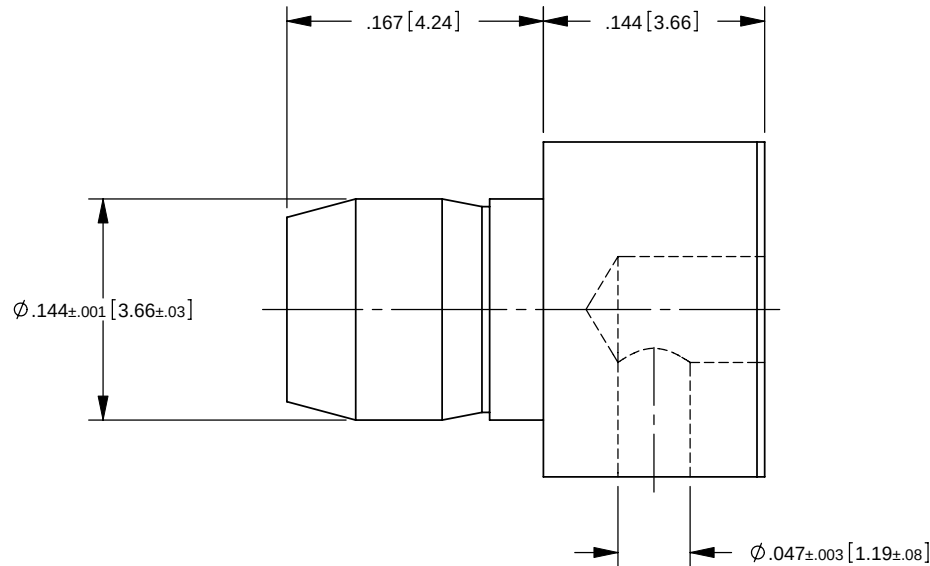
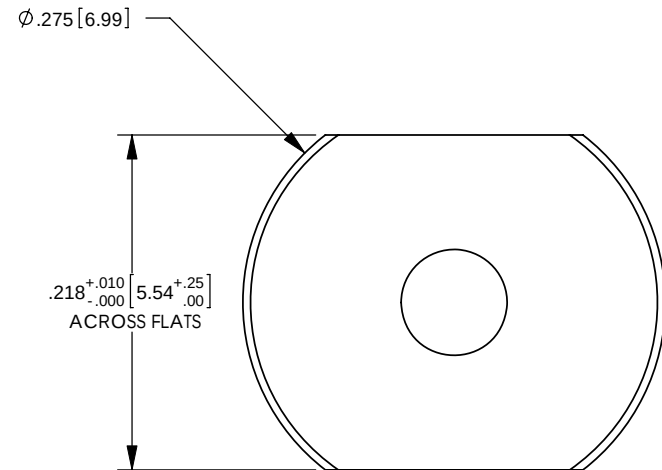


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD74-0000.
2. MATERIAL SPECIFICATIONS: BRASS PER ASTM B16.
3. FINISH SPECIFICATIONS:
.000030 MIN. GOLD PER ASTM B488 OVER .000050 MIN. NICKEL PER AMS QQ-N-290.
4. ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 8 AMPS
5. FOR USE WITH 20 GA WIRE OR EQUIVALENT.
6. REFER TO CAP10-01 FOR CABLE ASSEMBLY PROCEDURE.

REV	DESCRIPTION	BY DATE	APPD
B	REVISED PER ER7306	CWB 04/11/08	CWB

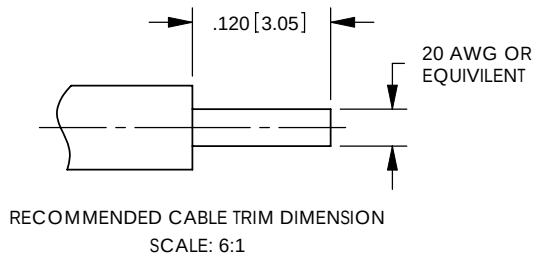

CATALOG P/N: 01447G

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX ± .01 [0.3] .XXX ± .005 [0.13] .XXXX ± .XXXX ANGLES: ± 2° SCALE: 8:1				 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER DRAWING				POWERSNAP, RIGHT ANGLE SOLDER MOUNT 20 AW, 8 AMP			
DRAWN PSM	DATE 06/18/07	APPROVED WPM	DATE 06/18/07	A SD01447G SHT 1 OF 1 REV B			
APPROVED XXX	DATE XX/XX/XX	APPROVED JC	DATE 06/18/07				