P-Ch 30V Fast Switching MOSFETs

General Description

The UD3015 is the highest performance trench P-ch MOSFETs with extreme high cell density , which provide excellent RDSON and gate charge for most of the synchronous buck converter applications .

The UD3015 meet the RoHS and Green Product requirement , 100% EAS guaranteed with full function reliability approved.

Product Summery

BVDSS	RDSON	ID
-30V	10.5mΩ	-57A


Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

TO252 Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating		Units
		10s	Steady State	
V_{DS}	Drain-Source Voltage	-30		V
V_{GS}	Gate-Source Voltage	±20		V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ -10V[1]	-57		A
I_D@T_C=100℃	Continuous Drain Current, V_{GS} @ -10V[1]	-36		A
I_D@T_A=25℃	Continuous Drain Current, V_{GS} @ -10V[1]	-17.8	-11.3	A
I_D@T_A=70℃	Continuous Drain Current, V_{GS} @ -10V[1]	-14.2	-9	A
I_{DM}	Pulsed Drain Current[2]	-180		A
EAS	Single Pulse Avalanche Energy[3]	408		mJ
I_{AS}	Avalanche Current	-55.4		A
P_D@T_C=25℃	Total Power Dissipation[4]	52.1		W
P_D@T_A=25℃	Total Power Dissipation[4]	5	2	W
T_{STG}	Storage Temperature Range	-55 to 150		℃
T_J	Operating Junction Temperature Range	-55 to 150		℃

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1]	---	62	℃/W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient [1] (t ≤10s)	---	25	℃/W
$R_{\theta JC}$	Thermal Resistance Junction-Case[1]	---	2.4	℃/W

Electrical Characteristics (T_J=25 ℃, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V , I_D=-250uA	-30	---	---	V
$\triangle BV_{DSS}/\triangle T_J$	BV_{DSS} Temperature Coefficient	Reference to 25℃ , I_D=-1mA	---	-0.018	---	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=-10V , I_D=-30A	---	8	10.5	mΩ
		V_{GS}=-4.5V , I_D=-15A	---	14	18.5	
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS}=V_{DS} , I_D =-250uA	-1.0	-1.6	-2.5	V
$\triangle V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	5.04	---	mV/℃
I_{DSS}	Drain-Source Leakage Current	V_{DS}=-24V , V_{GS}=0V , T_J=25℃	---	---	1	uA
		V_{DS}=-24V , V_{GS}=0V , T_J=55℃	---	---	5	
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V , V_{DS}=0V	---	---	±100	nA
gfs	Forward Transconductance	V_{DS}=-5V , I_D=-30A	---	26.4	---	S
Q_g	Total Gate Charge (-4.5V)	V_{DS}=-15V , V_{GS}=-4.5V , I_D=-15A	---	33	---	nC
Q_{gs}	Gate-Source Charge		---	10.7	---	
Q_{gd}	Gate-Drain Charge		---	12.8	---	
$T_{d(on)}$	Turn-On Delay Time	V_{DD}=-15V , V_{GS}=-10V , R_G=3.3Ω, I_D=-15A	---	8	---	ns
T_r	Rise Time		---	17.8	---	
$T_{d(off)}$	Turn-Off Delay Time		---	78.4	---	
T_f	Fall Time		---	43.6	---	
C_{iss}	Input Capacitance	V_{DS}=-15V , V_{GS}=0V , f=1MHz	---	3448	---	pF
C_{oss}	Output Capacitance		---	508	---	
C_{rss}	Reverse Transfer Capacitance		---	421	---	

Guaranteed Avalanche Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy[5]	V_{DD}=-25V , L=0.1mH , I_{AS}=-30A	120	---	---	mJ

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current[1,6]	V_G=V_D=0V , Force Current	---	---	-57	A
I_{SM}	Pulsed Source Current[2,6]		---	---	-180	A
V_{SD}	Diode Forward Voltage[2]	V_{GS}=0V , I_S=-1A , T_J=25℃	---	---	-1.2	V
t_{rr}	Reverse Recovery Time	IF=-15A , dI/dt=100A/μs , T_J=25℃	---	29	---	nS
Q_{rr}	Reverse Recovery Charge		---	15	---	nC

Note :
1.The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper.
2.The data tested by pulsed , pulse width ≦ 300us , duty cycle ≦ 2%
3.The EAS data shows Max. rating . The test condition is V_{DD}=-25V,V_{GS}=-10V,L=0.1mH,I_{AS}=-55.4A
4.The power dissipation is limited by 150℃ junction temperature
5.The Min. value is 100% EAS tested guarantee.
6.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

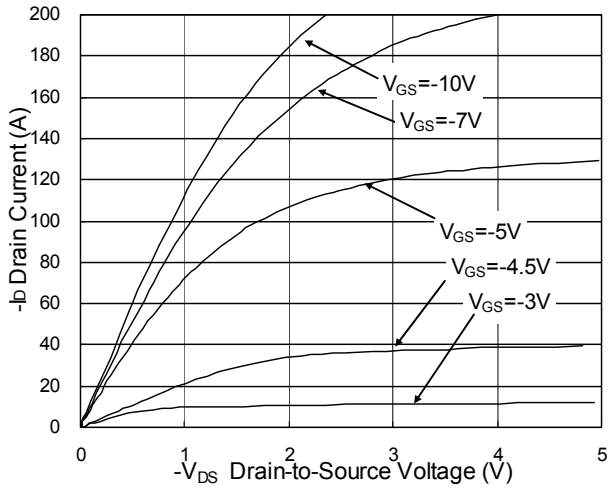


Fig.1 Typical Output Characteristics

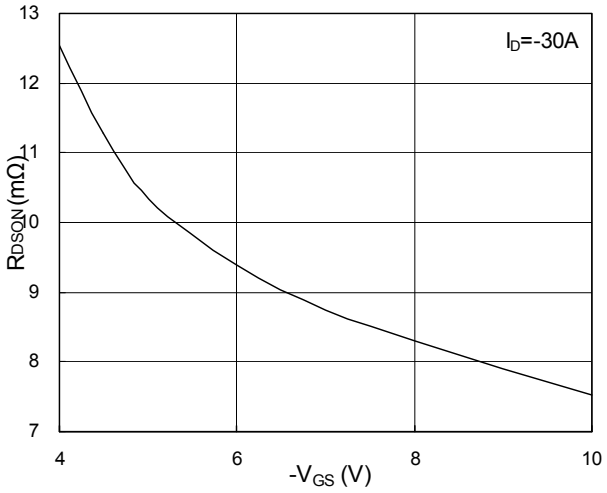


Fig.2 On-Resistance v.s Gate-Source

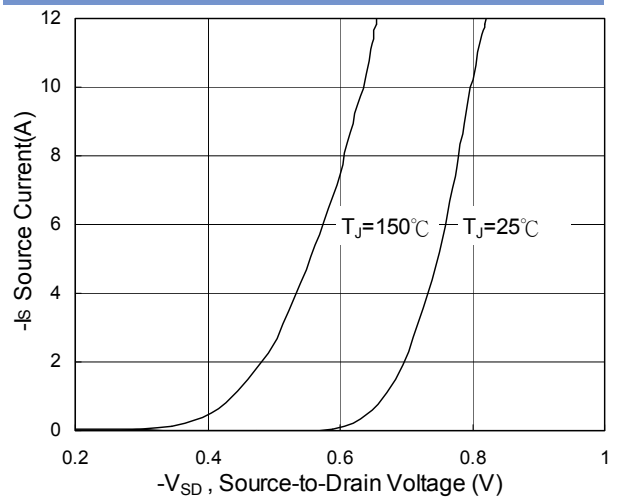


Fig.3 Forward Characteristics Of Reverse

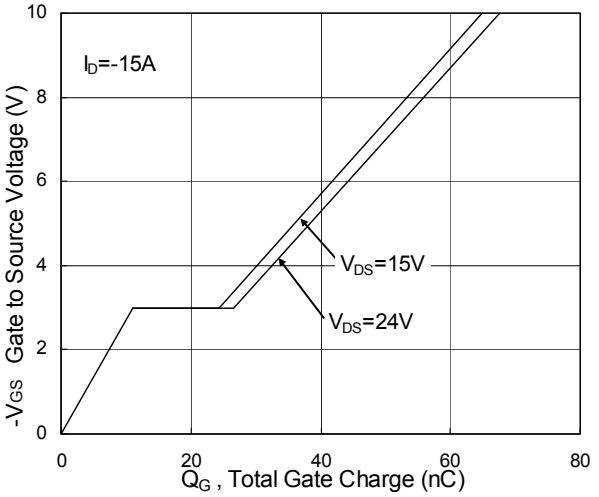


Fig.4 Gate-Charge Characteristics

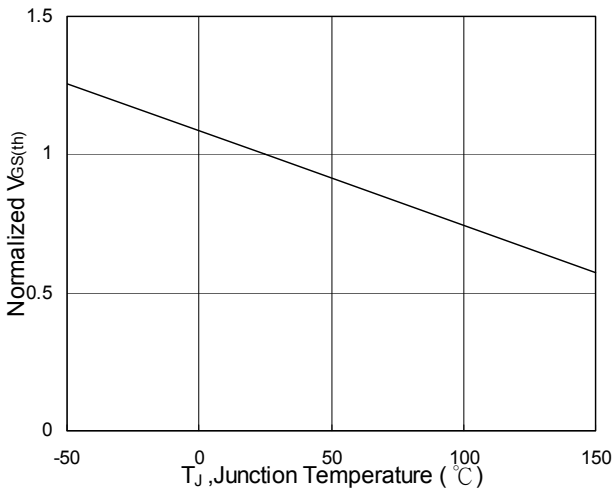


Fig.5 Normalized $V_{GS(th)}$ v.s T_J

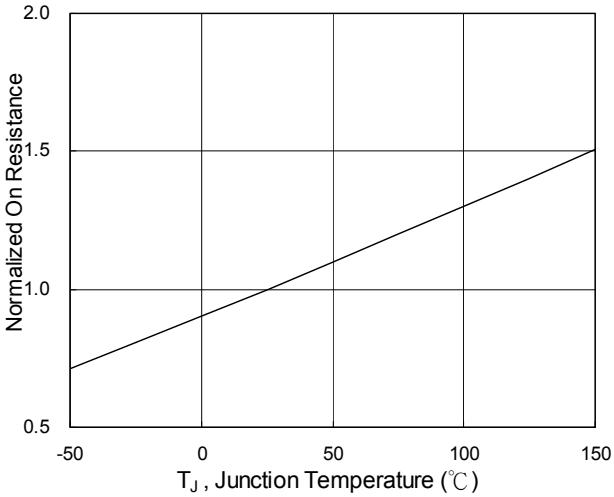


Fig.6 Normalized R_{DSON} v.s T_J

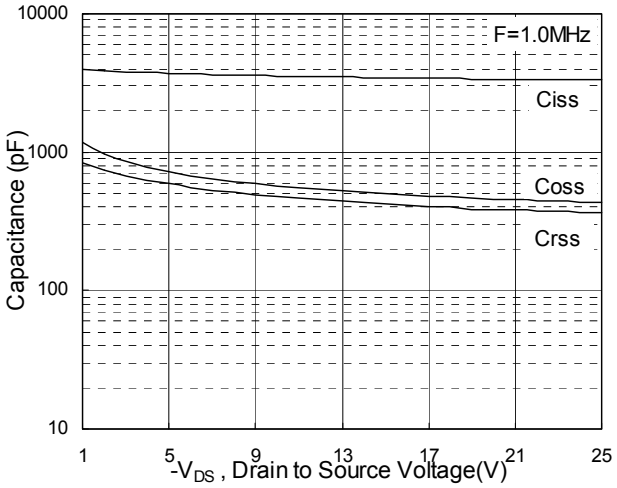


Fig.7 Capacitance

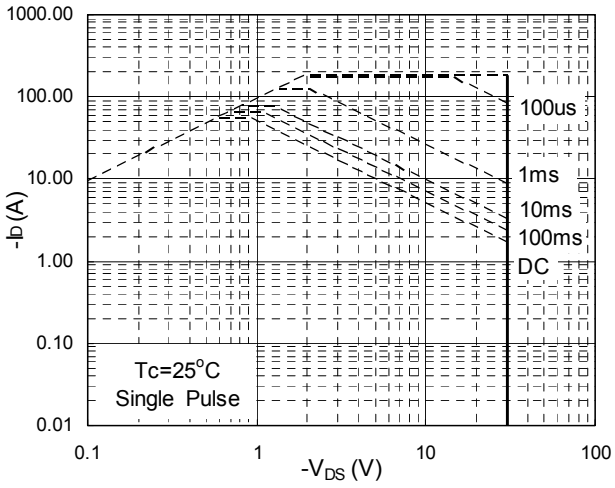


Fig.8 Safe Operating Area

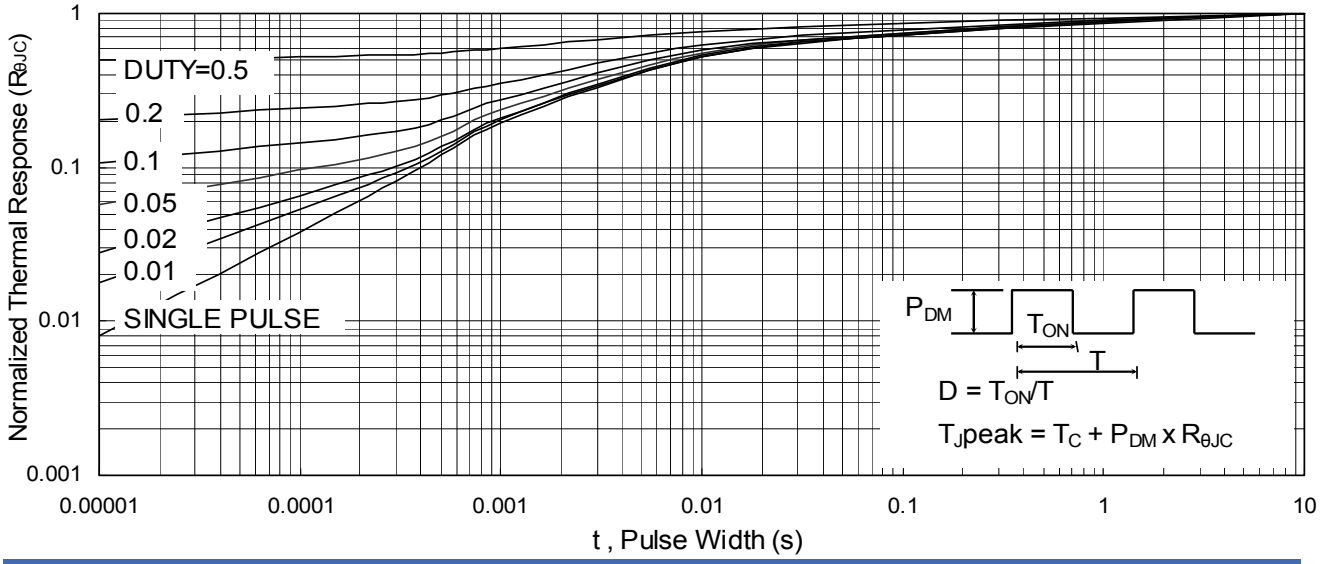


Fig.9 Normalized Maximum Transient Thermal Impedance

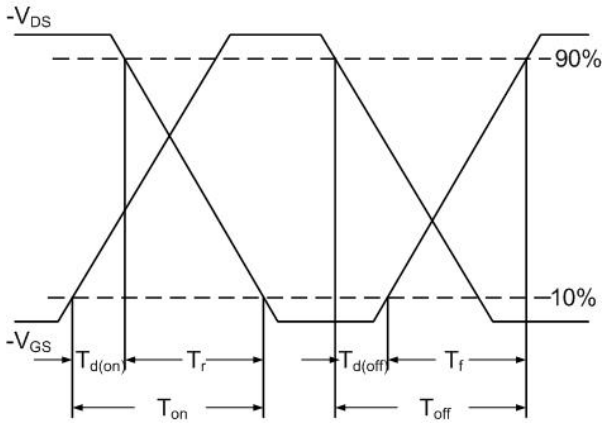


Fig.10 Switching Time Waveform

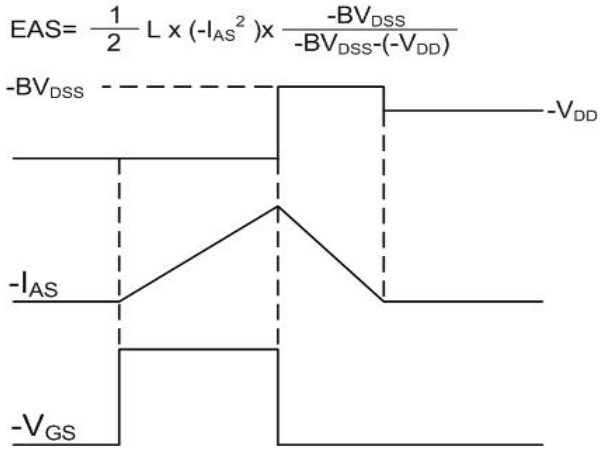


Fig.11 Unclamped Inductive Switching Waveform