


客户确认

日期

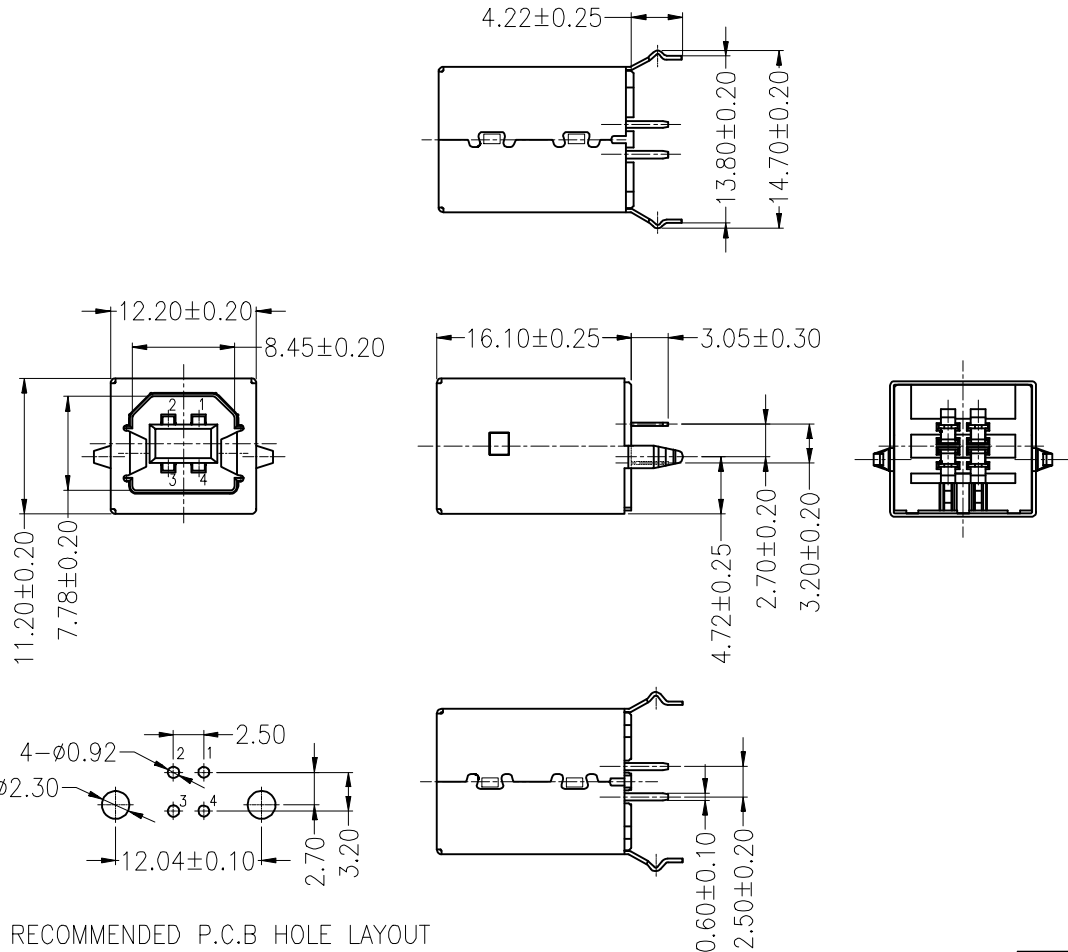

Specification
 1.Voltage Rating:30V AC
 2.Current Rating:1.5AMP.
 3.Insulation Resistance:1000M Ω Min.
 4.Contact Resistance:30m Ω Max.
 5.Dielectric Withstanding Voltage:500V AC
 6.Temperature Range:-20 Δ C to +60 Δ C
 7.Insertion Force:35N Max.
 8.Extraction Force:10N Min.

RECOMMENDED P.C.B HOLE LAYOUT
 TOP VIEW(TOLERANCE:±0.10)

3	Shell	C2680H	1	T=0.30 Plating nickel/Tin
2	Housing	P.B.T	1	UL94V-0 Nature/Black/White
1	Contact	C2680EH	4	T=0.25 Plating Gold
NO.	VARIETY	MATERIAL	Q'TY	REMARK

TOLERANCE TABLE	
.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD				
CHECKED:	DATE:	TITLE: USB-B/F-2*2P 180度 L=16.1mm DIP 白胶 铜壳 (全包)				
DRAWN: SXA	DATE: 2019-05-29	PART P/N		U-USBB04P-F000		
		UNIT	mm	SCALE	free	
		FILE NO.	Ckmtw-USBB-0005	REV.	A	YH00