

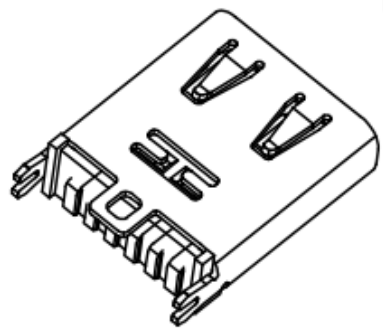


REV.	版本号	日期	姓名	日期
A0	新版发行		宋亮红	2017-02-24



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

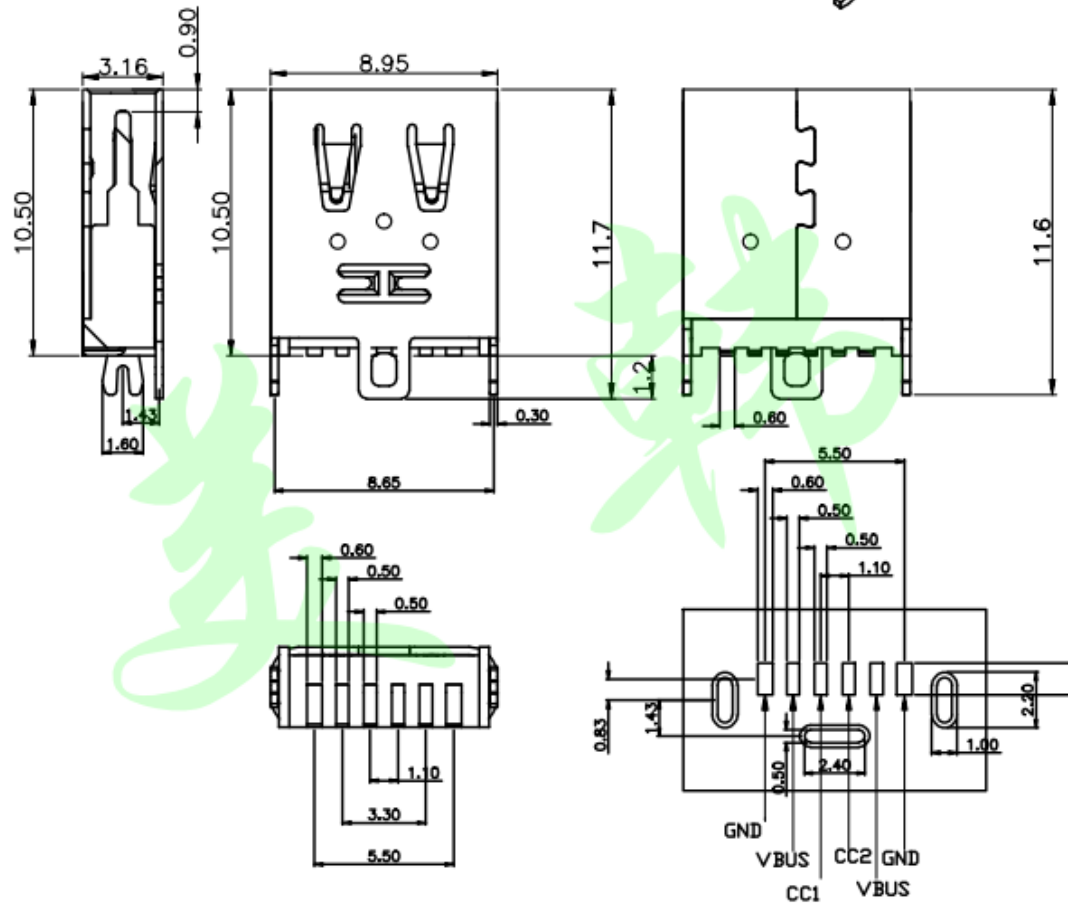

- NOTES:
- MATERIAL:
    - MOLDING: LCP UL94 V-0
    - CONTACT: COPPER ALLOY.
    - GOLD PLATED Min ON CONTACT AREA, 100u'
    - Min TIN (LEAD FREE) ON SOLDER AREA,
    - SHELL: SUS201-H,T=0.30±0.03mm
    - 50u" NICKEL PLATING OVER ALL.
  - MECHANICAL:
    - INSERTION: 5~20N.
    - EXTRACTION: 8~20N AFTER TEST.
    - DURABILITY: 5000 CYCLES
  - ELECTRICAL:
    - CURRENT: 3A FOR VBUS;
    - 1.25A FOR GND PIN.
    - 0.25A FOR OTHER.
    - VOLTAGE: 20 V MAX
    - WITHSTANDING VOLTAGE: 100V AC R.M.S.
    - CONTACT RESISTANCE: 40mΩ MAX.
    - INSULATION RESISTANCE: 100MΩ MIN.
  - ENVIRONMENTAL
    - TEMPERATURE RANGE -25°C ~ +85°C
  - 尺寸标注事项: 图中有标注者为首件全检, 重点管控尺寸.
  - 产品符合RoHS标准

**东莞市美韩电子科技有限公司**  
**Dongguan Usakro Electronic Technology Co., Ltd.**

.X: ±0.35	.X': ±1.5'	DESIGN NO.: <b>CONNECTOR</b>	TITLE: TYPE C 6PIN PLUG简易版立贴10.5	
.XX: ±0.25	.XX': ±1.0'		PART NO.: SEE TABLE	TYPE C-6M-011
.XXX: ±0.20	.XXX': ±0.5'	APP.:	SCALE: 1:1	PAGE: 1/1
MAT'L: SEE NOTES		CHKD.:	DR.:	REV.:
FINISH:		DR.:	Len.Song	REV.: