



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

DC/DC SWITCHING POWER SUPPLY
SINGLE CHANNEL OUTPUT
10 WATTS

OCH10S SERIES



General Description

Features

1. Power module for PCB mountable
2. 2:1 input range
3. Regulated Output
4. Low ripple and Noise

Options

Application

Broad needs

Input

Input Voltage Range: DC9~18V OCH10S12-XX
DC18~36V OCH10S24-XX
DC36~75V OCH10S48-XX

Switching frequency: 300kHz (typ.)



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Output Characteristic		Models				
	Unit	OCH10S12-3.3	OCH10S12-5	OCH10S12-12	OCH10S12-15	OCH10S12-24
Output Voltage	Vdc	3.3	5	12	15	24
Output Current	mA	2500	2000	830	670	416
Ripple	mVpp	50mV	1%			
Noise(max)	mVpp	50mV	1%			
Voltage Accuracy	V	±2%				
Capacitor Load (max.)	uF	2200	2200	560	470	100
Regulation						
a. Line Regulation [max]	mV	± 0.5%				
b. Load Regulation	mV	± 3% for 3.3V output ± 1% for others				
c. Temperature Coefficient	/°C	± 0.02%				

Efficiency	*1	%	82	83	86	86	86
-------------------	-----------	----------	-----------	-----------	-----------	-----------	-----------

Output Characteristic		Models				
	Unit	OCH10S24-3.3	OCH10S24-5	OCH10S24-12	OCH10S24-15	OCH10S24-24
Output Voltage	Vdc	3.3	5	12	15	24
Output Current	mA	2500	2000	830	670	416
Ripple	mVpp	50mV	1%			
Noise(max)	mVpp	50mV	1%			
Voltage Accuracy	V	±2%				
Capacitor Load (max.)	uF	2200	2200	560	470	100
Regulation						
a. Line Regulation [max]		± 0.5%				
b. Load Regulation		± 3% for 3.3V output ± 1% for others				
c. Temperature Coefficient	/°C	± 0.02%				

Efficiency	%	82	85	86	86	86
*1						



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037

Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com

email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Output Characteristic		Models				
	Unit	OCH10S48-3.3	OCH10S48-5	OCH10S48-12	OCH10S48-15	OCH10S48-24
Output Voltage	Vdc	3.3	5	12	15	24
Output Current	mA	2500	2000	830	670	416
Ripple	mVpp	50mV	1%			
Noise(max)	mVpp	50mV	1%			
Voltage Accuracy	V	±2%				
Capacitor Load (max.)	uF	2200	2200	560	470	100
Regulation						
a. Line Regulation [max]		± 0.5%				
b. Load Regulation		± 3% for 3.3V output ± 1% for others				
c. Temperature Coefficient	/°C	± 0.02%				
Efficiency *1	%	82	85	86	86	86

Conditions:

*1 Rated input and Rated output

*2 at Output current quick change 25% to 75%

*3 At 100% load (convection cooling)

Environmental Specification	
Operating Temperature*3	-25 to +60 °C (at full load)
Storage Temperature	-55 to +105 °C
Storage Humidity	95% RH [non-condensing] max
Isolation Resistance	Input-Output 100MΩ
Isolation Voltage	1600 VDC
Isolation Capacitance	1000pF
Cooling	Convection
MTBF	>800,000 hours at 25°C
Function/Protection	
Short circuit Protection	Current limit, auto-recovery
Over Power Protection	Works at over 105% and auto-recovery
Mechanical	
Dimension [mm]	31.8W × 20.3L × 10.2H ±0.5
Weight [g] (typical)	20



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037

Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com


email at: sales@eta-usa.com




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Derating Curves

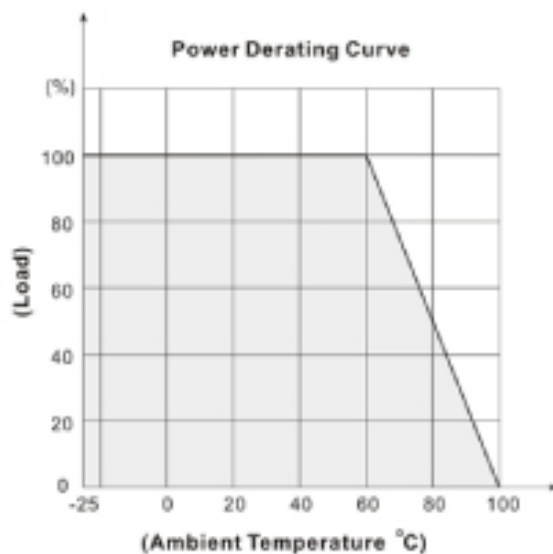

Mechanical drawings

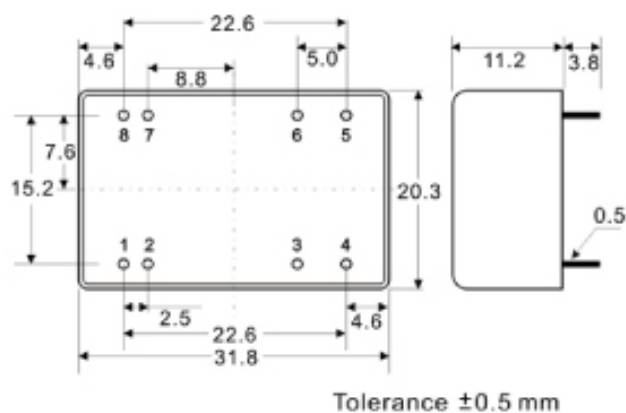

PIN#	Single	Dual
1	-VIN	-VIN
2	-VIN	-VIN
3	NO PIN	COMMON
4	NC	-VOUT
5	+VOUT	+VOUT
6	-VOUT	COMMON
7	+VIN	+VIN
8	+VIN	+VIN



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Block Diagram

Single Output

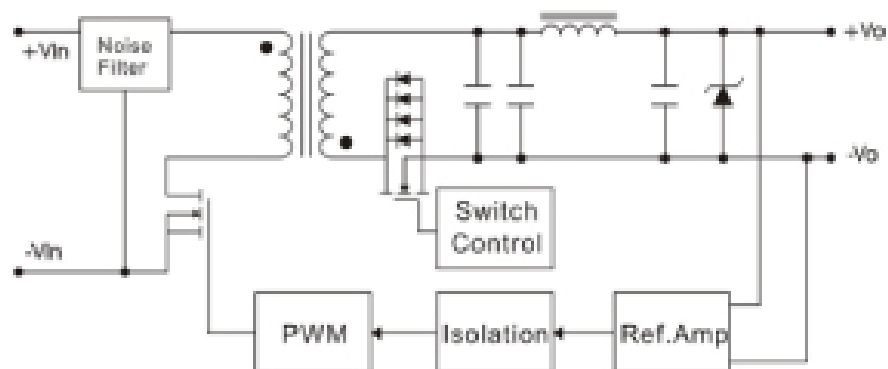

ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com