Document Title

128Kx36 & 256Kx18 Synchronous Pipelined SRAM

Revision History

Rev. No.	History	Draft Date	Remark
Rev. 0.0	- Initial Document.	May. 2002	Preliminary
Rev. 0.1	- Update Pin Discription. (M2=VDDQ -> M2=VDD) - Add AC characteristics. (250Mhz, 166Mhz)	Oct. 2002	Preliminary
Rev. 0.2	- Update DC CHARACTERISTICS x36 : I_{DD25} : TBD -> 370, I_{DD20} -> 340, I_{DD16} -> 320. x18 : I_{DD25} : TBD -> 360, I_{DD20} -> 330, I_{DD16} -> 310.	Jan. 2003	Preliminary
Rev. 1.0	- Final Version	Jun. 2003	Final
Rev. 1.1	- Add single ended or differential LVTTL clock Inputs on clock comment.	Jul. 2003	Final
Rev. 1.2	- Change AC Characteristics tKHQV : 25 - 2.5ns, 20 - 2.7ns	Jul. 2003	Final

The attached data sheets are prepared and approved by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications. SAMSUNG Electronics will evaluate and reply to your requests and questions on the parameters of this device. If you have any questions, please contact the SAMSUNG branch office near your office, call or cortact Headquarters.

128Kx36 & 256Kx18 Synchronous Pipelined SRAM

FEATURES

- 128Kx36 or 256Kx18 Organizations.
- 3.3V V_{DD}, 2.5/3.3V V_{DDQ}.
- LVTTL Input and Output Levels.
- Differential, PECL clock / Single ended or differential LVTTL clock Inputs
- Synchronous Read and Write Operation.
- Registered Input and Registered Output.
- Internal Pipeline Latches to Support Late Write.
- Byte Write Capability(four byte write selects, one for each 9bits)
- Synchronous or Asynchronous Output Enable.
- Power Down Mode via ZZ Signal.
- JTAG Boundary Scan (subset of IEEE std. 1149.1).
- 119(7x17)Pin Ball Grid Array Package(14mmx22mm).

Organization	Part Number	Maximum Frequency	Access Time
128Kx36	K7P403622B-HC25	250MHz	2.5
128Kx36	K7P403622B-HC20	200MHz	2.7
128Kx36	K7P403622B-HC16	166MHz	3.0
256Kx18	K7P401822B-HC25	250MHz	2.5
256Kx18	K7P401822B-HC20	200MHz	2.7
256Kx18	K7P401822B-HC16	166MHz	3.0

FUNCTIONAL BLOCK DIAGRAM

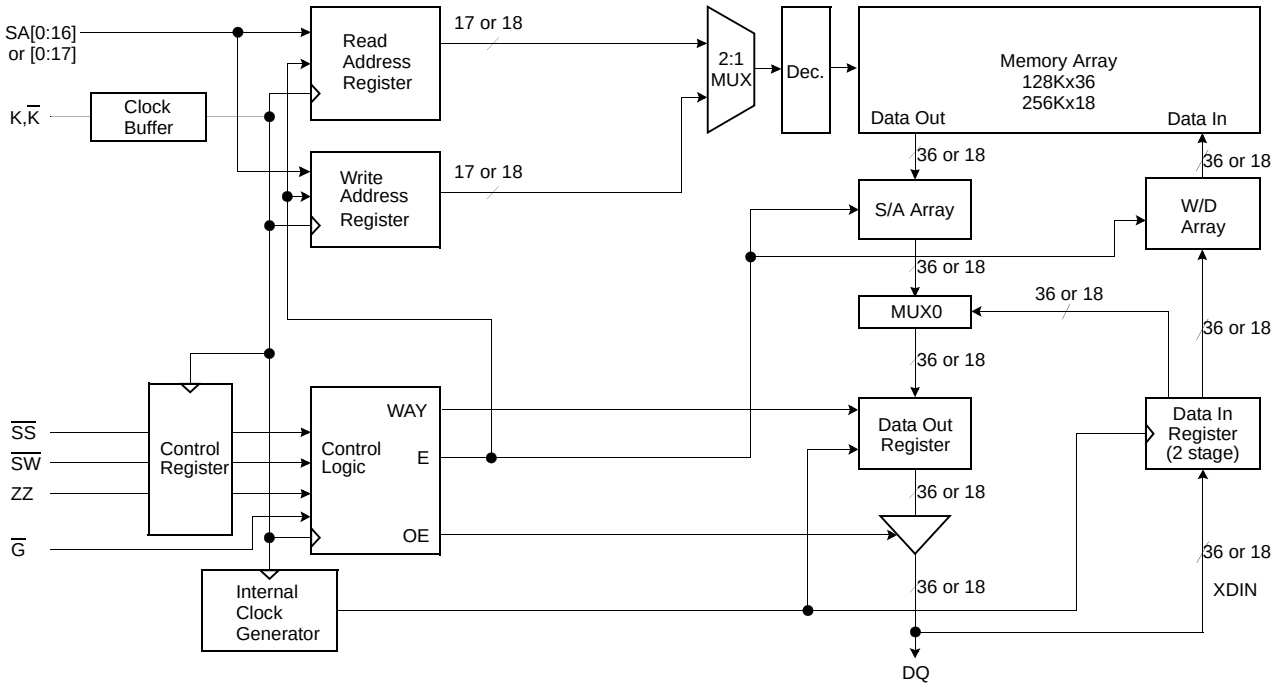

PIN DESCRIPTION

Pin Name	Pin Description	Pin Name	Pin Description
K, $\overline{K}$	Differential Clocks	ZZ	Asynchronous Power Down
SAn	Synchronous Address Input	$\overline{G}$	Asynchronous Output Enable
DQn	Bi-directional Data Bus	TCK	JTAG Test Clock
$\overline{SS}$	Synchronous Select	TMS	JTAG Test Mode Select
$\overline{SW}$	Synchronous Global Write Enable	TDI	JTAG Test Data Input
$\overline{SW}$a	Synchronous Byte a Write Enable	TDO	JTAG Test Data Output
$\overline{SW}$b	Synchronous Byte b Write Enable	V_{DD}	Power Supply
$\overline{SW}$c	Synchronous Byte c Write Enable	V_{DDQ}	Output Power Supply
$\overline{SW}$d	Synchronous Byte d Write Enable	V_{SS}	GND
M_1, M_2	Read Protocol Mode Pins (M_1=V_{SS}, M_2=V_{DD})	NC	No Connection

PACKAGE PIN CONFIGURATIONS(TOP VIEW)

K7P403622B(128Kx36)

	1	2	3	4	5	6	7
A	V_{DDQ}	SA_{13}	SA_{10}	NC	SA_7	SA_4	V_{DDQ}
B	NC	NC	SA_9	NC	SA_8	NC	NC
C	NC	SA_{12}	SA_{11}	V_{DD}	SA_6	SA_5	NC
D	DQc_8	DQc_9	V_{SS}	NC	V_{SS}	DQb_9	DQb_8
E	DQc_6	DQc_7	V_{SS}	$\overline{SS}$	V_{SS}	DQb_7	DQb_6
F	V_{DDQ}	DQc_5	V_{SS}	$\overline{G}$	V_{SS}	DQb_5	V_{DDQ}
G	DQc_3	DQc_4	$\overline{SW}c$	NC	$\overline{SW}b$	DQb_4	DQb_3
H	DQc_1	DQc_2	V_{SS}	NC	V_{SS}	DQb_2	DQb_1
J	V_{DDQ}	V_{DD}	NC	V_{DD}	NC	V_{DD}	V_{DDQ}
K	DQd_1	DQd_2	V_{SS}	K	V_{SS}	DQa_2	DQa_1
L	DQd_3	DQd_4	$\overline{SW}d$	$\overline{K}$	$\overline{SW}a$	DQa_4	DQa_3
M	V_{DDQ}	DQd_5	V_{SS}	$\overline{SW}$	V_{SS}	DQa_5	V_{DDQ}
N	DQd_6	DQd_7	V_{SS}	SA_{16}	V_{SS}	DQa_7	DQa_6
P	DQd_8	DQd_9	V_{SS}	SA_0	V_{SS}	DQa_9	DQa_8
R	NC	SA_{15}	M_1	V_{DD}	M_2	SA_2	NC
T	NC	NC	SA_{14}	SA_1	SA_3	NC	ZZ
U	V_{DDQ}	TMS	TDI	TCK	TDO	NC	V_{DDQ}

K7P401822B(256Kx18)

	1	2	3	4	5	6	7
A	V_{DDQ}	SA_{13}	SA_{10}	NC	SA_7	SA_4	V_{DDQ}
B	NC	NC	SA_9	NC	SA_8	NC	NC
C	NC	SA_{12}	SA_{11}	V_{DD}	SA_6	SA_5	NC
D	DQb_1	NC	V_{SS}	NC	V_{SS}	DQa_9	NC
E	NC	DQb_2	V_{SS}	$\overline{SS}$	V_{SS}	NC	DQa_8
F	V_{DDQ}	NC	V_{SS}	$\overline{G}$	V_{SS}	DQa_7	V_{DDQ}
G	NC	DQb_3	$\overline{SW}b$	NC	NC	NC	DQa_6
H	DQb_4	NC	V_{SS}	NC	V_{SS}	DQa_5	NC
J	V_{DDQ}	V_{DD}	NC	V_{DD}	NC	V_{DD}	V_{DDQ}
K	NC	DQb_5	V_{SS}	K	V_{SS}	NC	DQa_4
L	DQb_6	NC	NC	$\overline{K}$	$\overline{SW}a$	DQa_3	NC
M	V_{DDQ}	DQb_7	V_{SS}	$\overline{SW}$	V_{SS}	NC	V_{DDQ}
N	DQb_8	NC	V_{SS}	SA_{16}	V_{SS}	DQa_2	NC
P	NC	DQb_9	V_{SS}	SA_1	V_{SS}	NC	DQa_1
R	NC	SA_{15}	M_1	V_{DD}	M_2	SA_2	NC
T	NC	SA_{17}	SA_{14}	NC	SA_3	SA_0	ZZ
U	V_{DDQ}	TMS	TDI	TCK	TDO	NC	V_{DDQ}

FUNCTION DESCRIPTION

The K7P403622B and K7P401822B are 4,718,592 bit Synchronous Pipeline Mode SRAM devices. They are organized as 131,072 words by 36 bits for K7P403622B and 262,144 words by 18 bits for K7P401822B, fabricated using Samsung's advanced CMOS technology.

Single differential PECL level K clocks or Single ended or differential LVTTL clocks are used to initiate read/write operation and all internal operations are self-timed. At the rising edge of K clock, Addresses, Write Enables, Synchronous Select and Data Ins are registered internally. Data outs are updated from output registers at the next rising edge of K clock. An internal write data buffer allows write data to follow one cycle after addresses and controls. The package is 119(7x17) Ball Grid Array with balls on a 1.27mm pitch.

Read Operation

During read operations, addresses and controls are registered during the first rising edge of K clock and then the internal array is read between first and second edges of K clock. Data outputs are updated from output registers off the second rising edge of K clock. During consecutive read operations where the address is the same, the data output must be held constant without any glitches. This characteristic is because the SRAM will be read by devices that will operate slower than the SRAM frequency and will require multiple SRAM cycles to perform a single read operation.

Write Operation(Late Write)

During write operations, addresses and controls are registered at the first rising edge of K clock and data inputs are registered at the following rising edge of K clock. Write addresses and data inputs are stored in the data in registers until the next write operation, and only at the next write opeation are data inputs fully written into SRAM array. Byte write operation is supported using $\overline{SW}$[a:d] and the timing of $\overline{SW}$[a:d] is the same as the $\overline{SW}$ signal.

Bypass Read Operation

Bypass read operation occurs when the last write operation is followed by a read operation where write and read addresses are identical. For this case, data outputs are from the data in registers instead of SRAM array. Bypass read operation occurs on a byte to byte basis. If only one byte is written during a write operation but a read operation is required on the same address, a partial bypass read operation occurs since the new byte data is from the data in registers while the remaing bytes are from SRAM array.

Sleep Mode

Sleep mode is a low power mode initiated by bringing the asynchronous ZZ pin high. During sleep mode, all other inputs are ignored and outputs are brought to a High-Impedance state. Sleep mode current and output High-Z are guaranteed after the specified sleep mode enable time. During sleep mode the memory array data content is preserved. Sleep mode must not be initiated until after all pending operations have completed, since any pending operation will not guaranteed once sleep mode is initiated. Normal operations can be resumed by bringing the ZZ pin low, but only after the specified sleep mode recovery time.

Mode Control

There are two mode control select pins (M_1 and M_2) used to set the proper read protocol. This SRAM supports single clock pipelined operating mode. For proper specified device operation, M_1 must be connected to V_{SS} and M_2 must be connected to V_{DD}. These mode pins must be set at power-up and must not change during device operation.

Power-Up/Power-Down Supply Voltage Sequence

The following power-up supply voltage sequence is recommended: V_{SS}, V_{DD}, V_{DDQ}, and V_{IN}. V_{DD} and V_{DDQ} can be applied simultaneously, as long as V_{DDQ} does not exceed V_{DD} by more than 0.5V during power-up. The following power-down supply voltage removal sequence is recommended: V_{IN}, V_{REF}, V_{DDQ}, V_{DD}, V_{SS}. V_{DD} and V_{DDQ} can be removed simultaneously, as long as V_{DDQ} does not exceed V_{DD} by more than 0.5V during power-down.

TRUTH TABLE

K	ZZ	$\overline{G}$	$\overline{SS}$	$\overline{SW}$	$\overline{SWa}$	$\overline{SWb}$	$\overline{SWc}$	$\overline{SWd}$	DQa	DQb	DQc	DQd	Operation
X	H	X	X	X	X	X	X	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Power Down Mode. No Operation
X	L	H	X	X	X	X	X	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Output Disabled.
↑	L	L	H	X	X	X	X	X	Hi-Z	Hi-Z	Hi-Z	Hi-Z	Output Disabled. No Operation
↑	L	L	L	H	X	X	X	X	DOUT	DOUT	DOUT	DOUT	Read Cycle
↑	L	X	L	L	H	H	H	H	Hi-Z	Hi-Z	Hi-Z	Hi-Z	No Bytes Written
↑	L	X	L	L	L	H	H	H	DIN	Hi-Z	Hi-Z	Hi-Z	Write first byte
↑	L	X	L	L	H	L	H	H	Hi-Z	DIN	Hi-Z	Hi-Z	Write second byte
↑	L	X	L	L	H	H	L	H	Hi-Z	Hi-Z	DIN	Hi-Z	Write third byte
↑	L	X	L	L	H	H	H	L	Hi-Z	Hi-Z	Hi-Z	DIN	Write fourth byte
↑	L	X	L	L	L	L	L	L	DIN	DIN	DIN	DIN	Write all bytes

NOTE : K & $\overline{K}$ are complementary

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit	Note
Core Supply Voltage Relative to VSS	VDD	-0.3 to 4.6	V	
Output Supply Voltage Relative to VSS	VDDQ	VDD	V	
Voltage on any I/O pin Relative to VSS	VTERM	-0.3 to VDD+0.3	V	
Output Short-Circuit Current	IOUT	25	mA	
Operating Temperature	TOPR	0 to 70	°C	
Storage Temperature	TSTG	-65 to 150	°C	

NOTE : Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit	Note
Core Power Supply Voltage	VDD	3.15	3.3	3.45	V	
Output Power Supply Voltage (for 2.5V I/O)	VDDQ	2.375	2.5	2.9	V	
Output Power Supply Voltage (for 3.3V I/O)	VDDQ	3.135	3.3	3.6	V	
Input High Level (for 2.5V I/O)	VIH	1.7	-	VDD+0.3	V	
Input Low Level (for 2.5V I/O)	VIL	-0.3	-	0.7	V	
Input High Level (for 3.3V I/O)	VIH	2.0	-	VDD+0.3	V	
Input Low Level (for 3.3V I/O)	VIL	-0.3	-	0.8	V	
PECL Clock Input High Level	VIH-PECL	2.135	-	2.420	V	1
PECL Clock Input Low Level	VIL-PECL	1.490	-	1.825	V	1
Clock Input Signal Voltage	VIN	-0.3	-	3.45	V	2
Clock Input Differential Voltage	VDIF-CLK	0.2	-	VDD+0.6	V	2
Clock Input Common Mode Voltage	VCM-CLK	1.1	-	2.1	V	2
Operating Junction Temperature	TJ	10	-	110	°C	

NOTE

1. For operation with differential PECL clock inputs.
2. For operation with single ended or differential LVCMOS / LVTTL clock input.

PIN CAPACITANCE

Parameter	Symbol	Test Condition	TYP	Max	Unit
Input Capacitance	C_{IN}	V_{IN}=0V	-	5	pF
Data Output Capacitance	C_{OUT}	V_{OUT}=0V	-	7	pF

NOTE : Periodically sampled and not 100% tested.(T_A=25°C, f=1MHz)

DC CHARACTERISTICS

Parameter	Symbol	Min	Max	Unit	Note
Average Power Supply Operating Current-x36 (V_{IN}=V_{IH} or V_{IL}, ZZ & $\overline{SS}$=V_{IL})	I_{DD25} I_{DD20} I_{DD16}	-	370 340 320	mA	1, 2
Average Power Supply Operating Current-x18 (V_{IN}=V_{IH} or V_{IL}, ZZ & $\overline{SS}$=V_{IL})	I_{DD25} I_{DD20} I_{DD16}	-	360 330 310	mA	1, 2
Power Supply Standby Current (V_{IN}=V_{IH} or V_{IL}, ZZ=V_{IH})	I_{SB}	-	120	mA	1
Input Leakage Current (V_{IN}=V_{SS} or V_{DD})	I_{LI}	-1	1	μA	
Output Leakage Current (V_{OUT}=V_{SS} or V_{DDQ}, ZZ=V_{IH}, $\overline{G}$=V_{IH})	I_{LO}	-1	1	μA	
Output High Voltage(I_{OH}=-4mA) for V_{DDQ}=3.3V Output High Voltage(I_{OH}=-4mA) for V_{DDQ}=2.5V	V_{OH1} V_{OH2}	2.4 2.0	V_{DDQ}	V	
Output Low Voltage(I_{OL}=4mA)	V_{OL}	V_{SS}	0.4	V	

NOTE :1. Minimum cycle. I_{OUT}=0mA.
2. 50% read cycles.

AC TEST CONDITIONS

Parameter	Symbol	Value	Unit
Core Power Supply Voltage	V_{DD}	3.15~3.45	V
Output Power Supply Voltage	V_{DDQ}	2.4~2.6	V
Input High/Low Level	V_{IH}/V_{IL}	1.7/0.7	V
Clock Input High/Low Level(PECL)	V_{IH}/V_{IL}	2.4/1.5	V
Input Rise/Fall Time	T_R/T_F	1.0/1.0	ns
Clock Input Rise/Fall Time(PECL)	T_R/T_F	1.0/1.0	ns
Input and Out Timing Reference Level		1.25	V
Clock Input Timing Reference Level		Cross Point	V

AC TEST OUTPUT LOAD

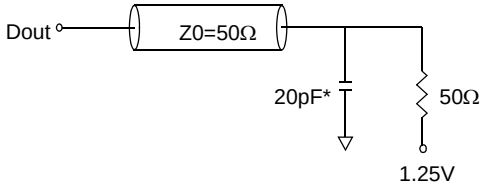

*Capacitive load consists of all components of the tester environment

AC CHARACTERISTICS

Parameter	Symbol	-25		-20		-16		Unit	Note
		Min	Max	Min	Max	Min	Max		
Clock Cycle Time	t_{KHKH}	4.0	-	5.0	-	6.0	-	ns	
Clock High Pulse Width	t_{KHKL}	1.4	-	1.5	-	1.5	-	ns	
Clock Low Pulse Width	t_{KLKH}	1.4	-	1.5	-	1.5	-	ns	
Clock High to Output Valid	t_{KHQV}	-	2.5	-	2.7	-	3.0	ns	
Clock High to Output Hold	t_{KHQX}	0.5	-	0.5	-	0.5	-	ns	
Address Setup Time	t_{AVKH}	0.4	-	0.5	-	0.5	-	ns	
Address Hold Time	t_{KHAX}	0.7	-	1.0	-	1.0	-	ns	
Write Data Setup Time	t_{DVKH}	0.4	-	0.5	-	0.5	-	ns	
Write Data Hold Time	t_{KHDX}	0.7	-	1.0	-	1.0	-	ns	
$\overline{SW}$, $\overline{SW}$[a:d] Setup Time	t_{WVKH}	0.4	-	0.5	-	0.5	-	ns	
$\overline{SW}$, $\overline{SW}$[a:d] Hold Time	t_{KHWX}	0.7	-	1.0	-	1.0	-	ns	
$\overline{SS}$ Setup Time	t_{SVKH}	0.4	-	0.5	-	0.5	-	ns	
$\overline{SS}$ Hold Time	t_{KHSX}	0.7	-	1.0	-	1.0	-	ns	
Clock High to Output Hi-Z	t_{KHQZ}	-	2.3	-	2.5	-	3.0	ns	
Clock High to Output Low-Z	t_{KHQX1}	0.5	-	0.5	-	0.5	-	ns	
$\overline{G}$ High to Output High-Z	t_{GHQZ}	-	2.3	-	2.5	-	3.0	ns	
$\overline{G}$ Low to Output Low-Z	t_{GLQX}	0.5	-	0.5	-	0.5	-	ns	
$\overline{G}$ Low to Output Valid	t_{GLQV}	-	2.3	-	2.5	-	3.0	ns	
ZZ High to Power Down(Sleep Time)	t_{ZZE}	-	15	-	15	-	15	ns	
ZZ Low to Recovery(Wake-up Time)	t_{ZZR}	-	20	-	20	-	20	ns	

TIMING WAVEFORMS OF NORMAL ACTIVE CYCLES ($\overline{SS}$ Controlled, $\overline{G}$=Low)

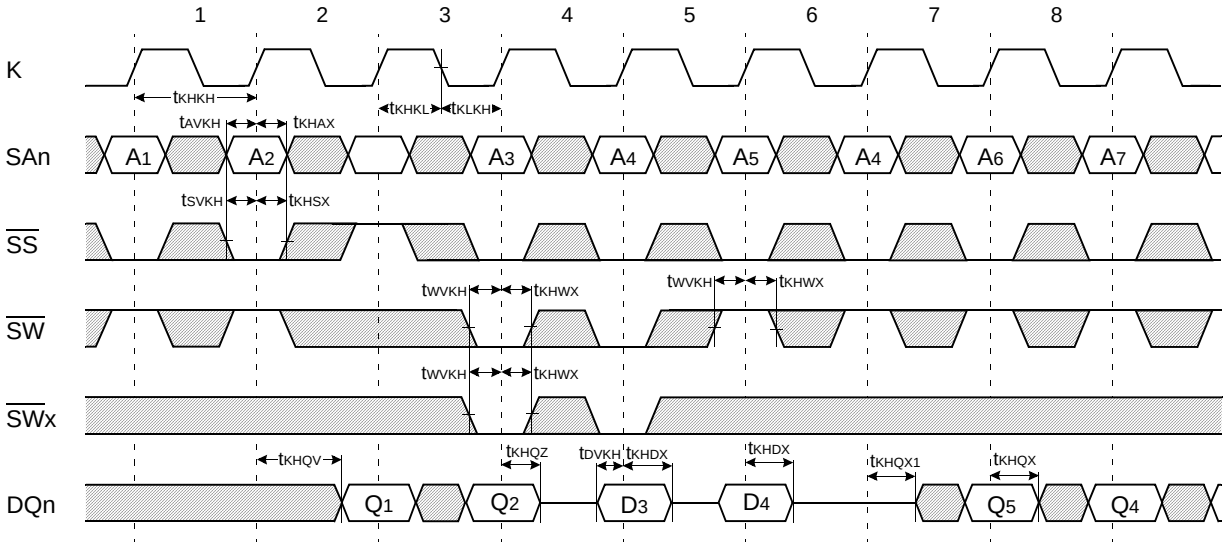

NOTE

1. D_3 is the input data written in memory location A_3.
2. Q_4 is the output data read from the write data buffer(not from the cell array), as a result of address A_4 being a match from the last write cycle address.

TIMING WAVEFORMS OF NORMAL ACTIVE CYCLES ($\overline{G}$ Controlled, $\overline{SS}$=Low)

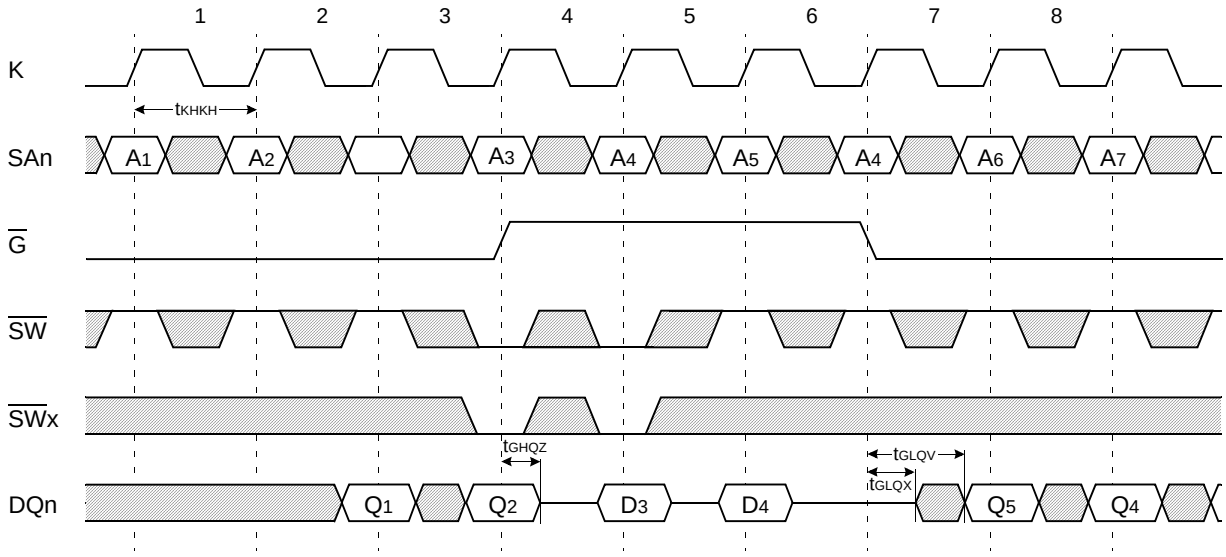

NOTE

1. D_3 is the input data written in memory location A_3.
2. Q_4 is the output data read from the write data buffer(not from the cell array), as a result of address A4 being a match from the last write cycle address.

TIMING WAVEFORMS OF STANDBY CYCLES

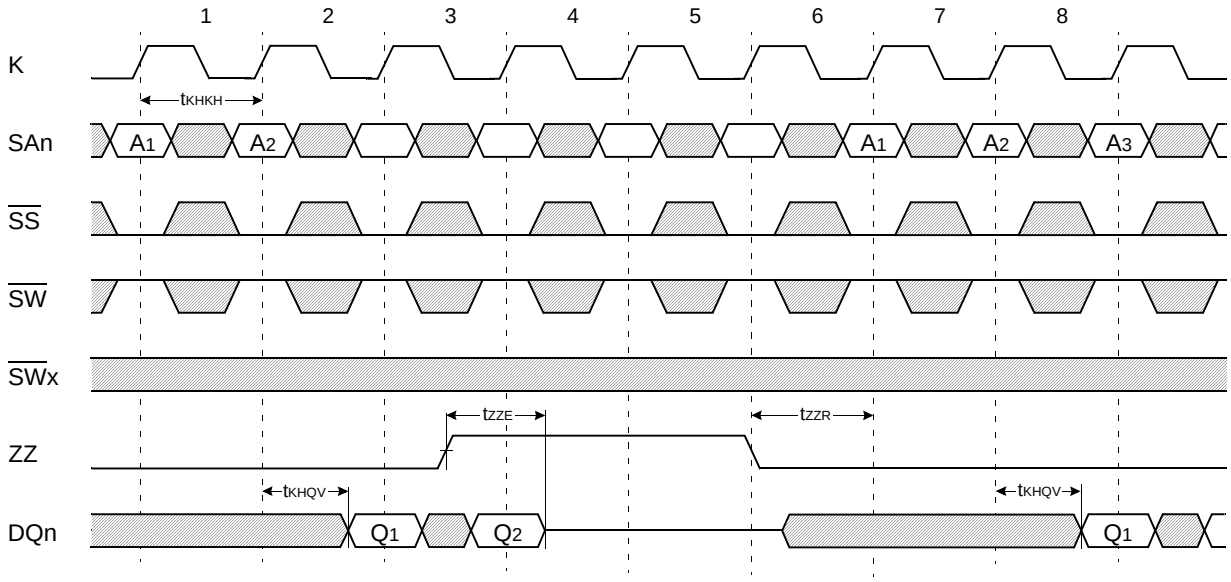

IEEE 1149.1 TEST ACCESS PORT AND BOUNDARY SCAN-JTAG

The SRAM provides a limited set of IEEE standard 1149.1 JTAG functions. This is to test the connectivity during manufacturing between SRAM, printed circuit board and other components. Internal data is not driven out of SRAM under JTAG control. In conformance with IEEE 1149.1, the SRAM contains a TAP controller, Instruction Register, Bypass Register and ID register. The TAP controller has a standard 16-state machine that resets internally upon power-up, therefore, TRST signal is not required. It is possible to use this device without utilizing the TAP. To disable the TAP controller without interfacing with normal operation of the SRAM, TCK must be tied to V_{SS} to preclude mid level input. TMS and TDI are designed so an undriven input will produce a response identical to the application of a logic 1, and therefore can be left unconnected. But they may also be tied to V_{DD} through a resistor. TDO should be left unconnected.

JTAG Block Diagram

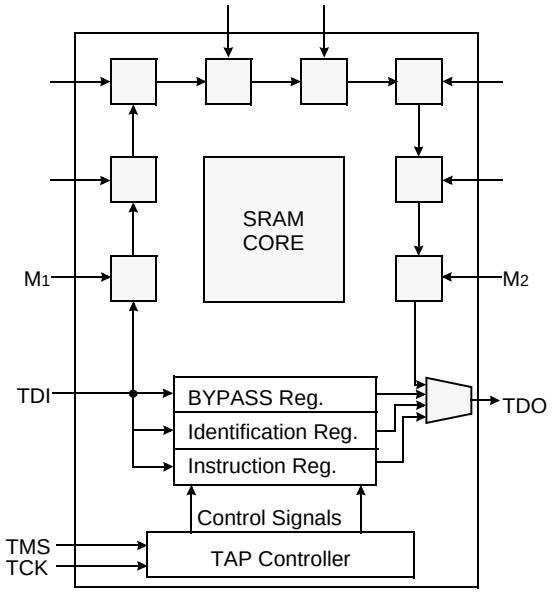

JTAG Instruction Coding

IR2	IR1	IR0	Instruction	TDO Output	Notes
0	0	0	SAMPLE-Z	Boundary Scan Register	1
0	0	1	IDCODE	Identification Register	2
0	1	0	SAMPLE-Z	Boundary Scan Register	1
0	1	1	BYPASS	Bypass Register	3
1	0	0	SAMPLE	Boundary Scan Register	4
1	0	1	BYPASS	Bypass Register	3
1	1	0	BYPASS	Bypass Register	3
1	1	1	BYPASS	Bypass Register	3

NOTE :

1. Places DQs in Hi-Z in order to sample all input data regardless of other SRAM inputs.
2. TDI is sampled as an input to the first ID register to allow for the serial shift of the external TDI data.
3. Bypass register is initiated to V_{SS} when BYPASS instruction is invoked. The Bypass Register also holds serially loaded TDI when exiting the Shift DR states.
4. SAMPLE instruction does not places DQs in Hi-Z.

TAP Controller State Diagram

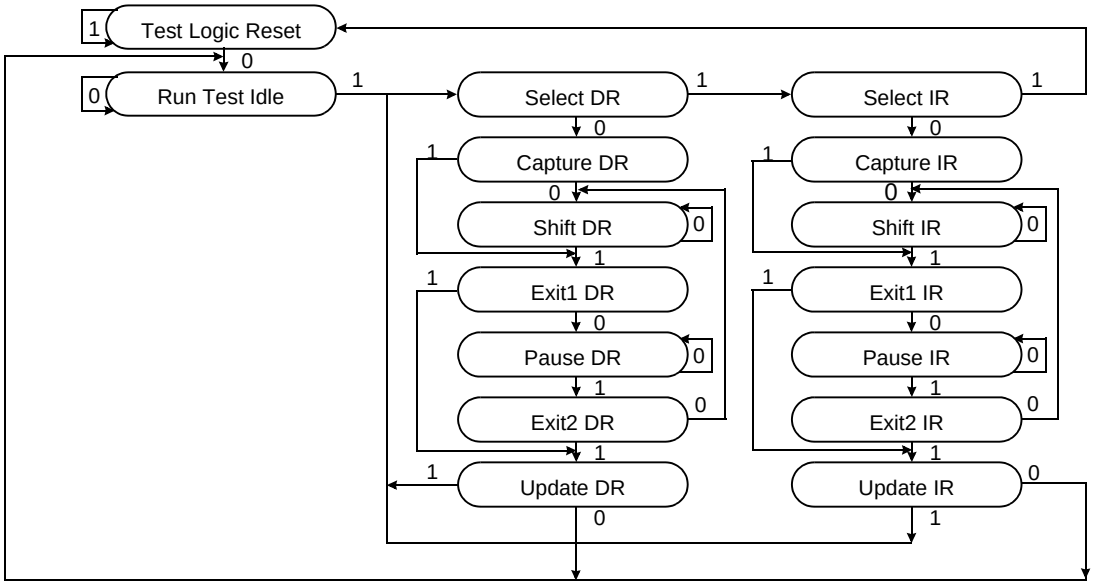

SCAN REGISTER DEFINITION

Part	Instruction Register	Bypass Register	ID Register	Boundary Scan
128Kx36	3 bits	1 bits	32 bits	70 bits
256Kx18	3 bits	1 bits	32 bits	51 bits

ID REGISTER DEFINITION

Part	Revision Number (31:28)	Part Configuration (27:18)	Vendor Definition (17:12)	Samsung JEDEC Code (11: 1)	Start Bit(0)
128Kx36	0000	00101 00100	XXXXXX	00001001110	1
256Kx18	0000	00110 00011	XXXXXX	00001001110	1

BOUNDARY SCAN EXIT ORDER(x36)

36	3B	SA_9		SA_8	5B	35
37	2B	NC		NC	6B	34
38	3A	SA_{10}		SA_7	5A	33
39	3C	SA_{11}		SA_6	5C	32
40	2C	SA_{12}		SA_5	6C	31
41	2A	SA_{13}		SA_4	6A	30
42	2D	DQc_9		DQb_9	6D	29
43	1D	DQc_8		DQb_8	7D	28
44	2E	DQc_7		DQb_7	6E	27
45	1E	DQc_6		DQb_6	7E	26
46	2F	DQc_5		DQb_5	6F	25
47	2G	DQc_4		DQb_4	6G	24
48	1G	DQc_3		DQb_3	7G	23
49	2H	DQc_2		DQb_2	6H	22
50	1H	DQc_1		DQb_1	7H	21
51	3G	$\overline{SW}c$		$\overline{SW}b$	5G	20
52	4D	NC		$\overline{G}$	4F	19
53	4E	$\overline{SS}$		K	4K	18
54	4G	NC		$\overline{K}$	4L	17
55	4H	NC		$\overline{SW}a$	5L	16
56	4M	$\overline{SW}$		DQa_1	7K	15
57	3L	$\overline{SW}d$		DQa_2	6K	14
58	1K	DQd_1		DQa_3	7L	13
59	2K	DQd_2		DQa_4	6L	12
60	1L	DQd_3		DQa_5	6M	11
61	2L	DQd_4		DQa_6	7N	10
62	2M	DQd_5		DQa_7	6N	9
63	1N	DQd_6		DQa_8	7P	8
64	2N	DQd_7		DQa_9	6P	7
65	1P	DQd_8		ZZ	7T	6
66	2P	DQd_9		SA_3	5T	5
67	3T	SA_{14}		SA_2	6R	4
68	2R	SA_{15}		SA_1	4T	3
69	4N	SA_{16}		SA_0	4P	2
70	3R	M_1		M_2	5R	1

BOUNDARY SCAN EXIT ORDER(x18)

26	3B	SA_9		SA_8	5B	25
27	2B	NC		NC	6B	24
28	3A	SA_{10}		SA_7	5A	23
29	3C	SA_{11}		SA_6	5C	22
30	2C	SA_{12}		SA_5	6C	21
31	2A	SA_{13}		SA_4	6A	20
				DQa_9	6D	19
32	1D	DQb_1				
33	2E	DQb_2				
				DQa_8	7E	18
				DQa_7	6F	17
34	2G	DQb_3				
				DQa_6	7G	16
				DQa_5	6H	15
35	1H	DQb_4				
36	3G	$\overline{SW}b$				
37	4D	NC		$\overline{G}$	4F	14
38	4E	$\overline{SS}$		K	4K	13
39	4G	NC		$\overline{K}$	4L	12
40	4H	NC		$\overline{SW}a$	5L	11
41	4M	$\overline{SW}$		DQa_4	7K	10
42	2K	DQb_5		DQa_3	6L	9
43	1L	DQb_6				
44	2M	DQb_7		DQa_2	6N	8
45	1N	DQb_8		DQa_1	7P	7
				ZZ	7T	6
46	2P	DQb_9		SA_3	5T	5
47	3T	SA_{14}		SA_2	6R	4
48	2R	SA_{15}				
49	4N	SA_{16}		SA_1	4P	3
50	2T	SA_{17}		SA_0	6T	2
51	3R	M_1		M_2	5R	1

NOTE : 1. Pins 6B and 2B are no connection pin to internal chip. These pins are place holders for 8Mb and 16Mb parts and the scanned data are fixed to "0" for this 4M parts.

JTAG DC OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit	Note
Power Supply Voltage	V_{DD}	3.15	3.3	3.45	V	
Input High Level	V_{IH}	1.7	-	V_{DD}+0.3	V	
Input Low Level	V_{IL}	-0.3	-	0.8	V	
Output High Voltage(I_{OH}=-2mA)	V_{OH}	2.1	-	V_{DD}	V	
Output Low Voltage(I_{OL}=2mA)	V_{OL}	V_{SS}	-	0.2	V	

NOTE : 1. The input level of SRAM pin is to follow the SRAM DC specification.

JTAG AC TEST CONDITIONS

Parameter	Symbol	Min	Unit	Note
Input High/Low Level	V_{IH}/V_{IL}	2.5/0.0	V	
Input Rise/Fall Time	TR/TF	1.0/1.0	ns	
Input and Output Timing Reference Level		1.25	V	1

NOTE : 1. See SRAM AC test output load on page 7.

JTAG AC Characteristics

Parameter	Symbol	Min	Max	Unit	Note
TCK Cycle Time	t_{CHCH}	50	-	ns	
TCK High Pulse Width	t_{CHCL}	20	-	ns	
TCK Low Pulse Width	t_{CLCH}	20	-	ns	
TMS Input Setup Time	t_{MVCH}	5	-	ns	
TMS Input Hold Time	t_{CHMX}	5	-	ns	
TDI Input Setup Time	t_{DVCH}	5	-	ns	
TDI Input Hold Time	t_{CHDX}	5	-	ns	
SRAM Input Setup Time	t_{SVCH}	5	-	ns	
SRAM Input Hold Time	t_{CHSX}	5	-	ns	
Clock Low to Output Valid	t_{CLQV}	0	10	ns	

JTAG TIMING DIAGRAM

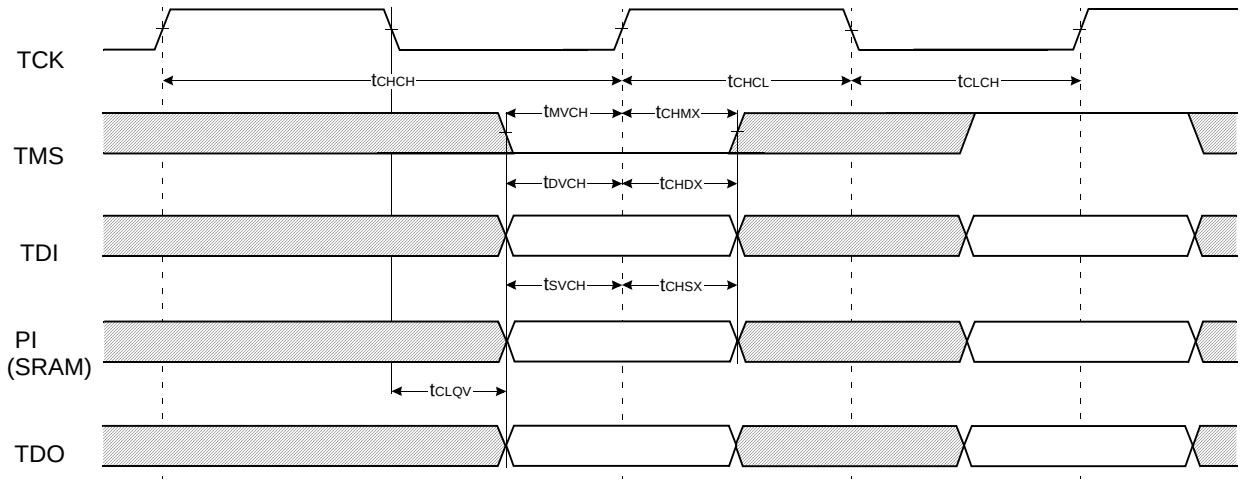

119 BGA PACKAGE DIMENSIONS

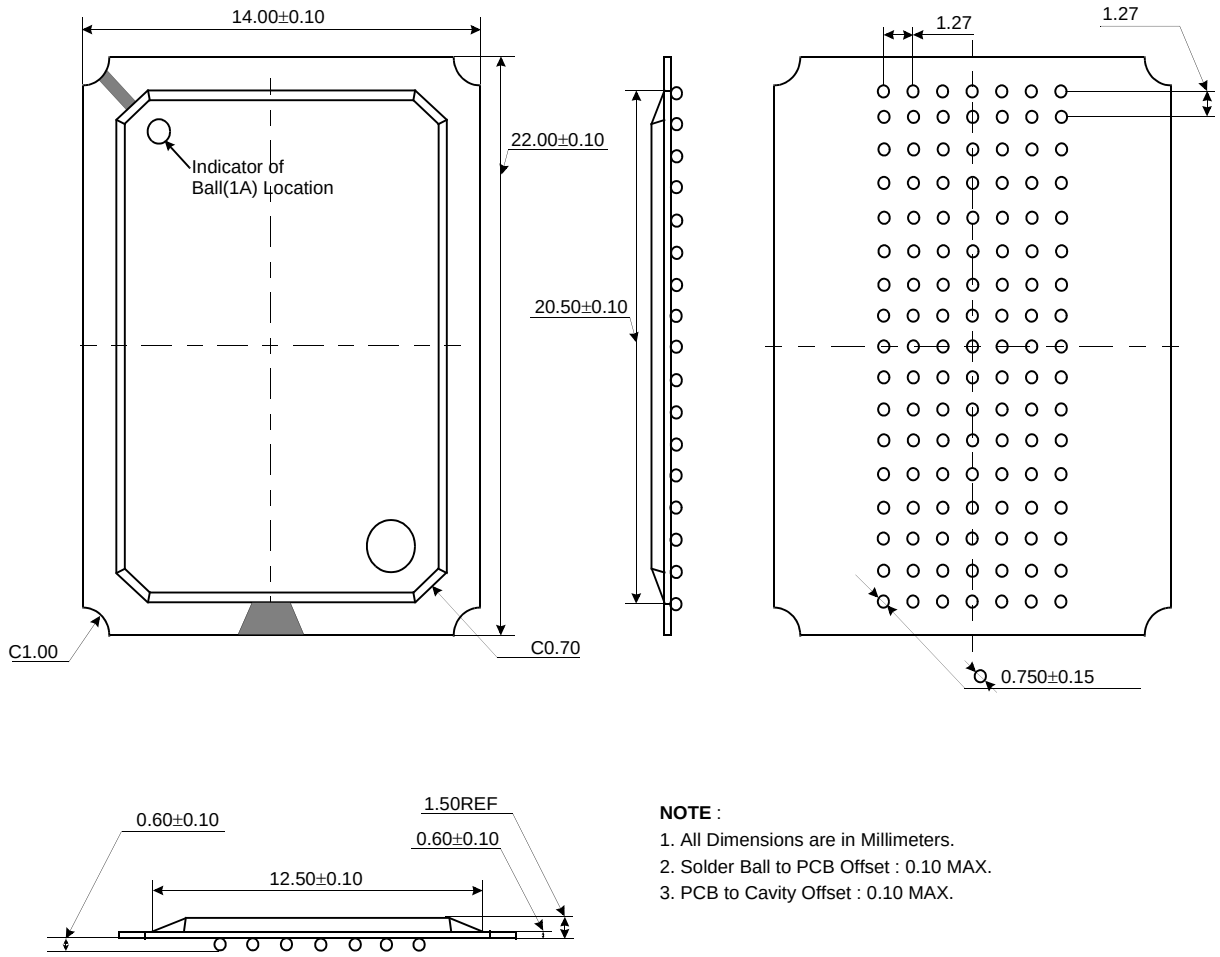

NOTE :
1. All Dimensions are in Millimeters.
2. Solder Ball to PCB Offset : 0.10 MAX.
3. PCB to Cavity Offset : 0.10 MAX.

119 BGA PACKAGE THERMAL CHARACTERISTICS

Parameter	Symbol	Thermal Resistance	Unit	Note
Junction to Ambient	Theta_JA	TBD	°C/W	
Junction to Case	Theta_JC	TBD	°C/W	
Junction to Solder Ball	Theta_JB	TBD	°C/W	

NOTE : 1. Junction temperature can be calculated by : $T_J = T_A + P_D$ x Theta_JA.