

Gas Discharge Tubes

High Performance Beta Range

SL1011B Series Gas Plasma Arrester





The SL1011B series offers high levels of performance on fast rising transients in the domain of 100V/ μ S to 1KV/ μ S, which are those most likely from induced Lightning disturbances. The SL1011B series also features ultra low capacitance (typically 1pF or less) making them ideal for the protection of high-speed transmission equipment. These devices are extremely robust and are able to divert a 10,000A pulse without destruction.

FEATURES

- Excellent response to fast rising transients.
- Ultra low capacitance.
- 10KA surge capability tested with 8/20 μ s pulse as defined by IEC 61000-4-5
- 10,000 A single shot surge capability tested with 8/20 μ s pulse as defined by IEC 61000-4-5

Applications:

- Broadband equipment.
- ADSL equipment.
- XDSL equipment.
- Satellite and CATV equipment.
- General telecom equipment.

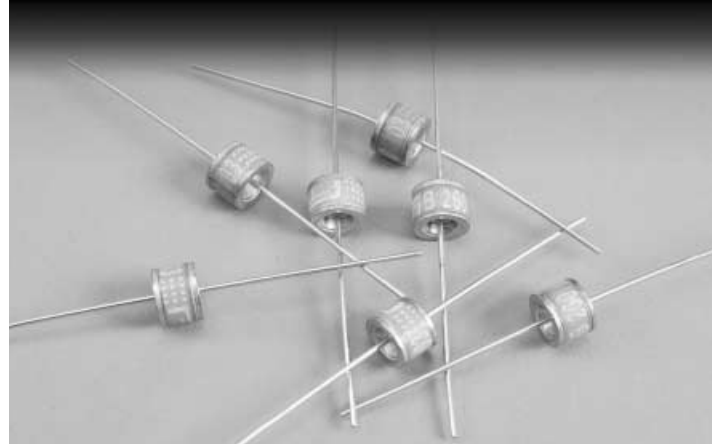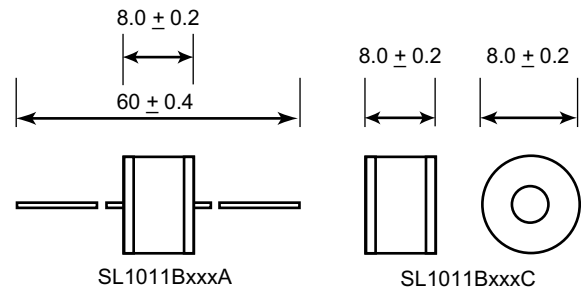

All dimensions in mm



2 ELECTRODE GDT

GRAPHICAL SYMBOL

ORDERING INFORMATION

SL 1011 B 1 1 1 1 1
Voltage ———
Pin Configuration ———

Mechanical Specifications:

Weight: 2.7g (0.095 oz.)
Materials: Electrode Base: Nickel Iron Alloy
Electrode Plating: Bright Sn
Body: Ceramic

Device Marking: Littelfuse 'LF' marking, Voltage and date code.

Gas Discharge Tubes

High Performance Beta Range

SL1011B Series Gas Plasma Arrester



LITTELFUSE 2 TERMINAL ARRESTER SERIES

TOTALLY NON-RADIOACTIVE, UL RECOGNIZED

Part Number	DC Voltage (V)	DC Breakover Voltage Min-Max (V)	Max Dynamic Breakover Voltage @ 100V/ μ s ² (V)	Alternating Discharge Current (A)	Max Repetitive Impulse Discharge Current ¹ (kA)	Max Single Impulse Discharge Current 8/20 μ s (kA)	Max Single Impulse Discharge Current 10/350 μ s (kA)
SL1011B230	230	184-276	375	10	(kA)	20	2.5
SL1011B250	250	200-300	400	10	10	20	2.5
SL1011B260	260	210-310	420	10	10	20	2.5
SL1011B350	350	280-420	500	10	10	20	2.5
SL1011B500	500	400-500	750	10	10	20	2.5
SL1011B600	600	480-720	450	10	10	20	2.5

(1) 10 shots, 8/20 μ s waveform.

(2) 10 shots, A.C. 60 Hz, 1 sec duration.

Note: Other outlines available on request.

Voltage vs Time Characteristic

