
UF92AM series




(92 x 92 x 38 mm)


3.62 x 3.62 x 1.5 inches

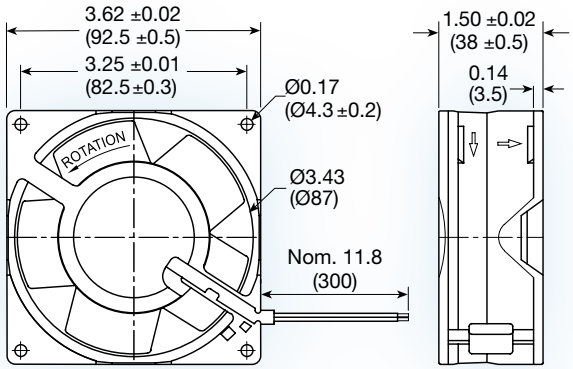

LEAD WIRE TYPE



TERMINAL TYPE

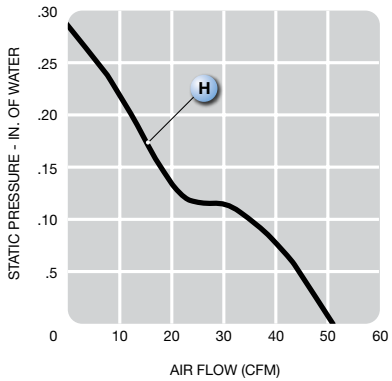

Features:	**high temp; -40°C ~ 90°C operating temperature range**
Operating voltage:	115 or 230 VAC
Construction:	aluminum die cast frame; metal impeller
Bearing option:	ball bearing with high temp lubricant
Motor:	shaded pole - Class F insulation
Air Flow:	exhaust over struts
Connection:	terminal or 22 AWG lead wire
Protection:	impedance

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Locked Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	kg
UF92AM12-_ _H	115	60	11	0.12	0.17	3,200	1.45	51	7.5	0.30	42	0.43
UF92AM23-_ _H	230	60	11	0.06	0.08	3,200	1.45	51	7.5	0.30	42	0.43