


DESCRIPTION :
2W Isolated Single Output DC/DC Converters

The TPL series are miniature, isolated 2W DC/DC converters in a SIP package. They offer the ideal solution in many space critical applications for board level power distribution. The internal SMD construction makes it possible to offer a product with high performance at low cost. The series offers smaller size, improved efficiency, lower output ripple noise and 1.5~3KVDC isolation.

FEATURES

RoHS compliant	Single isolated output	1.5KVDC isolation/3KVDC isolation
Efficiency up to 86%	Operating temperature: -40°C to 105°C	Power density 2.0W/cm ³
UL 94V-0 package material	Footprint from 1.05cm ²	Industry standard pinout
Input voltage: 5V, 12V, 24V	Output voltage: 3.3V, 5V, 9V, 12V, 15V	Custom solutions available

SELECTION GUIDE

Part Number	Nominal Input Voltage	Output Voltage	Output Current(Max/Min)	Efficiency
	V	V	mA	%
TPL0503S	5	3.3	400/40	80
TPL0505S	5	5	400/40	77
TPL0509S	5	9	221/22.1	80
TPL0512S	5	12	168/16.8	83
TPL0515S	5	15	132/13.2	82
TPL0524S	5	24	83/8.3	80
TPL1205S	12	5	400/40	80
TPL1209S	12	9	221/22.1	84
TPL1212S	12	12	168/16.8	86
TPL1215S	12	15	132/13.2	85
TPL2412S	24	12	168/16.8	80
TPL2424S	24	24	83/8.3	80

Add suffix "P" for continuous short circuit protection, for example TPL0505SP.

Add suffix "/H" for 3KVDC isolation, for example TPL0505S/H.

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	5V input variants	4.5	5.0	5.5	V
Voltage range	12V input variants	11	12.0	13.3	V
Voltage range	24V input variants	22	24	26.4	V
Reflected ripple current	5V input variants		35		mA p-p
Reflected ripple current	12V input variants		40		mA p-p

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Max.	Units
Rated Power	TA= -40°C to 85°C		2.0	W
Voltage Set Point Accuracy	See tolerance envelope			
Line regulation	High VIN to low VIN		1.2	%/%
Load Regulation(10% load to rated load)	3.3/5V output variants		9	%
Load Regulation(10% load to rated load)	9V output variants		5	%
Load Regulation(10% load to rated load)	12V output variants		6	%
Load Regulation(10% load to rated load)	15V output variants		9	%
Load Regulation(10% load to rated load)	24V output variants		11	%

ABSOLUTE MAXIMUM RATINGS

Lead temperature 1.5mm from case for 10 seconds	300℃
Internal power dissipation	800mW
Input voltage V_{in} , TPL05XX types	7V
Input voltage V_{in} , TPL12XX types	15V
Input voltage V_{in} , TPL24XX types	28V

ISOLATION CHARACTERISTICS

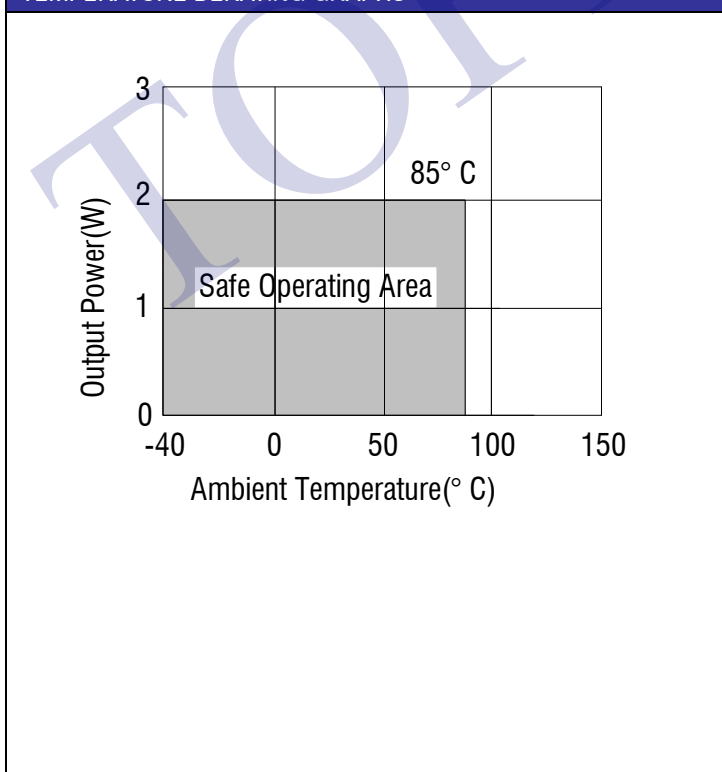
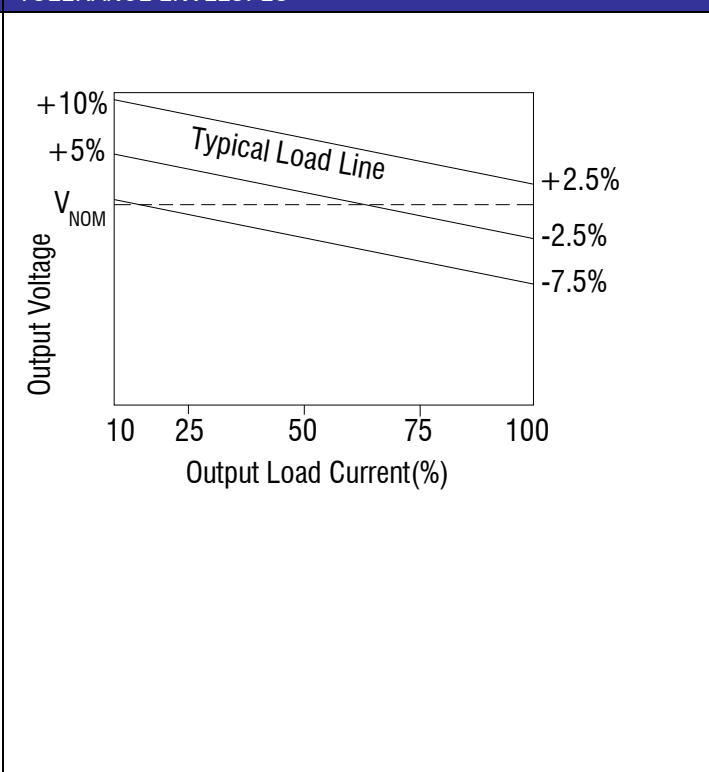
Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Tested for 1 second	1500		3000	VDC
Resistance	Viso= 500VDC	1			GΩ

GENERAL CHARACTERISTICS

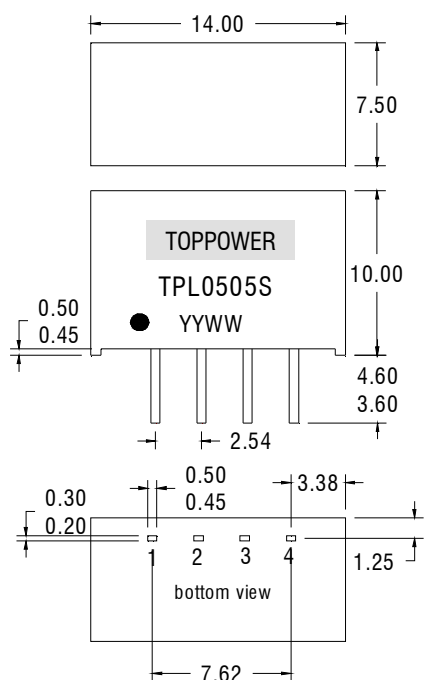
Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	5V input		95		kHz
Switching frequency	12V input		95		

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		105	℃
Storage		-50		130	℃
Case Temperature above ambient	5V output types			46	℃
	All other output types			38	℃
Cooling	Free air convection				

TEMPERATURE DERATING GRAPHS

TOLERANCE ENVELOPES


MECHANICAL DIMENSIONS

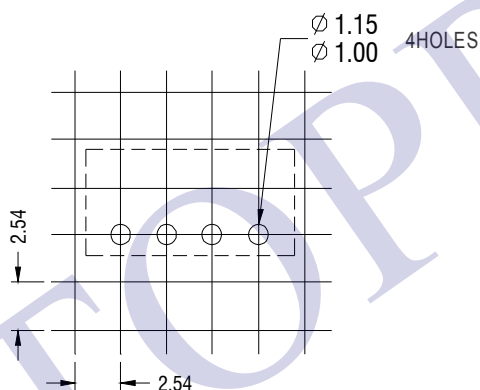


All dimensions in mm ± 0.25 mm. All pins on a 2.54mm pitch and within ± 0.25 mm of true position.

Weight: 2.0g

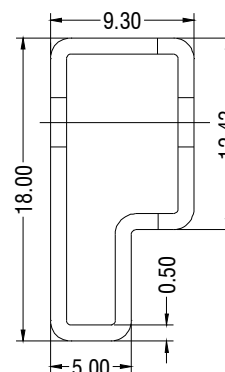
PIN CONNECTIONS-4PIN SIP	
Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout

RECOMMENDED FOOTPRINT DETAILS



Unless otherwise stated all dimensions mm ± 0.5 mm.

TUBE OUTLINE DIMENSIONS



Unless otherwise stated all dimensions in mm ± 0.5 mm.

Tube length : 520mm ± 2 mm.

Tube Quantity : 35

SOLDERING INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The series is backward compatible with Sn/Pb soldering systems