



Features

- ✧ For IF SAW filter
- ✧ High attenuation
- ✧ Single-ended operation
- ✧ Dual In-line Package
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter		Unit	Minimum	Typical	Maximum
Center Frequency		MHz	139.85	140	140.15
Insertion Loss		dB	-	26.6	30
3 dB Bandwidth		MHz	6	6.06	-
Passband Variation		dB	-	0.7	1.5
Absolute Delay		usec	-	3.33	4
Ultimate Rejection	f0±3.45MHz	dB	35	40	-
	f0±3.65MHz	dB	45	51	-
	f0±4.05MHz	dB	48	56	-
	f0±8.05MHz	dB	50	55	-
	f0±18.05MHz	dB	52	64	-
Material Temperature coefficient		KHz/°C	0.14		
Substrate Material		-	Qz		
Ambient Temperature		°C	25		
Operating Temperature Range		°C	-40	-	+85
Storage Temperature Range		°C	-45	-	+105
DC Voltage		V	0		
Input Power		dBm	-	-	10
ESD Class		-	1A		
Package Size		DIP3512 (35.0x12.8x4.7mm3)			

Notes:


- All specifications are based on the test circuit shown;
- In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
- This is the optimum impedance in order to achieve the performance show.



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBS140A11		
Rev. Date	2010-11-26		
Ver.	1.1	Page 1/3	


Matching Configuration

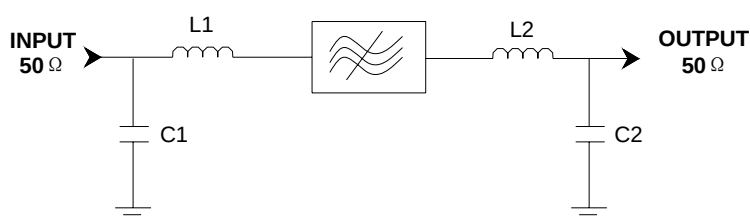

L1=120nH L2=82nH
C1=39pF C2=47pF
Source/Load Impedance=50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

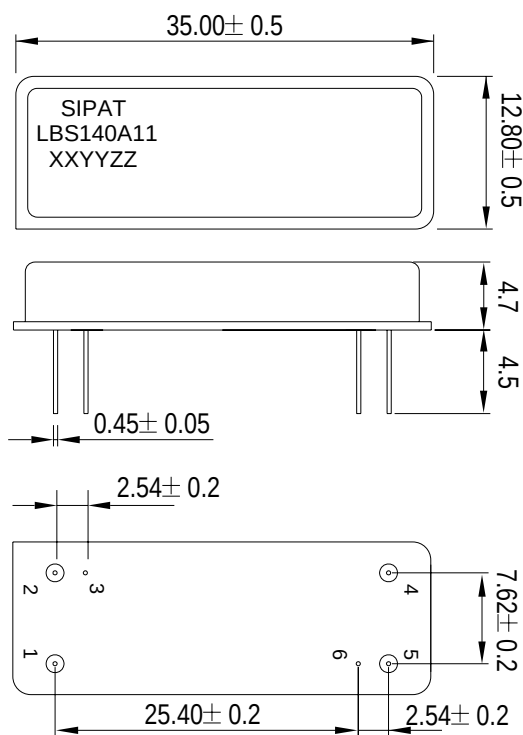

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBS140A11: Part Number
- 3) XXYY: Date(Year/month)
- 4) ZZ: Identified Code

Package: DIP3512

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBS140A11	
Rev. Date	2010-11-26	
Ver.	1.1	Page 2/3



Typical Performance


Frequency Respond

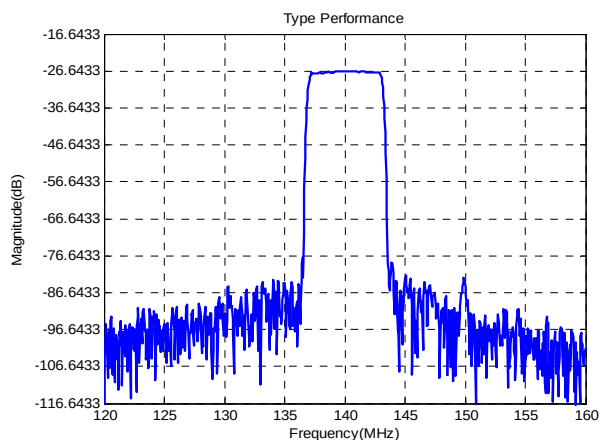

Horizontal: 5MHz/Div

Vertical: 10dB/Div


Passband Respond

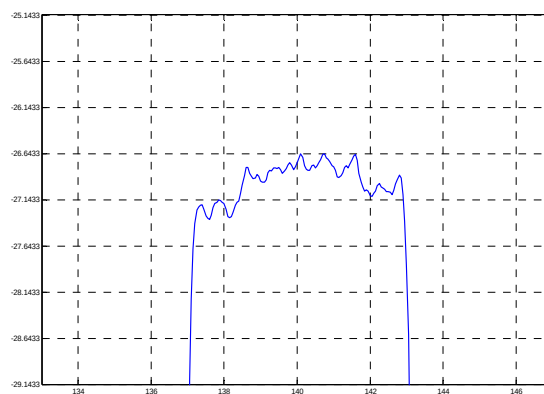

Horizontal: 2MHz/Div

Vertical: 0.5dB/Div


Group Delay Variation($f_0 \pm 3\text{MHz}$)

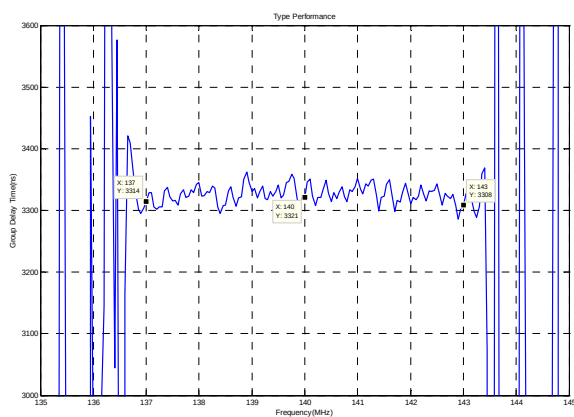

Horizontal: 1MHz/Div

Vertical: 100ns/Div


Phase Linearity($f_0 \pm 3\text{MHz}$)

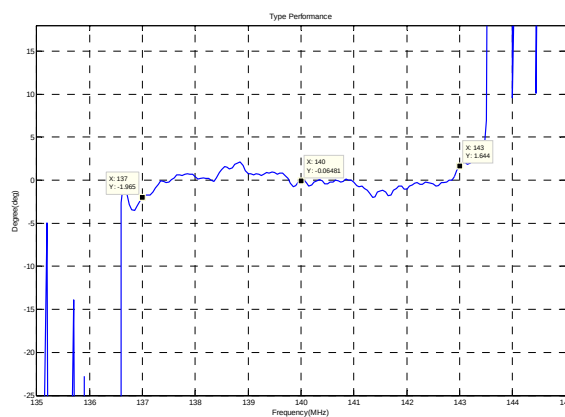


Horizontal: 1MHz/Div

Vertical: 5deg/Div

Smith Chart S11

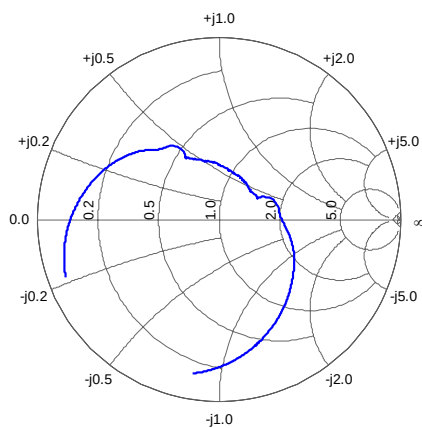

Smith Chart S22

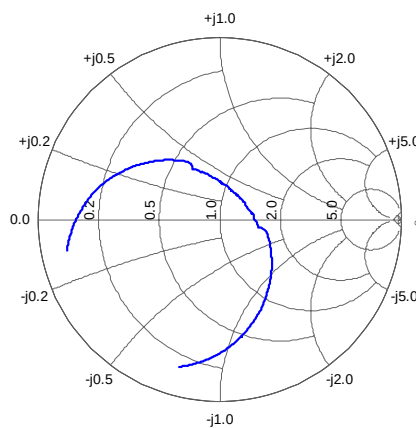

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBS140A11

Rev. Date

2010-11-26

Ver.

1.1

Page 3/3