



## Bus Termination Module FB9294B3

- Terminates bus, service bus, or both depending on model
- Module can be exchanged under voltage (hot swap)
- Active termination of the fieldbus
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage in Zone 1 (hot swap; be aware bus operation may be affected)


### Bus Termination Module



### Function

The device acts as a bus termination resistor to ensure signals are not reflected at the end of the line. It must be used in each last station of a bus line.

### Connection

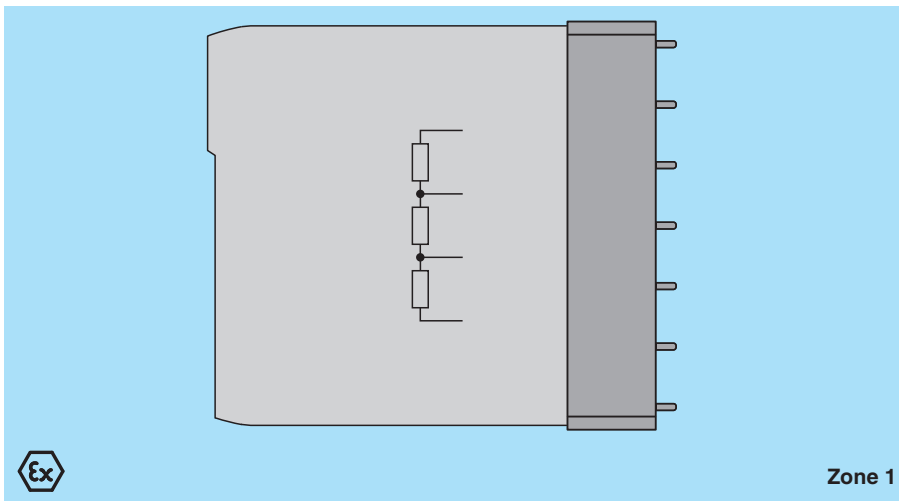

### Technical Data

#### Supply

Connection backplane bus

#### Directive conformity

Electromagnetic compatibility

Directive 2014/30/EU EN 61326-1

#### Conformity

Electromagnetic compatibility NE 21

Degree of protection IEC 60529

Environmental test EN 60068-2-14

Shock resistance EN 60068-2-27

Vibration resistance EN 60068-2-6

Damaging gas EN 60068-2-42

Relative humidity EN 60068-2-56

Release date: 2022-01-26 Date of issue: 2022-01-26 Filename: 287559\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com


 PEPPERL+FUCHS

**Technical Data**

<b>Ambient conditions</b>	
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	95 % non-condensing
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 50 m/s <sup>2</sup> , number of shock directions 6, number of shocks per direction 100
Vibration resistance	frequency range 5 ... 500 Hz, amplitude 5 ... 13.2 Hz ± 1.5 mm, 13.2 ... 100 Hz 1g, sweep rate 1 octave/min, duration 10 sweeps 5 Hz - 100 Hz - 5 Hz
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>	
Degree of protection	IP20 (module) , a separate housing is required acc. to the system description
Mass	approx. 350 g
Dimensions	28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)
<b>Data for application in connection with hazardous areas</b>	
EU-type examination certificate	PTB 97 ATEX 1074 U
Marking	⊕ II 2 G Ex d IIC
<b>Directive conformity</b>	
Directive 2014/34/EU	EN 60079-0:2009 EN 60079-1:2007 EN 60079-11:2007 EN 60079-26:2007 EN 61241-11:2006
<b>General information</b>	
System information	The module has to be mounted in appropriate backplanes (FB92**) in Zone 1, 2, or outside hazardous areas. Observe the corresponding EC-type examination certificate.
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Assembly**

Front view

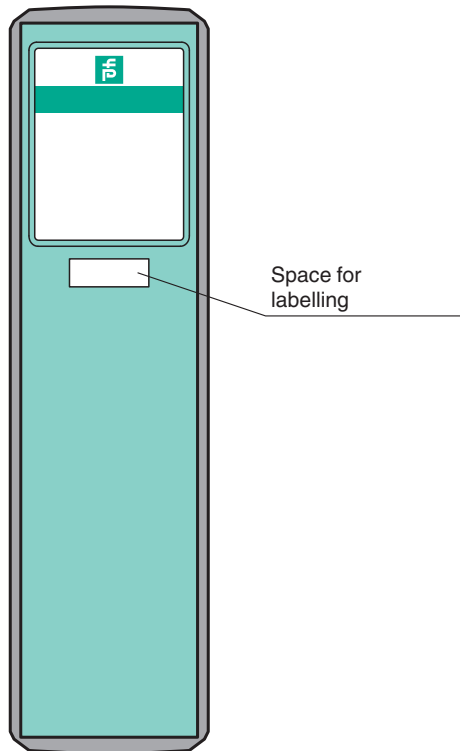

Release date: 2022-01-26 Date of issue: 2022-01-26 Filename: 287559\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

**Product Versions**

<b>Function</b>	<b>Type/Order no.</b>
Service bus termination	FB 9293 B
Bus termination	FB 9294 B
Bus and service bus termination	FB 9295 B

Release date: 2022-01-26 Date of issue: 2022-01-26 Filename: 287559\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com **PEPPERL+FUCHS**