


Compact total length of travel +15mm and improved operating feel



■ Typical Specifications

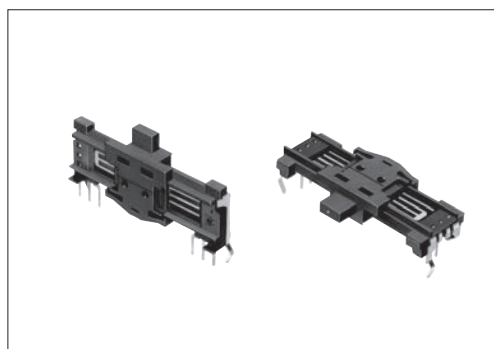

Items	Specifications
Total resistance tolerance	±20%
Maximum operating voltage	Please see P.402
Operating force	0.6 ^{+0.5} _{-0.4} N
Operating life	10,000 cycles
Operating temperature range	-25°C to +70°C

■ Product Line

Number of resistor elements	Direction of lever	Travel (mm)	Lever types	Length of lever (L1) (mm)	Total resistance (kΩ)	Resistance taper	Center detent	Tap	Minimum order unit (pcs.)		Products No.	Drawing No.			
									Japan	Export					
Single-unit	Vertical	15	C	9.5	100	1B	With	Without	2,900	5,800	RS15H113CA05	1			
					50		Without				RS15H111CA04				
		20		14.5	100		With				2,500		5,000	RS15H113C001	2
					50		Without		RS20H113C008						
		30		A	4.5		10		15A	2,000	4,000	RS20H111C009	3		
			100			1B	Without		2,750	5,500	RS30H111A00D				
	10	15A	RS15H11AA04M								7				
	250	1B	Without									2,750	5,500	RS15H11AA008	
	10					With	RS15H11AA00G								
	5					Without	RS20H11AA02T		8						
	50						Without			RS20H11CA00B					
	10						Without			RS20H11AA01U					
	50						Without			RS20H11AA019					
	Horizontal	20	4.5			1B	Without		2,750	5,500	RS20H11AA015	9			
											10		Without	RS30H11AA009	
											50		Without	RS30H11AA00G	
											200		Without	RS30H11AAA0B	
											5		Without	RS30H11AA00P	
				9.5	Without						RS30H11AAA02				
	Dual-unit	Vertical	15	C	4.5	10	15A		With	Without	2,900	5,800	RS15H121A009	4	
20			9.5		100	1B	2,500						5,000	RS20H123A01C	5
30			4.5		10									Without	2,000
Horizontal		15	4.5	50	Without	2,750	5,500		RS15H12AA00F		10				
				250					RS15H12AA009						
		20	14.5	50					3B		RS20H12AC002	11			
		30	A	4.5					50		15A	1,980	3,960	RS30H12AA003	12

Note

Other varieties are also available. Refer to "Other Specifications" (P.402).

Refer to P.402 for other specifications.
Refer to P.402 for details of lever types.
Refer to P.403 for ordering products not listed.
Refer to P.426 for soldering conditions.

Packing Specifications

Tray

Travel (mm)	Direction of lever	Number of packages (pcs.)		Export package measurements (mm)
		1 case /Japan	1 case /export packing	
15	Vertical	2,900	5,800	378×514×512
	Horizontal	2,750	5,500	374×508×408
20	Vertical	2,500	5,000	378×514×512
	Horizontal	2,750	5,500	374×508×408
30	Vertical	2,000	4,000	378×514×512
	Horizontal	1,980	3,960	374×508×408

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
1	L_1 9.5 14.5	L : Lug terminal
2		L : Lug terminal
3		L : Lug terminal

The length of Lever (L_1) can be customized. Refer to P.402 for details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
4		
5		
6		
7		
8		

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)						
9	<table border="1" style="margin-top: 10px;"> <thead> <tr> <th>L₁</th> <th>4.5</th> <th>9.5</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	L ₁	4.5	9.5				L : Lug terminal
L ₁	4.5	9.5						
10	<table border="1" style="margin-top: 10px;"> <thead> <tr> <th>L₁</th> <th>4.5(L₁)</th> <th>L₁+0.5</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	L ₁	4.5(L ₁)	L ₁ +0.5				L : Lug terminal
L ₁	4.5(L ₁)	L ₁ +0.5						
11	<table border="1" style="margin-top: 10px;"> <thead> <tr> <th>L₁</th> <th>14.5(L₁)</th> <th>L₁+0.5</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	L ₁	14.5(L ₁)	L ₁ +0.5				L : Lug terminal
L ₁	14.5(L ₁)	L ₁ +0.5						
12	<table border="1" style="margin-top: 10px;"> <thead> <tr> <th>L₁</th> <th>4.5(L₁)</th> <th>L₁+0.5</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>	L ₁	4.5(L ₁)	L ₁ +0.5				L : Lug terminal
L ₁	4.5(L ₁)	L ₁ +0.5						

The length of Lever (L₁) can be customized. Refer to P.402 for details.

Slim Slide™ (Slim 4) / Other Specifications

In addition to the products listed, we can accommodate the follow specifications.

Travel Distance Variety

Travel (mm)	15	20	30
-------------	----	----	----

Total Resistance Variety

Total resistance (k Ω)	5	10	20	50	100	200	250
--------------------------------	---	----	----	----	-----	-----	-----

Resistance Taper

Resistance taper	15A	1B	3B
------------------	-----	----	----

Note

Also compatible to DC (10V DC). (Excluding tapped types)


Rated Power

Travel	Resistance taper	
	15A	1B, 3B
15mm	0.012W	0.025W
20mm	0.025W	0.05W
30mm	0.05W	0.1W

Maximum Operating Voltage

Travel	Resistance taper	
	15A	1B, 3B
15mm	50V AC, 10V DC	100V AC, 10V DC
20mm		
30mm	150V AC, 10V DC	200V AC, 10V DC

Terminal Layout / Circuit Diagram (Viewed from the Mounting Side)

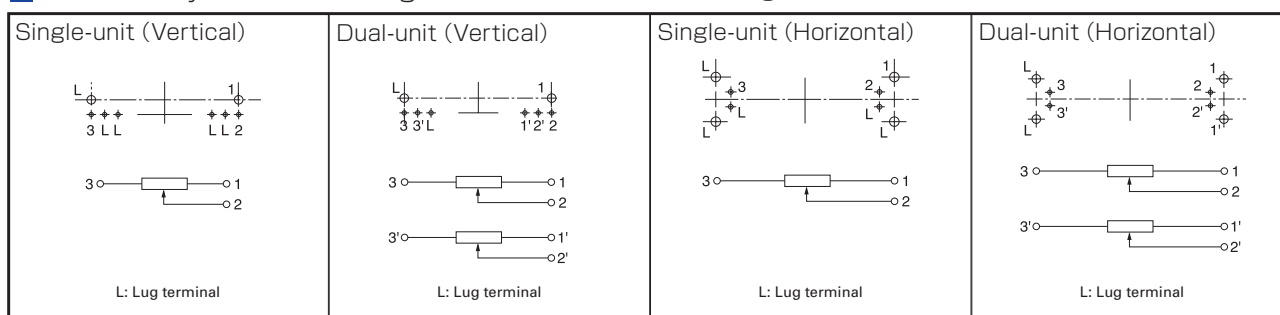

Lever Types

Unit:mm

Configuration code	A		C		D	
Dimensions						
Length L ₁	4.5	9.5	9.5	14.5	9.5	14.5

Corresponding Specification

Tap	Available, (Only the center-positioned)
-----	--

Notes

- The color of the D-type lever is black. Please specify the required color for markers from red, green, orange and white.
- Marked are specifications recommended by Alps.

When ordering product varieties that are not listed, specify referring to the examples below.

Sample Part Number

R S 3 0 H 1 1 1 - A 0 9 5 - B 1 0 3

Travel (mm)

15, 20, 30

Number of resistor elements

Single-unit	1
Dual-unit	2

Direction of lever and presence of center detent

Code	Direction of lever	Center detent
1	Vertical	Without
3		With
A	Horizontal	Without
C		With

Lever types

Code
A
C
D

Length of lever

Code	Length L ₁ (mm)
045	4.5
095	9.5
145	14.5


Resistance taper

Code	Resistance taper
A	15A
B	1B
V	3B

B: For tone & general V: For vol.

Total resistance

Code	Total resistance (k Ω)	Code	Total resistance (k Ω)
502	5	104	100
103	10	204	200
203	20	254	250
503	50	—	—

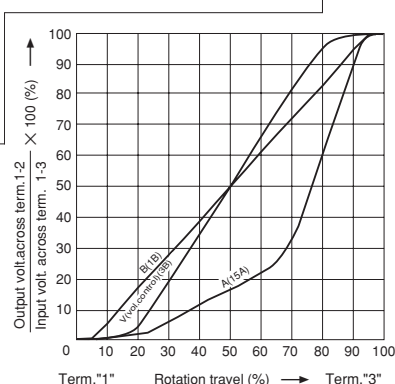

Note

Marked are specifications recommended by Alps.

Slide Potentiometers

List of Varieties

Type		Standard Type				Master Type	
Series		Super Slide™	Slim Slide™ (Slim4)		Compact Reflow Type		K Fader
		RS □□ 1	RS □□ H		RS08U		RS □□ K
		Single-unit/Dual-unit	Single-unit/Dual-unit		Single-unit		Single-unit/Dual-unit
Photo							
Travel (mm)		15, 20, 30, 45, 60	15, 20, 30		8		60, 100
Direction of lever		Vertical		Horizontal	Vertical	Horizontal	Vertical
Lever material		Metal / Resin	Resin				Metal
Operating temperature range		-25℃ to +70℃			-10℃ to +70℃		-10℃ to +60℃
Operating life		15,000 cycles	10,000 cycles				100,000 cycles (Standard) 300,000 cycles (CP)
Available for automotive use		○	—	—	—		—
Life cycle (availability)							
Electrical performance	Total resistance (k Ω)	10, 20, 50, 100, 200	5, 10, 20, 50, 100, 200, 250		10		10, 50, 100(Standard) 10 (CP)
	Resistance taper	10A, 15A, 1B, 3B, 4B	15A, 1B, 3B		1B		15A, 1B
	Rated Power	Please see P.395	Please see P.402		0.025W		0.25W
	Insulation resistance	100MΩ min. 250V DC	Dual-unit: 100MΩ min. 250V DC		100MΩ min. 100V DC		100MΩ min. 250V DC
	Voltage proof	300V AC for 1 minute	Dual-unit: 300V AC for 1 minute		100V AC for 1 minute		250V AC for 1 minute
	Center-taps	Without / With			Without		
Mechanical performance	Operating force	0.3 to 2.5N	0.6 ^{+0.5} _{-0.4} N		0.17±0.15N		Please see P.408
	Center detent	Without / With			Without		
	Stopper strength	50N	30N		5N		100N
	Lever push-pull strength	50N	30N		5N		100N
	Lever wobble (mm) ※ Both sides	$\frac{2(2 \times L)}{20}$	1.6 max.		—		$\frac{2(2 \times L)}{25}$
	Detent slip-out force	Operating force + (0.2 to 2N)	Operating force +0.3 ^{+0.5} _{-0.25} N		—		—
	Lever deviation (mm) ※ One side	0.5 max.	—	—	—		0.5 max.
Terminal style		Insertion			Reflow		Lead (Standard) Connector (CP)
Page		389	398		404		405

Slide Potentiometers Soldering Conditions	426
Potentiometer Cautions	427
Potentiometers Measurement and Test Methods	429
Potentiometers Resistance Taper	431

Notes

1. "L" in the "Lever Wobble" column of the above table indicates the length of lever.
2. 「RS □□」

3. ○ Indicates applicability to some products in the series.

Reference for Manual Soldering


Series	Tip temperature	Duration of Soldering time	No. of solders
RS□□1, RS□□H, RS08U, RS□□K (Standard), RS□□N, RS□□N11S, RS6011□P, RS□□N1□M, RSA0K1□V (Motor terminal)	350°C max.	3s max.	1 time

Reference for Dip Soldering

Series	Preheating		Dip soldering		Number of soldering
	Soldering surface temperature	Heating time	Soldering temperature	Soldering time	
RS□□1, RS□□H, RS□□N, RS□□N11S, RS6011□P, RS□□N1□M	100°C max.	1 min. max.	260°C	5s max.	1 time

Example of Reflow Soldering Condition

Temperature profile

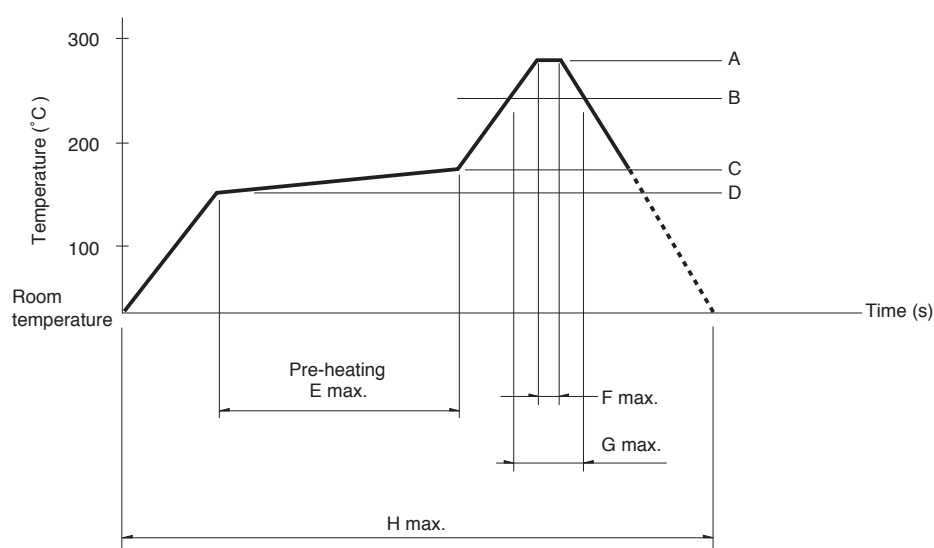

Series	A	B	C	D	E	F	G	H	No. of reflows
RS08U	250°C	200°C	150°C	150°C	2 min.	3s	40s	4 min.	1 time

Notes

1. When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
2. The temperatures given above are the maximum temperatures at the terminals of the potentiometer when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the potentiometer may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the potentiometer does not rise to 250°C or greater.
3. Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.