
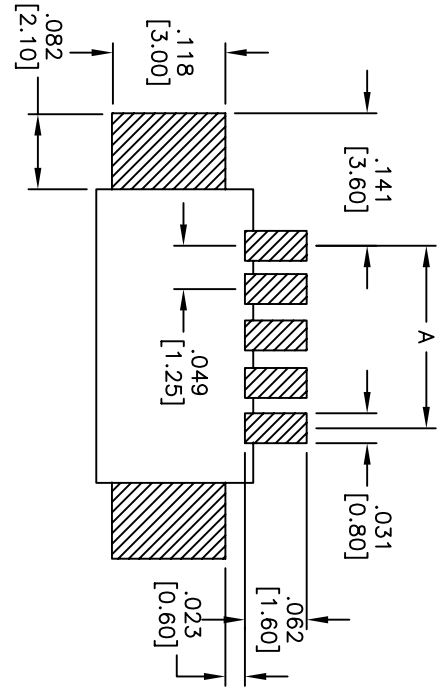
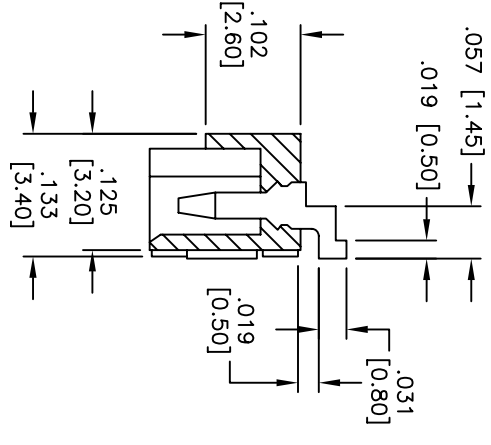
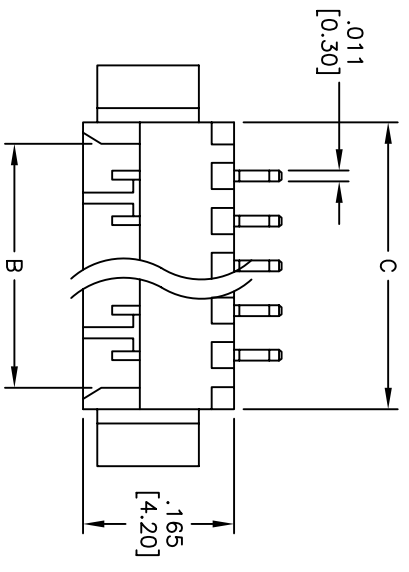


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

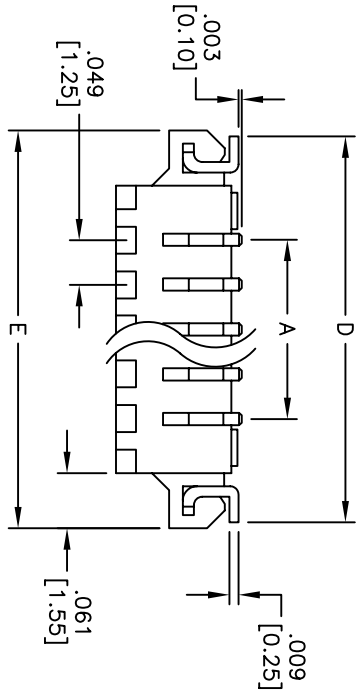

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 46, rated UL 94V-0  
 Insulator color: Ivory  
 Contacts: Brass  
**Plating:**  
 Tin over Nickel underplate overall

**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -40°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 260°C. for 5 sec.

A=.049 [1.25] X NO. OF SPACES  
 B=.049 [1.25] X NO. OF SPACES X+.070 [1.80]  
 C=.049 [1.25] X NO. OF SPACES X+.118 [3.00]  
 D=.049 [1.25] X NO. OF SPACES X+.236 [6.00]  
 E=.049 [1.25] X NO. OF SPACES X+.251 [6.40]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS

DATE
01/17/07

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX 1.25mm WAFER 90° SMT

DRAWN	CHECKED	APPROVED	SIZE	PART NO.	SCALE	SHEET	REV.
BW			X	125SH-B-XX-TR-SMT	NTS	1 OF 1	

