
SERIES EG1381 SWITCHES

SLIDE SWITCHES

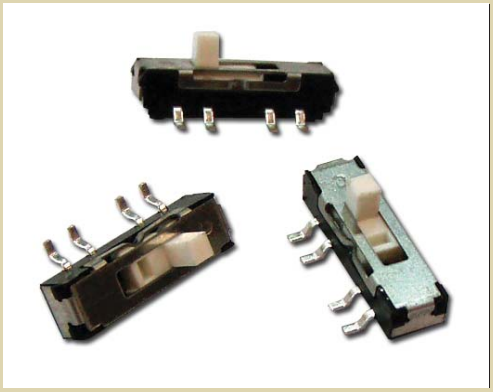

MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	250 +/- 100 gf to center position 300 +/- 150 gf from center position
Travel:	2.0 +/- 0.1mm each position

ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 6VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 500VDC)
Dielectric Strength:	500VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10ºC to +60ºC
Storage Temperature:	-20ºC to +70ºC

FEATURES & BENEFITS


Tape & Reel Packaging
3-position
Surface Mount
Sub-miniature

APPLICATIONS / MARKETS


Computer Servers/peripherals
Consumer electronics
Instrumentation
Test & measurement

HOW TO ORDER:


SERIES	MODEL	ACTUATOR
EG	1381	A = 2.0mm



SCHEMATIC

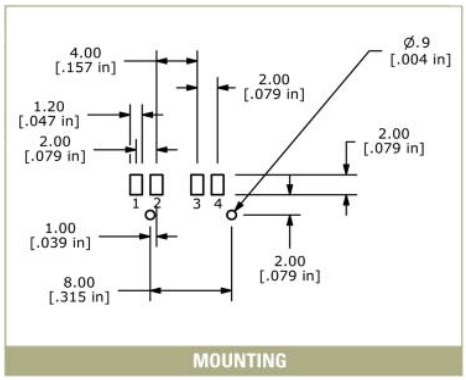

MOUNTING

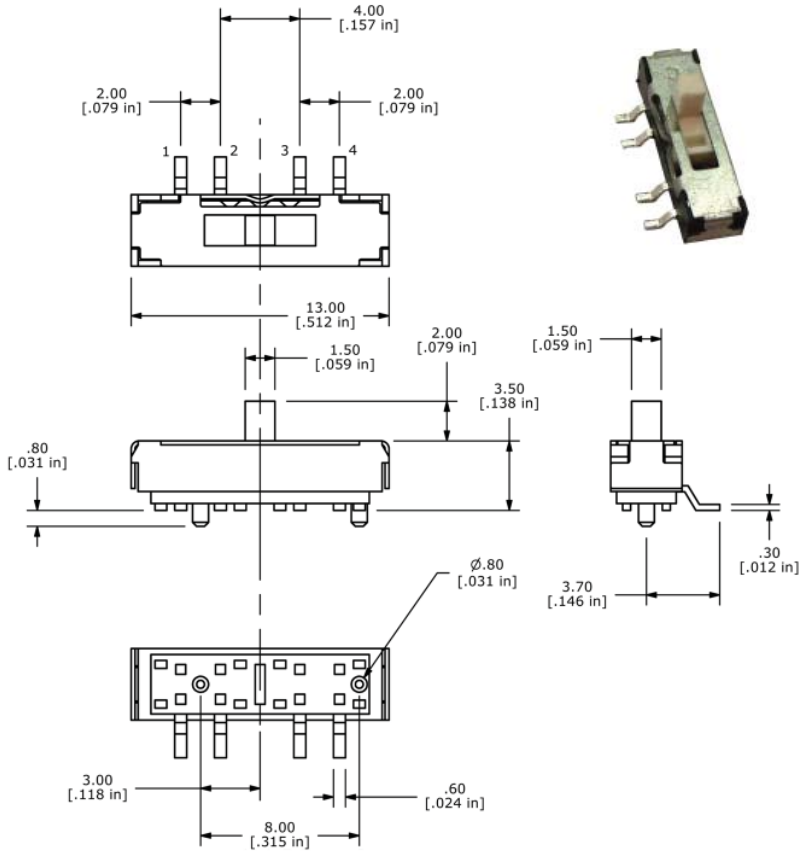

www.e-switch.com
email: info@e-switch.com

7153 NORTHLAND DRIVE NORTH
MINNEAPOLIS, MN 55428

PHONE: 800-867-2717
FAX: 763-531-8235