Advanced Power Electronics Corp.

P-CHANNEL ENHANCEMENT MODE POWER MOSFET

- ▼ **Simple Drive Requirement**
- ▼ **2.5V Gate Drive Capability**
- ▼ **Fast Switching**



BV_{DSS}	-20V
$R_{DS(ON)}$	52mΩ
I_D	-18A

Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.



TO-252(H)

The TO-252 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters. The through-hole version (AP20P02J) are available for low-profile applications.



TO-251(J)

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	- 20	V
V_{GS}	Gate-Source Voltage	± 12	V
I_D@T_C=25℃	Continuous Drain Current, V_{GS} @ 10V	-18	A
I_D@T_C=100℃	Continuous Drain Current, V_{GS} @ 10V	-14	A
I_{DM}	Pulsed Drain Current[1]	-50	A
P_D@T_C=25℃	Total Power Dissipation	31.25	W
	Linear Derating Factor	0.25	W/℃
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter		Value	Unit
Rthj-c	Thermal Resistance Junction-case	Max.	4.0	℃/W
Rthj-a	Thermal Resistance Junction-ambient	Max.	110	℃/W

Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=-250uA	-20	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25℃, I_D=-1mA	-	-0.03	-	V/℃
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=-4.5V, I_D=-8A	-	-	52	mΩ
		V_{GS}=-2.5V, I_D=-5A	-	-	85	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=-250uA	-0.5	-	-	V
g_{fs}	Forward Transconductance	V_{DS}=-10V, I_D=-8A	-	15	-	S
I_{DSS}	Drain-Source Leakage Current (T_j=25°C)	V_{DS}=-20V, V_{GS}=0V	-	-	-1	uA
	Drain-Source Leakage Current (T_j=150°C)	V_{DS}=-16V, V_{GS}=0V	-	-	-25	uA
I_{GSS}	Gate-Source Leakage	V_{GS}= ± 12	-	-	±100	nA
Q_g	Total Gate Charge[2]	I_D=-8A	-	13.5	-	nC
Q_{gs}	Gate-Source Charge	V_{DS}=-16V	-	2.1	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	V_{GS}=-4.5V	-	1.6	-	nC
$t_{d(on)}$	Turn-on Delay Time[2]	V_{DS}=-10V	-	12	-	ns
t_r	Rise Time	I_D=-8A	-	20	-	ns
$t_{d(off)}$	Turn-off Delay Time	R_G=3.3Ω,V_{GS}=-4.5V	-	45	-	ns
t_f	Fall Time	R_D=1.25Ω	-	27	-	ns
C_{iss}	Input Capacitance	V_{GS}=0V	-	1050	-	pF
C_{oss}	Output Capacitance	V_{DS}=-16V	-	410	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	110	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
I_S	Continuous Source Current (Body Diode)	V_D=V_G=0V , V_S=-1.2V	-	-	-10	A
I_{SM}	Pulsed Source Current (Body Diode)[1]		-	-	-50	A
V_{SD}	Forward On Voltage[2]	T_j=25℃, I_S=-10A, V_{GS}=0V	-	-	-1.2	V

Notes:

1.Pulse width limited by safe operating area.

2.Pulse width ≤300us , duty cycle ≤2%.

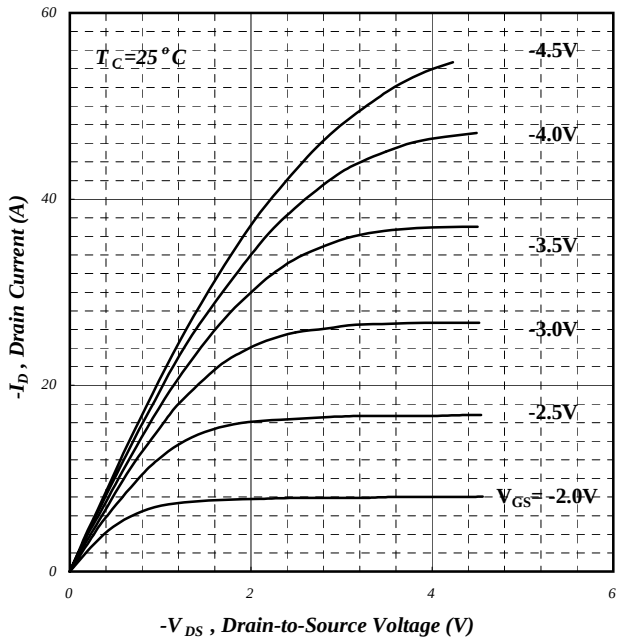

Fig 1. Typical Output Characteristics

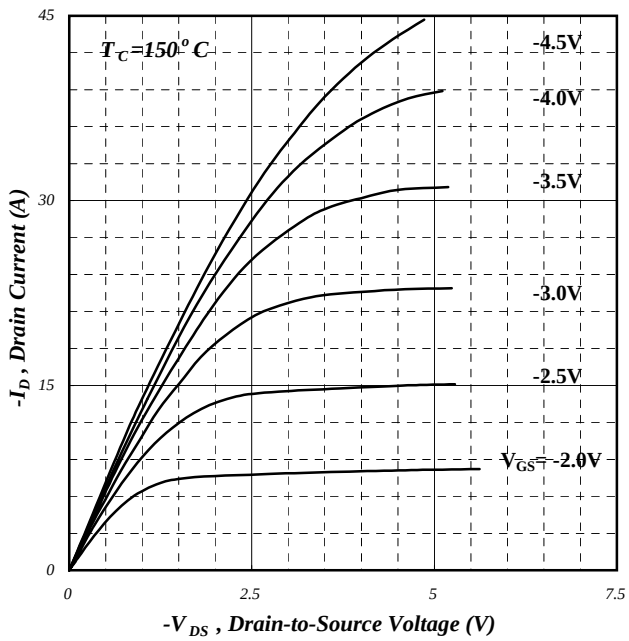

Fig 2. Typical Output Characteristics

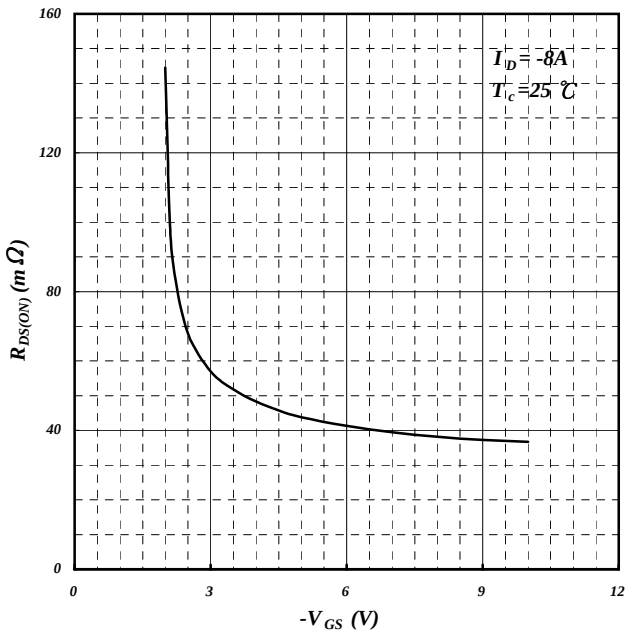

Fig 3. On-Resistance v.s. Gate Voltage

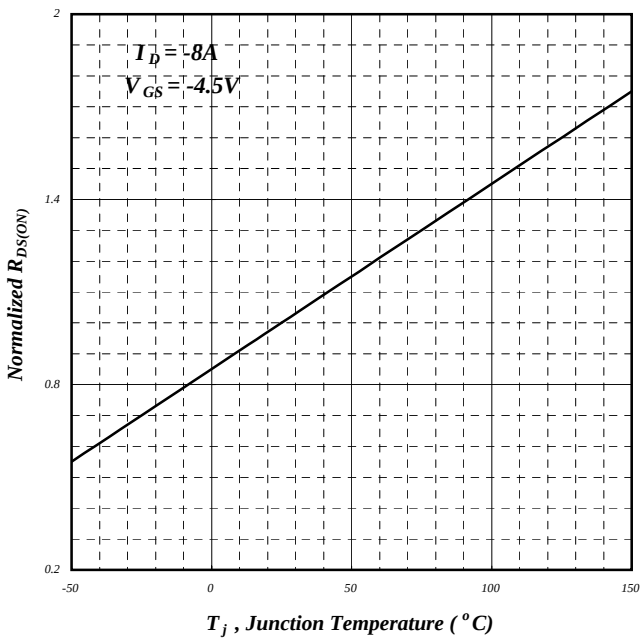

Fig 4. Normalized On-Resistance v.s. Junction Temperature

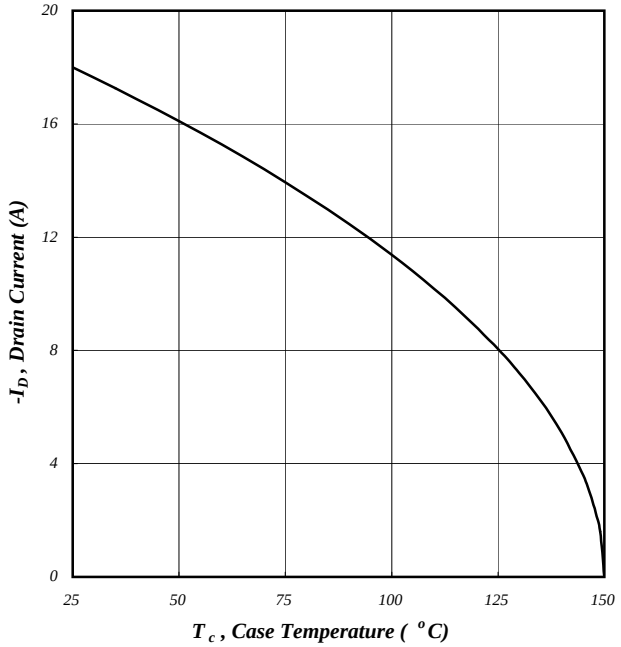

Fig 5. Maximum Drain Current v.s. Case Temperature

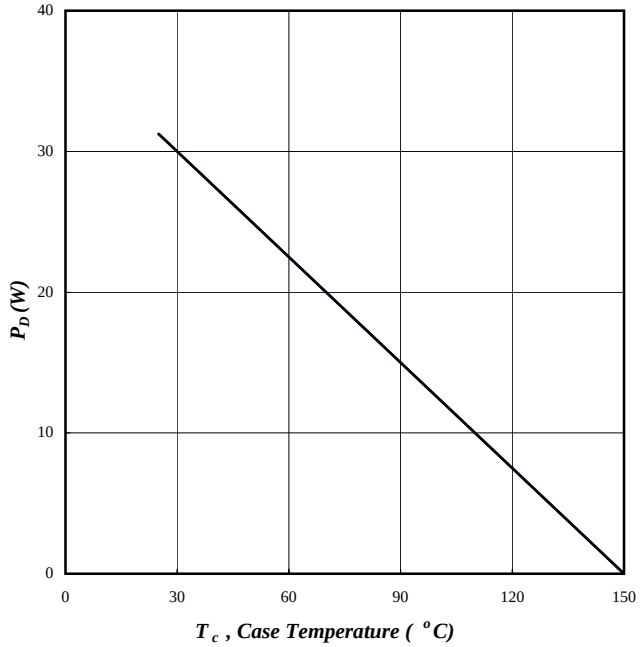

Fig 6. Typical Power Dissipation

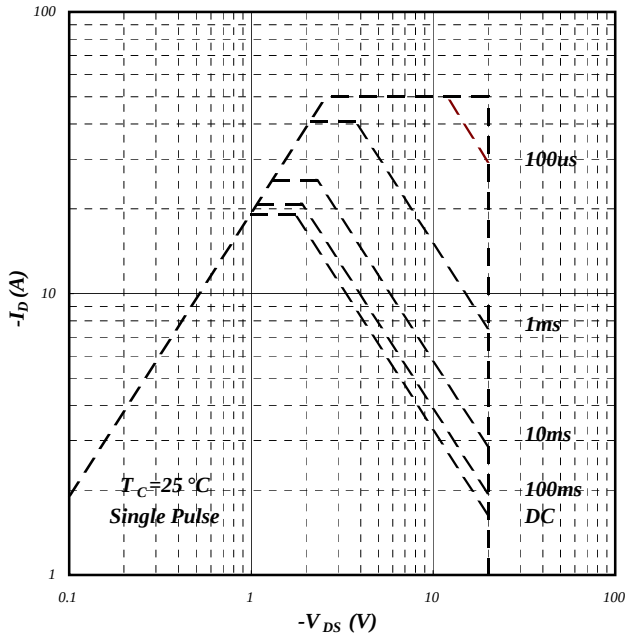

Fig 7. Maximum Safe Operating Area

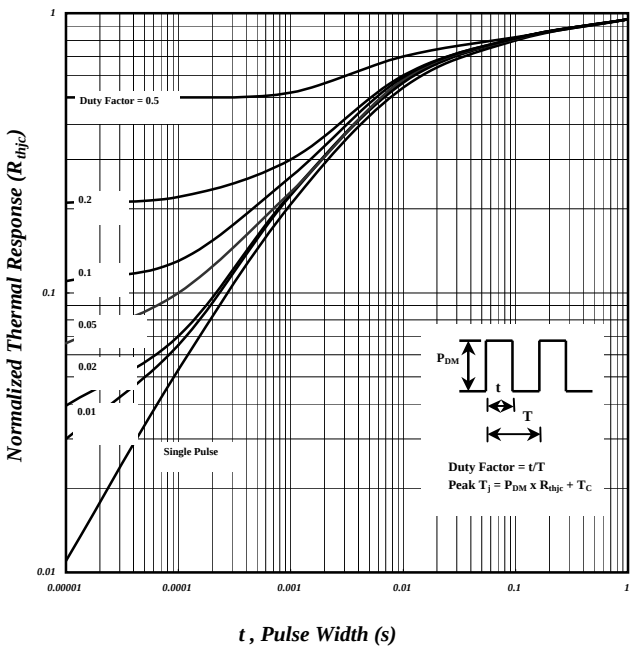

Fig 8. Effective Transient Thermal Impedance

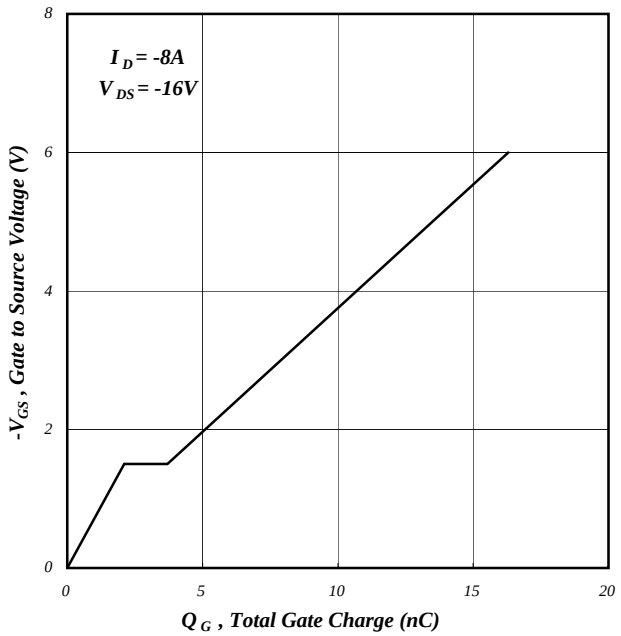

Fig 9. Gate Charge Characteristics

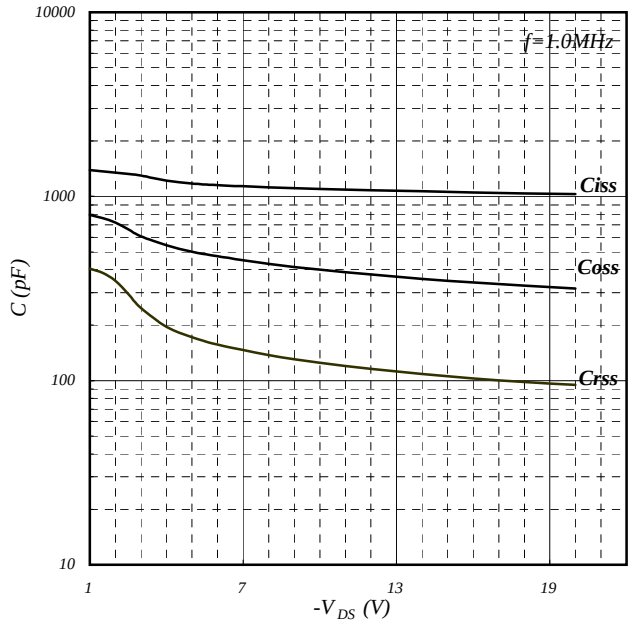

Fig 10. Typical Capacitance Characteristics

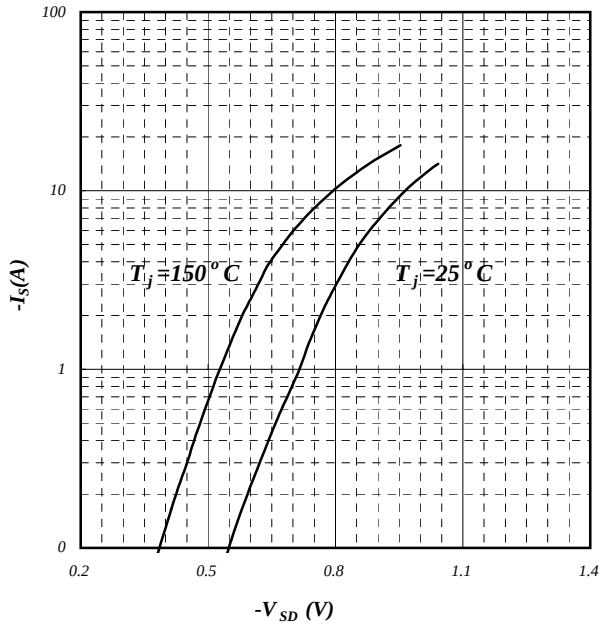

Fig 11. Forward Characteristic of Reverse Diode

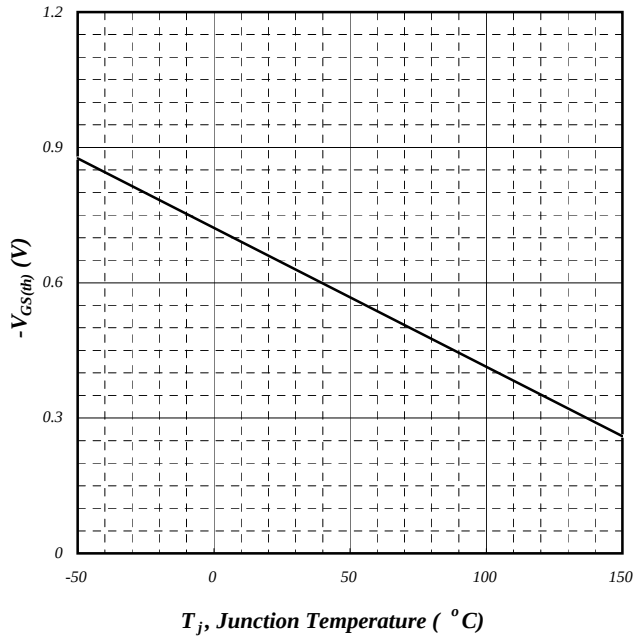

Fig 12. Gate Threshold Voltage v.s. Junction Temperature

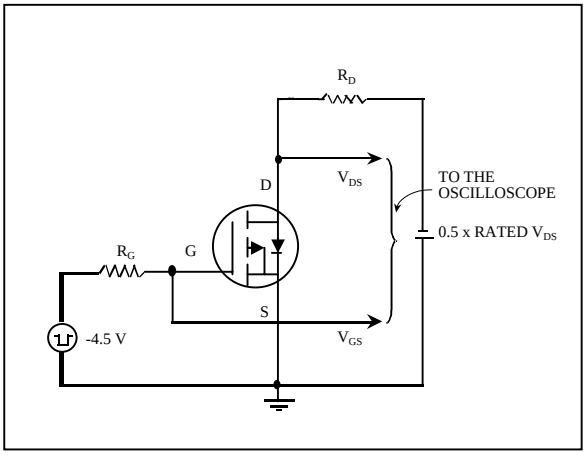

Fig 13. Switching Time Circuit

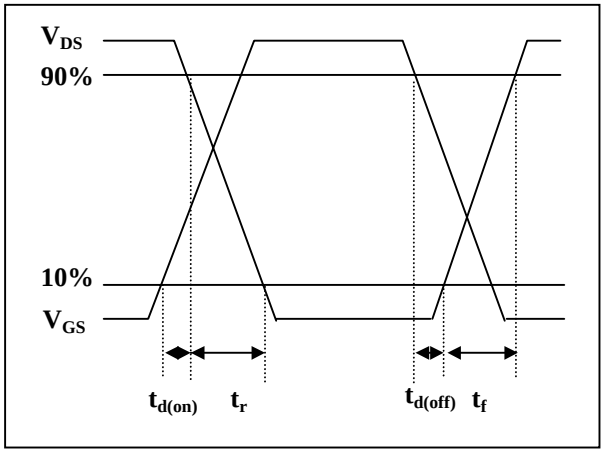

Fig 14. Switching Time Waveform

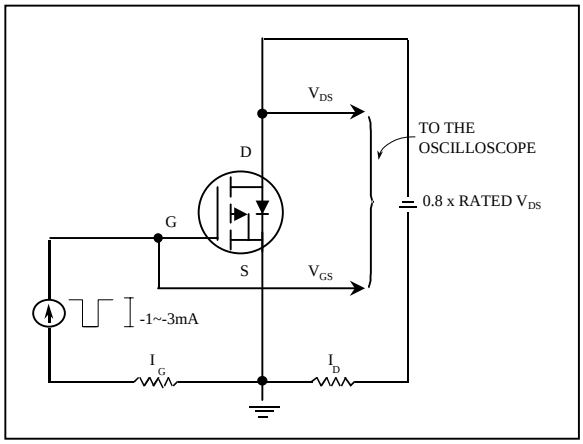

Fig 15. Gate Charge Circuit

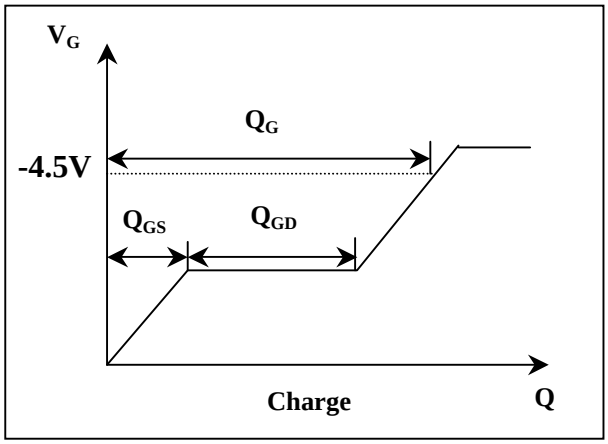

Fig 16. Gate Charge Waveform