SGS-THOMSON MICROELECTRONICS


BUT232V

NPN TRANSISTOR POWER MODULE

- HIGH CURRENT POWER BIPOLAR MODULE
- VERY LOW R_{th} JUNCTION CASE
- SPECIFIED ACCIDENTAL OVERLOAD AREAS
- ISOLATED CASE (2500V RMS)
- EASY TO MOUNT
- LOW INTERNAL PARASITIC INDUCTANCE


INDUSTRIAL APPLICATIONS:

- MOTOR CONTROL
- SMPS & UPS
- DC/DC & DC/AC CONVERTERS



ISOTOP

INTERNAL SCHEMATIC DIAGRAM



SC04840

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CEV}	Collector-Emitter Voltage (V_{BE} = -5 V)	400	V
$V_{CEO(sus)}$	Collector-Emitter Voltage (I_B = 0)	300	V
V_{EBO}	Emitter-Base Voltage (I_C = 0)	7	V
I_C	Collector Current	140	A
I_{CM}	Collector Peak Current (t_p = 10 ms)	210	A
I_B	Base Current	28	A
I_{BM}	Base Peak Current (t_p = 10 ms)	42	A
P_{tot}	Total Dissipation at T_c = 25 °C	300	W
T_{stg}	Storage Temperature	-55 to 150	°C
T_j	Max. Operating Junction Temperature	150	°C
V_{ISO}	Insulation Withstand Voltage (AC-RMS)	2500	°C

THERMAL DATA


$R_{thj\text{-}case}$	Thermal Resistance Junction-case	Max	0.41	°C/W
$R_{thc\text{-}h}$	Thermal Resistance Case-heatsink With Conductive Grease Applied	Max	0.05	°C/W

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CER}	Collector Cut-off Current (R_{BE} = 5 Ω)	V_{CE} = V_{CEV} V_{CE} = V_{CEV} T_j = 100 °C			1 5	mA mA
I_{CEV}	Collector Cut-off Current (V_{BE} = -1.5)	V_{CE} = V_{CEV} V_{CE} = V_{CEV} T_j = 100 °C			1 4	mA mA
I_{EBO}	Emitter Cut-off Current (I_C = 0)	V_{EB} = 5 V			1	mA
$V_{CEO(SUS)}$*	Collector-Emitter Sustaining Voltage	I_C = 0.2 A L = 25 mH V_{clamp} = 300 V	300			V
h_{FE}*	DC Current Gain	I_C = 70 A V_{CE} = 5 V		17		
$V_{CE(sat)}$*	Collector-Emitter Saturation Voltage	I_C = 35 A I_B = 1.75 A I_C = 35 A I_B = 1.75 A T_j = 100 °C I_C = 70 A I_B = 7 A I_C = 70 A I_B = 7 A T_j = 100 °C		0.5 0.7 0.5 0.9	 1.9 1.9	V V V V
$V_{BE(sat)}$*	Base-Emitter Saturation Voltage	I_C = 70 A I_B = 7 A I_C = 70 A I_B = 7 A T_j = 100 °C		1.1 1	 1.3	V V
dI_C/dt	Rate of Rise of On-state Collector	V_{CC} = 300 V R_C = 0 t_p = 3 µs I_{B1} = 10 A T_j = 100 °C	120	190		A/µs
V_{CE}(3 µs)	Collector-Emitter Dynamic Voltage	V_{CC} = 200 V R_C = 3.25 Ω I_{B1} = 6.4 A T_j = 100 °C		2.5	4	V
V_{CE}(5 µs)	Collector-Emitter Dynamic Voltage	V_{CC} = 200 V R_C = 3.25 Ω I_{B1} = 6.4 A T_j = 100 °C		1.4	2.5	V
t_s t_f t_c	Storage Time Fall Time Cross-over Time	I_C = 70 A V_{CC} = 250 V V_{BB} = -5 V R_{BB} = 0.6 Ω V_{clamp} = 300 V I_{B1} = 7 A L = 0.3 mH T_j = 100 °C		3 0.25 0.6	5 0.4 0.9	µs µs µs
V_{CEW}	Maximum Collector Emitter Voltage Without Snubber	I_{CWoff} = 105 A I_{B1} = 7 A V_{BB} = -5 V V_{CC} = 50 V L = 42 µH R_{BB} = 0.6 Ω T_j = 125 °C	300			V

* Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %


Safe Operating Areas

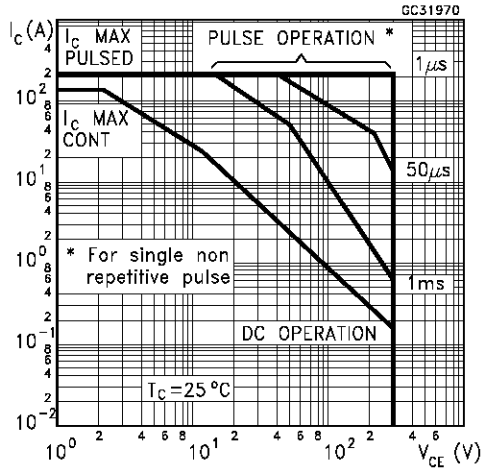


Thermal Impedance

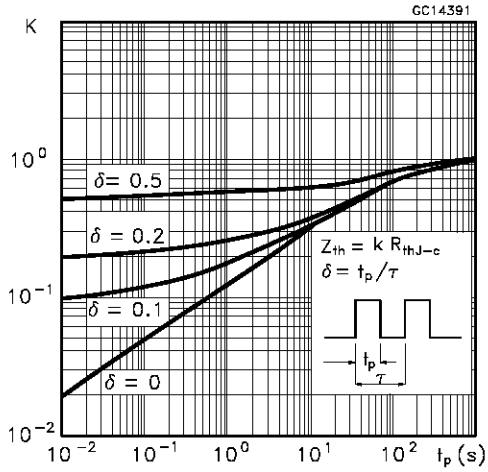


Derating Curve

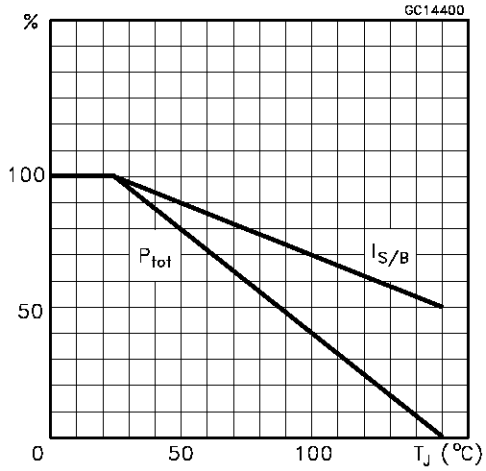


Collector-emitter Voltage Versus base-emitter Resistance

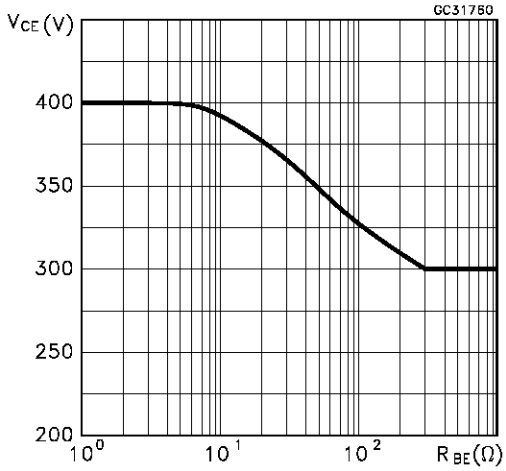


Collector Emitter Saturation Voltage

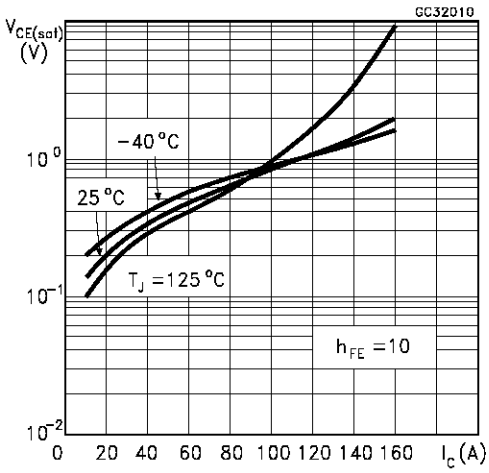


Base-Emitter Saturation Voltage

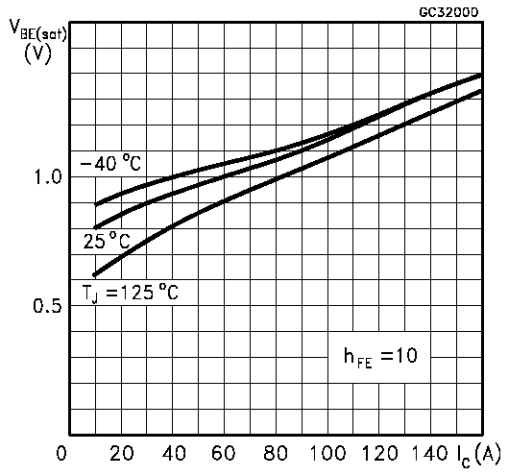


Reverse Biased SOA

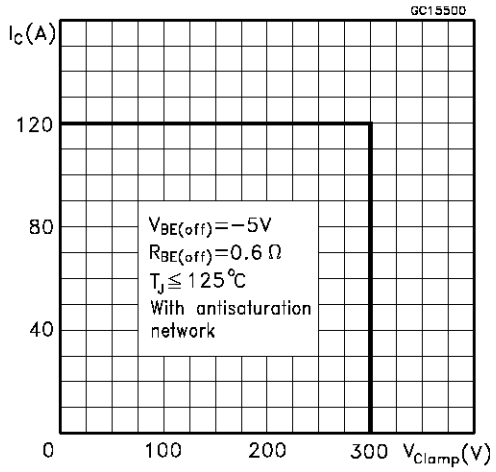


Foward Biased SOA

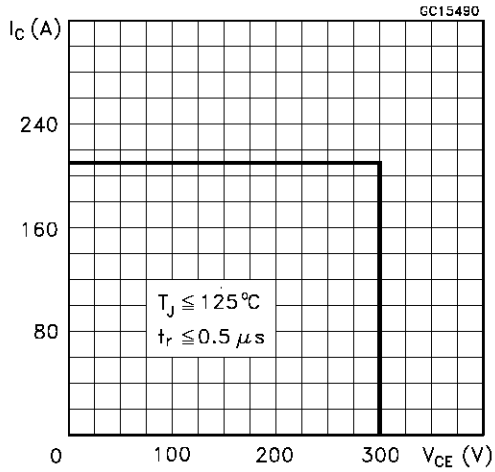


Reverse Biased AOA

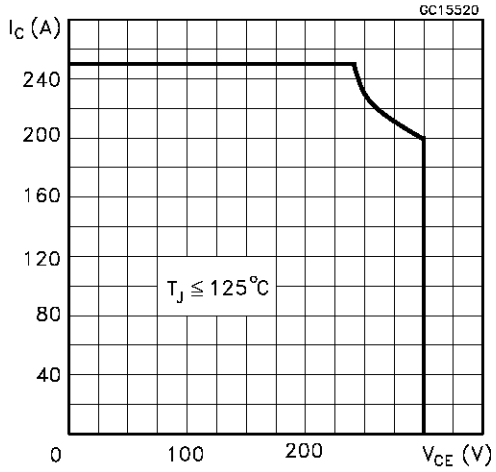


Forward Biased AOA

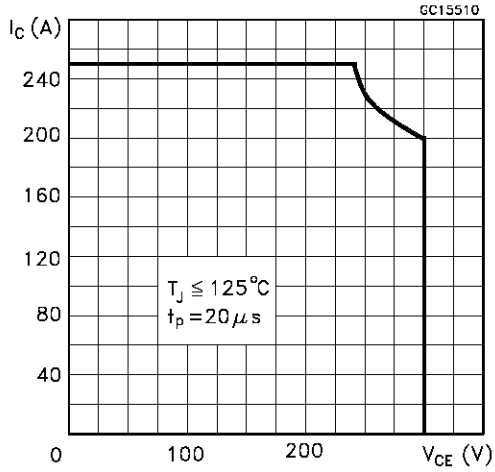


Switching Times Inductive Load

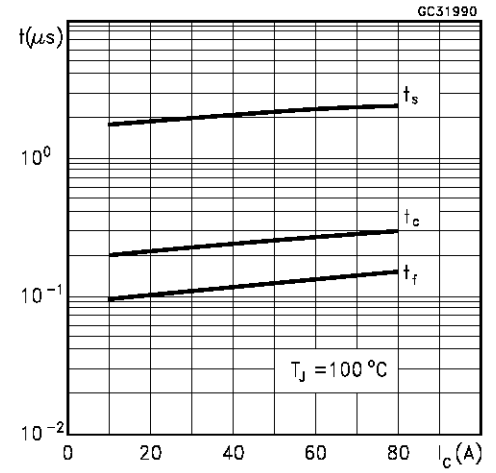


Switching Times Inductive Load Versus Temperature

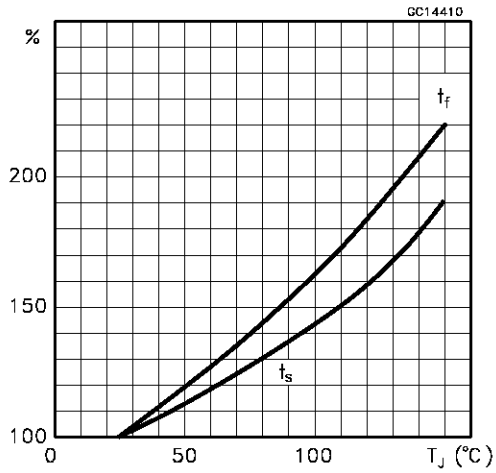

Dc Current Gain

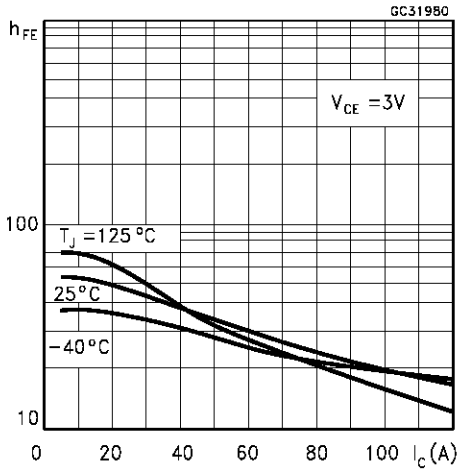


Turn-on Switching Test Circuit

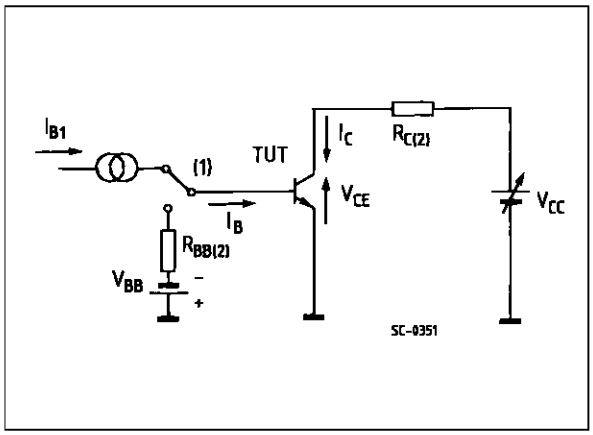


(1) Fast electronics switch (2) Non-inductive load

Turn-on Switching Waveforms

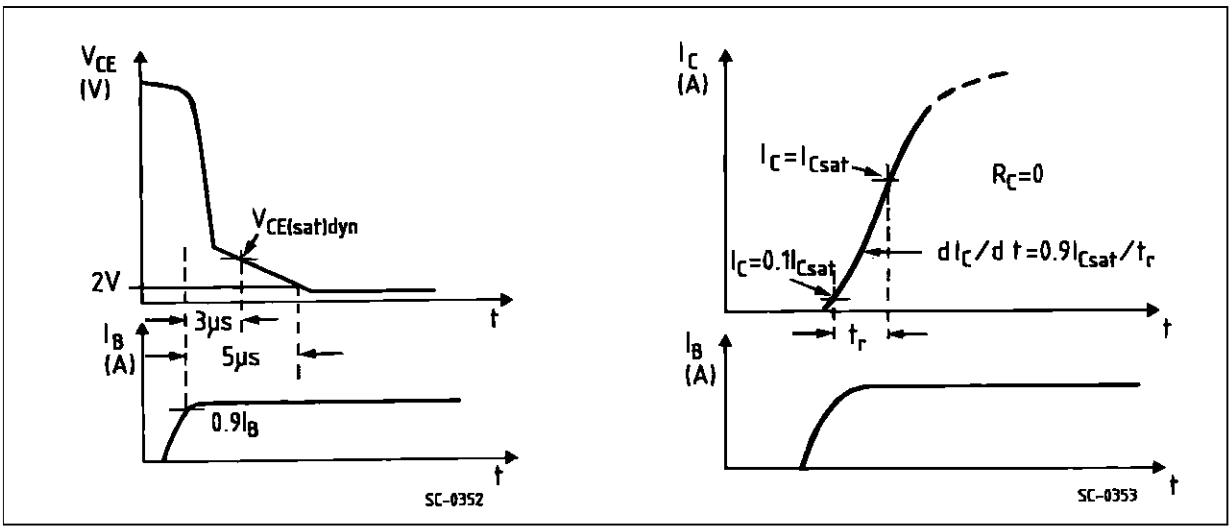


Turn-off Switching Test Circuit

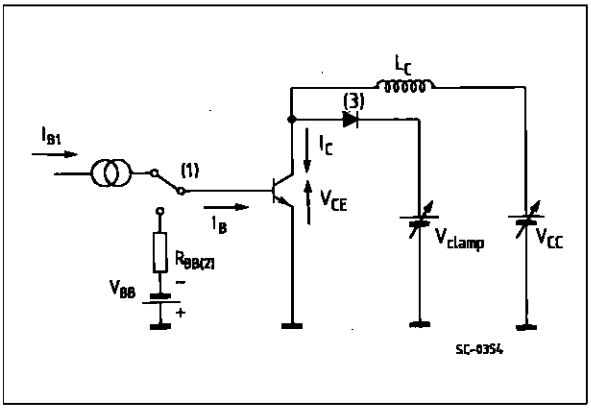


(1) Fast electronic switch (2) Non-inductive load
(3) Fast recovery rectifier

Turn-off Switching Waveforms

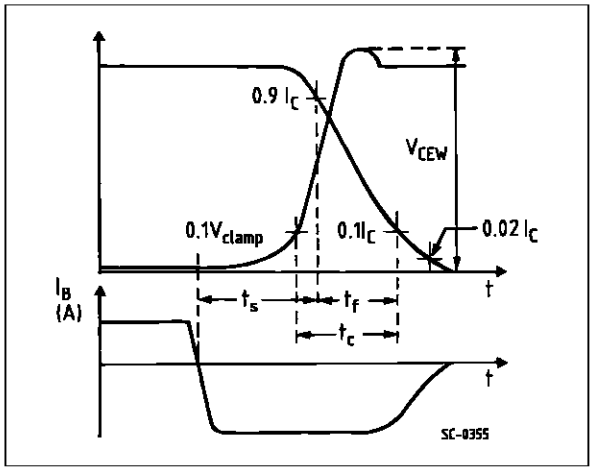

ISOTOP MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	11.8		12.2	0.466		0.480
B	8.9		9.1	0.350		0.358
C	1.95		2.05	0.076		0.080
D	0.75		0.85	0.029		0.033
E	12.6		12.8	0.496		0.503
F	25.15		25.5	0.990		1.003
G	31.5		31.7	1.240		1.248
H	4			0.157		
J	4.1		4.3	0.161		0.169
K	14.9		15.1	0.586		0.594
L	30.1		30.3	1.185		1.193
M	37.8		38.2	1.488		1.503
N	4			0.157		
O	7.8		8.2	0.307		0.322

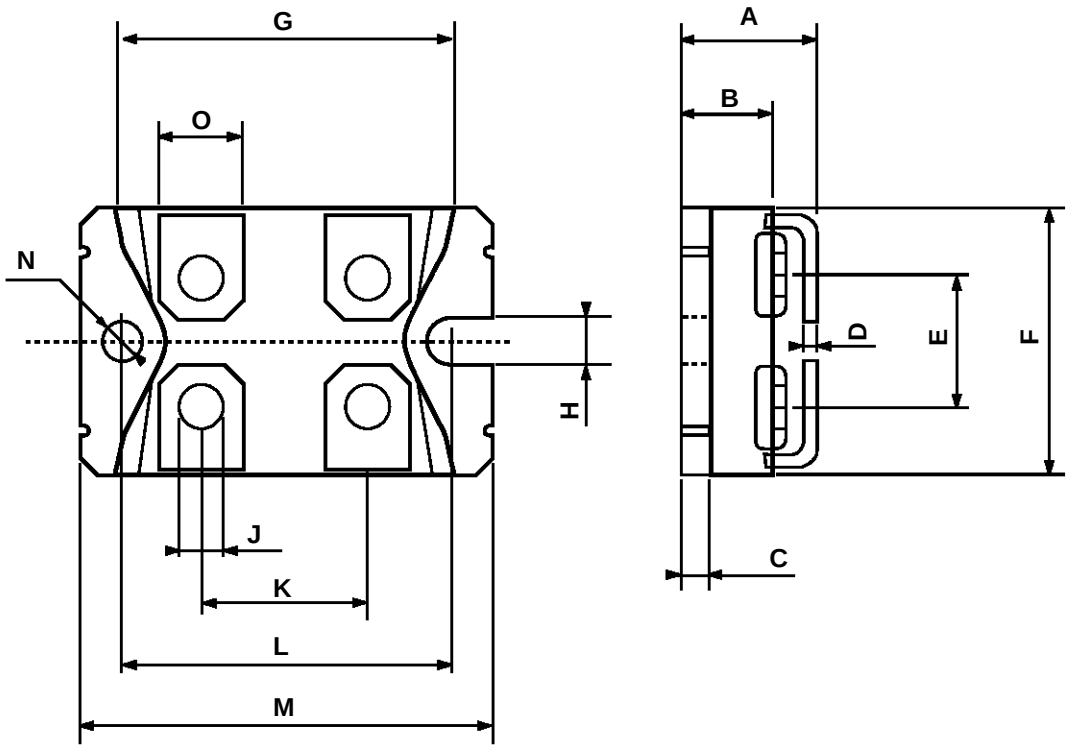

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsability for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectonics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A
. . .