


1. Dimensions:

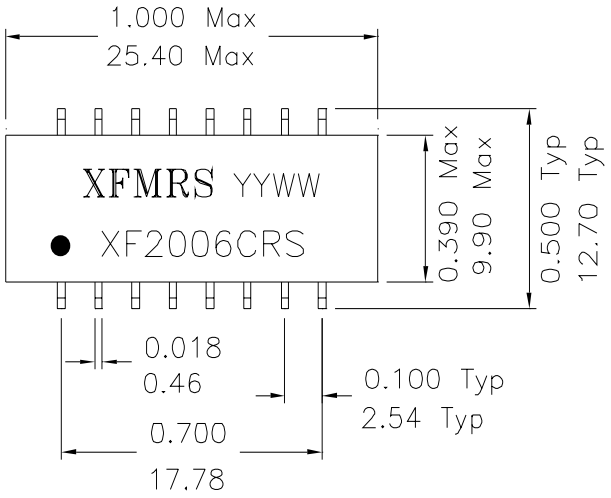


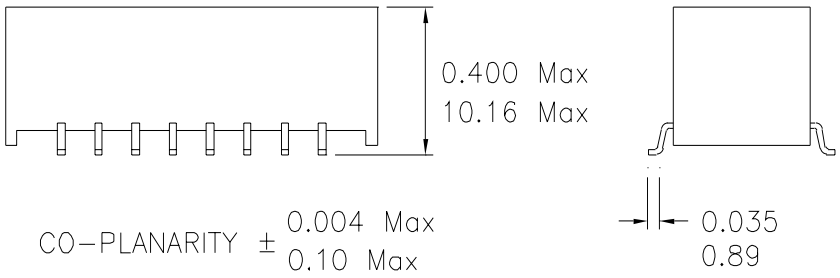

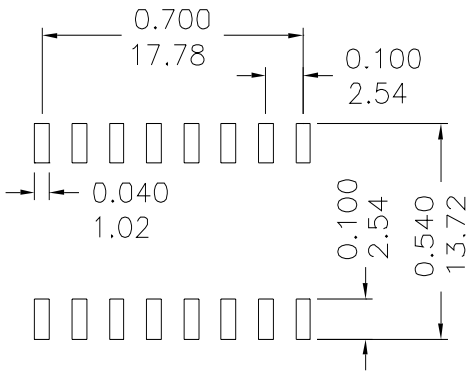

SUGGESTED FOOTPRINT

2. Schematic:

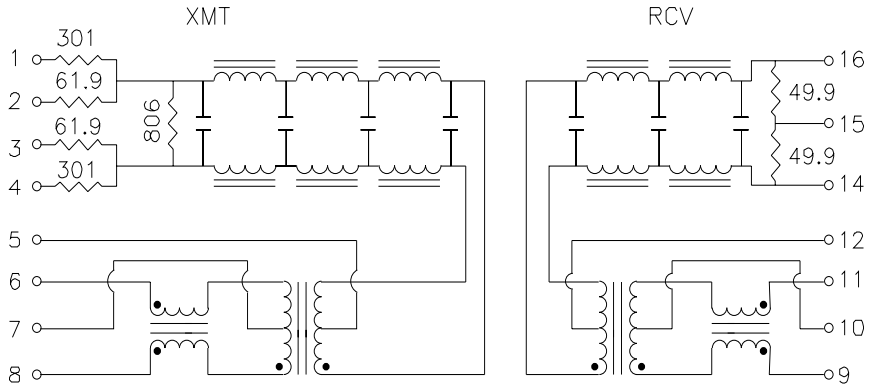

3. Electrical Specifications: @25°C

HIPOT: 1500VAC

Insertion Loss (1-10MHz): -1.0dB Maximum

INBAND VARIATION: 0.30dB Maximum

Return Loss (1-10MHz): -20dB Minimum

Cross Talk (1-10MHz): -30dB Minimum

*Attenuation @30MHz

Transmit	-27dB Minimum
Receive	-18dB Minimum

Cut off Frequency: 17MHz Typical

Turns Ratio: 1CT:1CT (XMT & RCV)

Nominal Input Impedance: 100 ohms (XMT)

Nominal Input Impedance: 100 ohms (RCV)

DOC. REV A/1

XFMRS Inc.	Title: 10 BASE - T FILTER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF2006CRS		REV. A
	DWN.	廣玉坤	Sep-23-99
	CHK.	李清化	Sep-23-99
SCALE 1.5:1 SHT 1 OF 1	APP.	Joe Huff	Sep-23-99

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION