




## Connectors System AC 164 Panel Mounting

### AC 164 EST/ 2 pastel blue Frame white

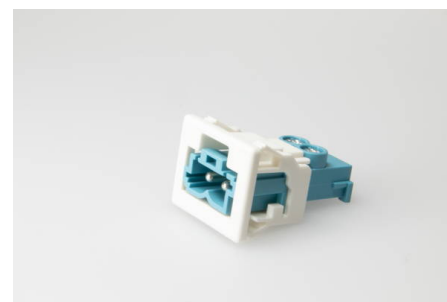

Plug, 2 pole, pastel blue white, Coding: 2 (DALI), Voltage Rating: 250 V, Current Rating: 16 A, Cross-Section: 1.5 mm<sup>2</sup>, Wall Thickness min.: 0.5 mm, Wall Thickness max.: 1.2 mm

#### Order Info

<b>Reference Number (ref. no.)</b>	1487P2
<b>Applications</b>	Lighting, Installation, Electrical Appliances
<b>PU</b>	100
<b>EAN</b>	4028012124022

#### Type

<b>Type</b>	Plug
<b>Number of poles</b>	2 pole
<b>Clamping Units per Pole</b>	1
<b>Colour</b>	pastel blue white
<b>Coding</b>	2 (DALI)
<b>Cross-Section</b>	1.5 mm <sup>2</sup>
<b>Connection Type</b>	Screw
<b>Protection Against Incorrect Plugging</b>	yes
<b>Latch</b>	yes

#### Technical Data

<b>Voltage Rating</b>	250 V
<b>Current Rating</b>	16 A
<b>Insulating Material</b>	PA 6.6
<b>Contact Material</b>	Brass
<b>Core Cross-Section min.</b>	0.5 mm <sup>2</sup>
<b>Core Cross-Section max.</b>	1.5 mm <sup>2</sup>
<b>Impulse Voltage Rating</b>	4.0 kV
<b>Flammability Rating</b>	V-2
<b>max. Ambient Temperature Operation</b>	70 °C
<b>IP Code</b>	IP20
<b>IP Code when Plugged</b>	IP40
<b>Type of Conductor Solid</b>	yes
<b>Type of Conductor Flexible</b>	yes
<b>Type of Conductor Stranded</b>	yes

<b>Stripping Length</b>	7.0 mm
<b>Assembly Contact Screw</b>	PZ 1 / $\cup$ 0.5 Nm
<b>Wall Thickness min.</b>	0.5 mm
<b>Wall Thickness max.</b>	1.2 mm
<b>Approbation EN61535</b>	AC 164_EN61535_20190125_DEKRA_ENEC_71-107174_web.pdf
<b>Approbation UL</b>	160_163_AC164_AC166_20011003_20170727_UL_E220480_Sec.1-6