

# U74LVC2G157


CMOS IC

## SINGLE 2-LINE TO 1-LINE DATA SELECTOR OR MULTIPLEXER

### ■ DESCRIPTION

The **U74LVC2G157** is a single 2-line to 1-line data selector or multiplexer which is featured a common strobe ( $\bar{G}$ ) input. When the strobe is high, the output Y is low and  $\bar{Y}$  is high regardless of the levels of other inputs. When the strobe is low, a single bit is selected from one of two sources and is transferred to the output with the true and complementary data.

This device has power-down protective circuit, preventing device destruction when it is powered down.



SOP-8

### ■ FEATURES


- \* Operate from 1.65V to 5.5V
- \* Inputs accept voltages to 5.5V
- \*  $I_{off}$  supports partial-power-down mode
- \* Low power dissipation:  $I_{CC}=10\mu A$ (Max.)
- \*  $\pm 24mA$  output drive( $V_{CC}=3.3V$ )
- \* Max tpd at 6ns of 3.3V

### ■ ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74LVC2G157L-S08-T	U74LVC2G157G-S08-T	SOP-8	Tube
U74LVC2G157L-S08-R	U74LVC2G157G-S08-R	SOP-8	Tape Reel

U74LVC2G157L-S08-R <li>(1) Packing Type</li> <li>(2) Package Type</li> <li>(3) Lead Plating</li>	<ul style="list-style-type: none"> <li>(1) T: Tube, R: Tape Reel</li> <li>(2) S08: SOP-8</li> <li>(3) L: Lead Free, G: Halogen Free</li> </ul>
---	--

■ PIN CONFIGURATION

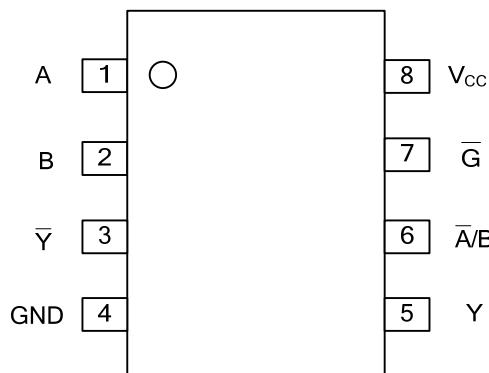


■ FUNCTION TABLE (EACH GATE)

INPUTS				OUTPUT	
$\bar{G}$	$\bar{A}/B$	A	B	Y	$\bar{Y}$
H	X	X	X	L	H
L	L	L	X	L	H
L	L	H	X	H	L
L	H	X	L	L	H
L	H	X	H	H	L

Note: H: HIGH voltage level; L: LOW voltage level; X: Don't care

■ LOGIC DIAGRAM (positive logic)

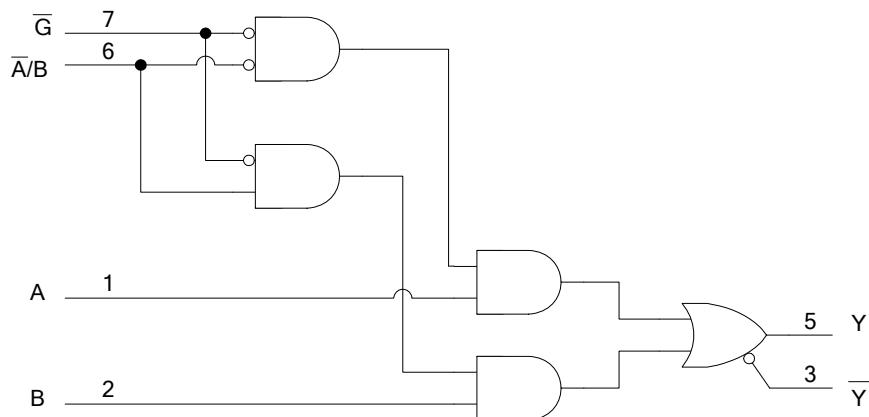

### ■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V <sub>CC</sub>	-0.5 ~ +6.5	V
Input Voltage		V <sub>IN</sub>	-0.5 ~ +6.5	V
Output Voltage	Output in the high or low state	V <sub>OUT</sub>	-0.5 ~ V <sub>CC</sub> +0.5	V
	Output in the high-impedance or power-off state		-0.5 ~ +6.5	V
V <sub>CC</sub> or GND Current		I <sub>CC</sub>	±100	mA
Continuous Output Current (V <sub>OUT</sub> =0 to V <sub>CC</sub> )		I <sub>OUT</sub>	±50	mA
Input Clamp Current (V <sub>IN</sub> <0)		I <sub>IK</sub>	-50	mA
Output Clamp Current (V <sub>OUT</sub> <0)		I <sub>OK</sub>	-50	mA
Storage Temperature Range		T <sub>STG</sub>	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V <sub>CC</sub>	Operating	1.65		5.5	V
		Data retention only	1.5			V
Input Voltage	V <sub>IN</sub>		0		5.5	V
Output Voltage	V <sub>OUT</sub>		0		V <sub>CC</sub>	V
High-Level Input Voltage	V <sub>IH</sub>	V <sub>CC</sub> =1.65V~1.95V	0.65*V <sub>CC</sub>			V
		V <sub>CC</sub> =2.3V~2.7V	1.7			
		V <sub>CC</sub> =3.0V~3.6V	2			
		V <sub>CC</sub> =4.5V~5.5V	0.7*V <sub>CC</sub>			
Low-Level Input Voltage	V <sub>IL</sub>	V <sub>CC</sub> =1.65V~1.95V			0.35*V <sub>CC</sub>	V
		V <sub>CC</sub> =2.3V~2.7V			0.7	
		V <sub>CC</sub> =3.0V~3.6V			0.8	
		V <sub>CC</sub> =4.5V~5.5V			0.3*V <sub>CC</sub>	
High-level Output Current	I <sub>OH</sub>	V <sub>CC</sub> =1.65V			-4	mA
		V <sub>CC</sub> =2.3V			-8	mA
		V <sub>CC</sub> =3.0V			-16	mA
		V <sub>CC</sub> =3.0V			-24	mA
		V <sub>CC</sub> =4.5V			-32	mA
Low-level Output Current	I <sub>OL</sub>	V <sub>CC</sub> =1.65V			4	mA
		V <sub>CC</sub> =2.3V			8	mA
		V <sub>CC</sub> =3.0V			16	mA
		V <sub>CC</sub> =3.0V			24	mA
		V <sub>CC</sub> =4.5V			32	mA
Input Transition Rise or Fall Rate	Δt/Δv	V <sub>CC</sub> =1.65V~1.95V, 2.3V~2.7V			20	ns/V
		V <sub>CC</sub> =3.0V~3.6V			10	ns/V
		V <sub>CC</sub> =4.5V~5.5V			5	ns/V
Operating Temperature	T <sub>A</sub>		-40		85	°C

■ ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ C$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Output Voltage	$V_{OH}$	$V_{CC} = 1.65V \sim 5.5V, I_{OH} = -100\mu A$	$V_{CC} - 0.1$			V
		$V_{CC} = 1.65V, I_{OH} = -4mA$	1.2			
		$V_{CC} = 2.3V, I_{OH} = -8mA$	1.9			
		$V_{CC} = 3.0V, I_{OH} = -16mA$	2.2			
		$V_{CC} = 3.0V, I_{OH} = -24mA$	2.3			
		$V_{CC} = 4.5V, I_{OH} = -32mA$	3.8			
Low-Level Output Voltage	$V_{OL}$	$V_{CC} = 1.65V \sim 5.5V, I_{OH} = -100\mu A$			0.1	V
		$V_{CC} = 1.65V, I_{OH} = 4mA$			0.45	
		$V_{CC} = 2.3V, I_{OH} = 8mA$			0.3	
		$V_{CC} = 3.0V, I_{OH} = 16mA$			0.4	
		$V_{CC} = 3.0V, I_{OH} = 24mA$			0.55	
		$V_{CC} = 4.5V, I_{OH} = 32mA$			0.55	
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC} = 0V \sim 5.5V, V_{IN} = 5.5V$ or GND			$\pm 5$	$\mu A$
Power OFF Leakage Current	$I_{OFF}$	$V_{CC} = 0V, V_{IN}$ or $V_{OUT} = 5.5V$			$\pm 10$	$\mu A$
Quiescent Supply Current	$I_Q$	$V_{CC} = 1.65V \sim 5.5V$ , $V_{IN} = 5.5V$ or GND, $I_{OUT} = 0$			10	$\mu A$
Additional Quiescent Supply Current	$\Delta I_Q$	$V_{CC} = 3V \sim 5.5V$ , One input at $V_{CC} - 0.6V$ , other inputs at $V_{CC}$ or GND			500	$\mu A$
Input Capacitance	$C_{IN}$	$V_{CC} = 3.3V, V_{IN} = V_{CC}$ or GND		5		pF


■ SWITCHING CHARACTERISTICS ( $T_A = 25^\circ C$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A or B) to output(Y or $\bar{Y}$ )	$t_{PLH}/t_{PHL}$	$V_{CC} = 1.65V \sim 1.95V$	4.4		14	ns
		$V_{CC} = 2.3V \sim 2.7V$	2.1		8	
		$V_{CC} = 3.0V \sim 3.6V$	2		6	
		$V_{CC} = 4.5V \sim 5.5V$	1.4		4	
Propagation delay from input ( $\bar{A}/B$ ) to output(Y or $\bar{Y}$ )	$t_{PLH}/t_{PHL}$	$V_{CC} = 1.65V \sim 1.95V$	4.9		16	ns
		$V_{CC} = 2.3V \sim 2.7V$	2.5		9	
		$V_{CC} = 3.0V \sim 3.6V$	2.1		6	
		$V_{CC} = 4.5V \sim 5.5V$	1.6		4	
Propagation delay from input ( $\bar{G}$ ) to output(Y or $\bar{Y}$ )	$t_{PLH}/t_{PHL}$	$V_{CC} = 1.65V \sim 1.95V$	4.2		14	ns
		$V_{CC} = 2.3V \sim 2.7V$	2		8	
		$V_{CC} = 3.0V \sim 3.6V$	1.6		6	
		$V_{CC} = 4.5V \sim 5.5V$	1.3		4	

■ OPERATING CHARACTERISTICS ( $T_A = 25^\circ C$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	$C_{pd}$	$V_{CC} = 1.8V, f = 10MHz$		35		pF
		$V_{CC} = 2.5V, f = 10MHz$		35		pF
		$V_{CC} = 3.3V, f = 10MHz$		37		pF
		$V_{CC} = 5V, f = 10MHz$		40		pF

■ TEST CIRCUIT AND WAVEFORMS

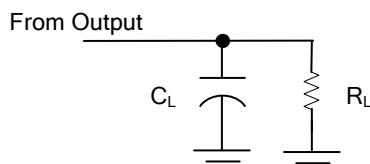

TEST CIRCUIT

$V_{CC}$	Inputs		$V_M$	$C_L$	$R_L$
	$V_{IN}$	$t_R, t_F$			
$V_{CC}=1.65V\sim1.95V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	30pF	1KΩ
$V_{CC}=2.3V\sim2.7V$	$V_{CC}$	$\leq 2ns$	$V_{CC}/2$	30pF	500Ω
$V_{CC}=3.0V\sim3.6V$	3.0V	$\leq 2.5ns$	1.5V	50pF	500Ω
$V_{CC}=4.5V\sim5.5V$	$V_{CC}$	$\leq 2.5ns$	$V_{CC}/2$	50pF	500Ω

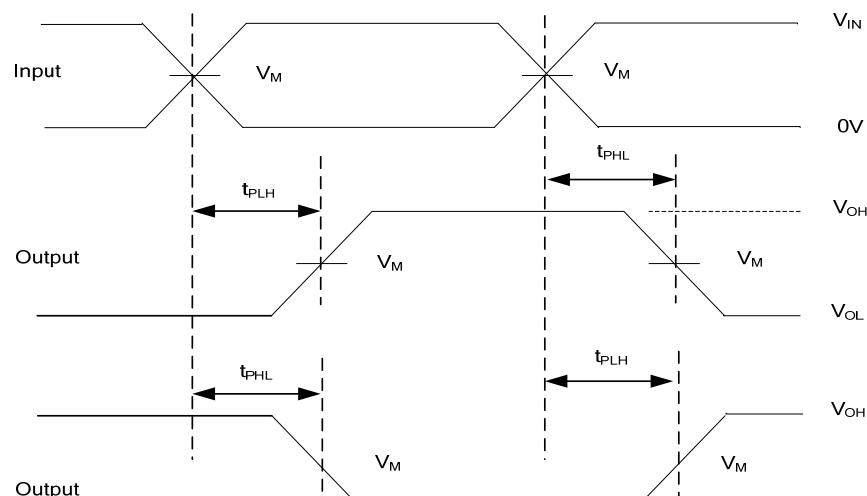

PROPAGATION DELAY TIMES

Note: 1.  $C_L$  includes probe and jig capacitance.  
2. All input pulses are supplied by generators having the following characteristics: PRR  $\leq 10MHz$ ,  $Z_0 = 50\Omega$ .

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.