

DRS1A thru DRS1M

1.FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * High temperature metallurgically bonded construction
- * Capable of meeting environmental standards of MIL-S-19500
- * Fast switching for high efficiency
- * Diffused junction
- * 1.0 A operation at $T_A=75^{\circ}\text{C}$ with no thermal runaway
- * Typical IR less than $1.0\mu\text{A}$
- * High temperature soldering guaranteed: $260^{\circ}\text{C}/10$ seconds
- * We declare that the material of product compliance with RoHS requirements.

2.Mechanical Data

Case: JEDEC DO-214AC, molded plastic body

Terminals: Solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.003 oz., 0.085 g

Handling precaution: None

3.Electrical Characteristic

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	DRS1A	DRS1B	DRS1D	DRS1G	DRS1J	DRS1K	DRS1M	Unit
Marking		S1A	S1B	S1D	S1G	S1J	S1K	S1M	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 75^{\circ}\text{C}$	$I_F(AV)$	1.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	25							A
Maximum thermal resistance	$R_{\theta JA}$	65							$^{\circ}\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-50 to $+150$							$^{\circ}\text{C}$


Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	DRS1A	DRS1B	DRS1D	DRS1G	DRS1J	DRS1K	DRS1M	Unit
Maximum instantaneous forward voltage at 1.0A	V_F	1.3							V
Maximum DC reverse current $T_A = 25^{\circ}\text{C}$ at rated DC blocking voltage $T_A = 100^{\circ}\text{C}$	IR	5.0 200							μA
Typical reverse recovery time (Note 1)	t_{rr}	150				250	500		ns
Typical junction capacitance at 4.0V, 1MHz	CJ	15.0							PF

NOTES:

1. $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$

Surface Mount
Fast Recovery Rectifiers
Reverse Voltage 50 to 1000V
Forward Current 1.0A

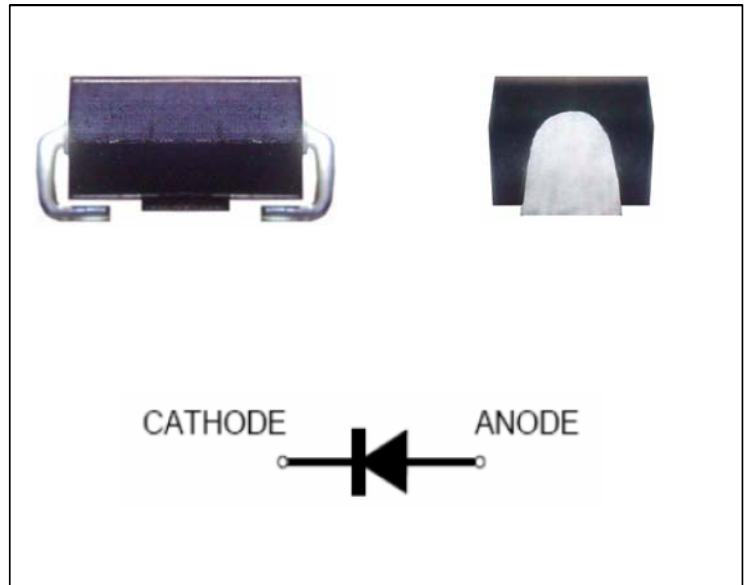

DRS1A thru DRS1M

4. Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

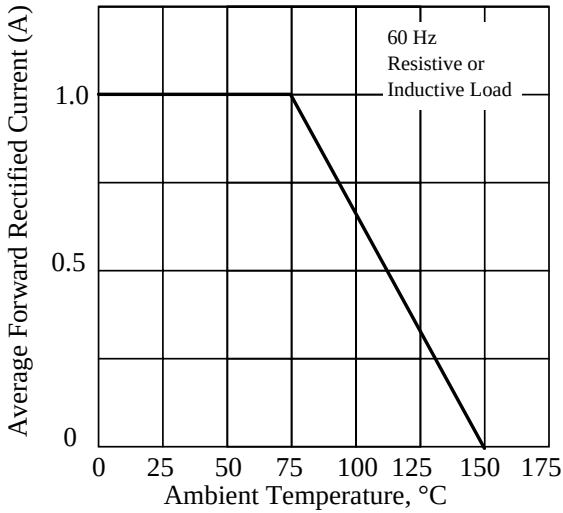


Fig. 2 – Maximum Non-repetitive Peak Forward Surge Current

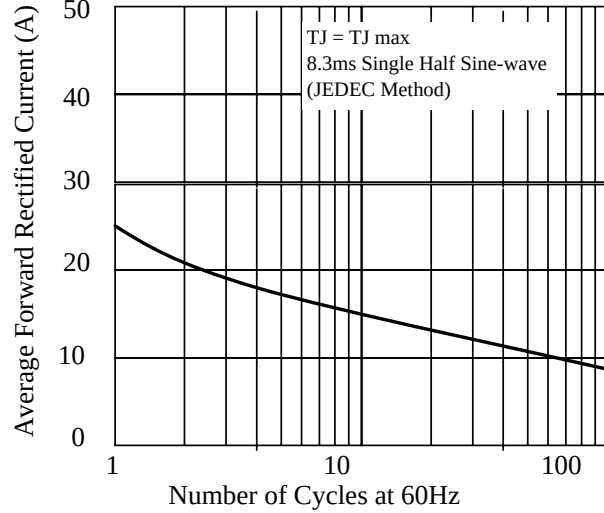


Fig 3. – Typical Instantaneous Forward Characteristics

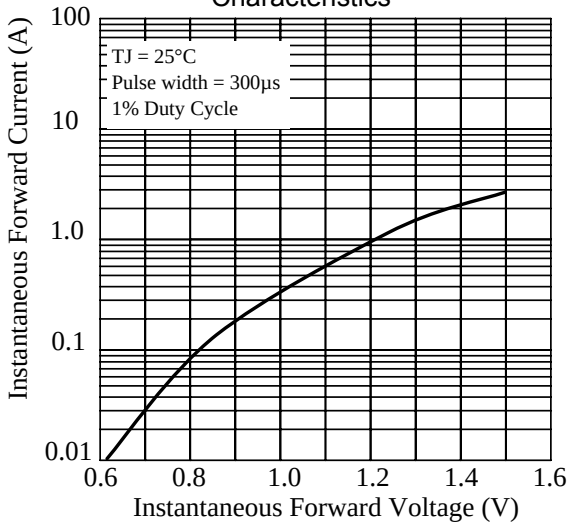


Fig 4. – Typical Reverse Characteristics

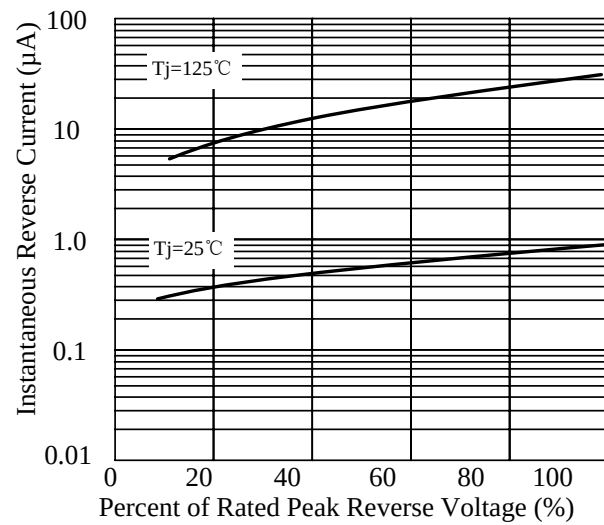


Fig 5. – Typical Junction Capacitance



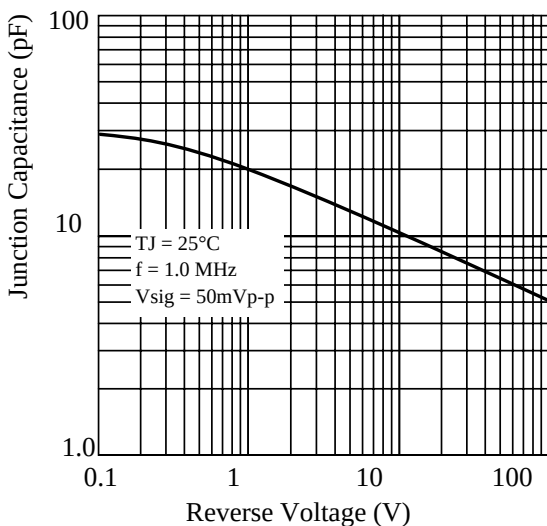


Fig 6. – Transient Thermal Impedance

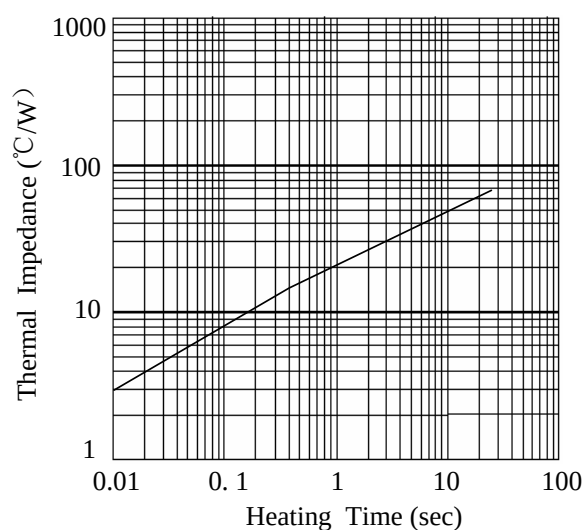


5.Package Dimensions in inches and (millimeters)

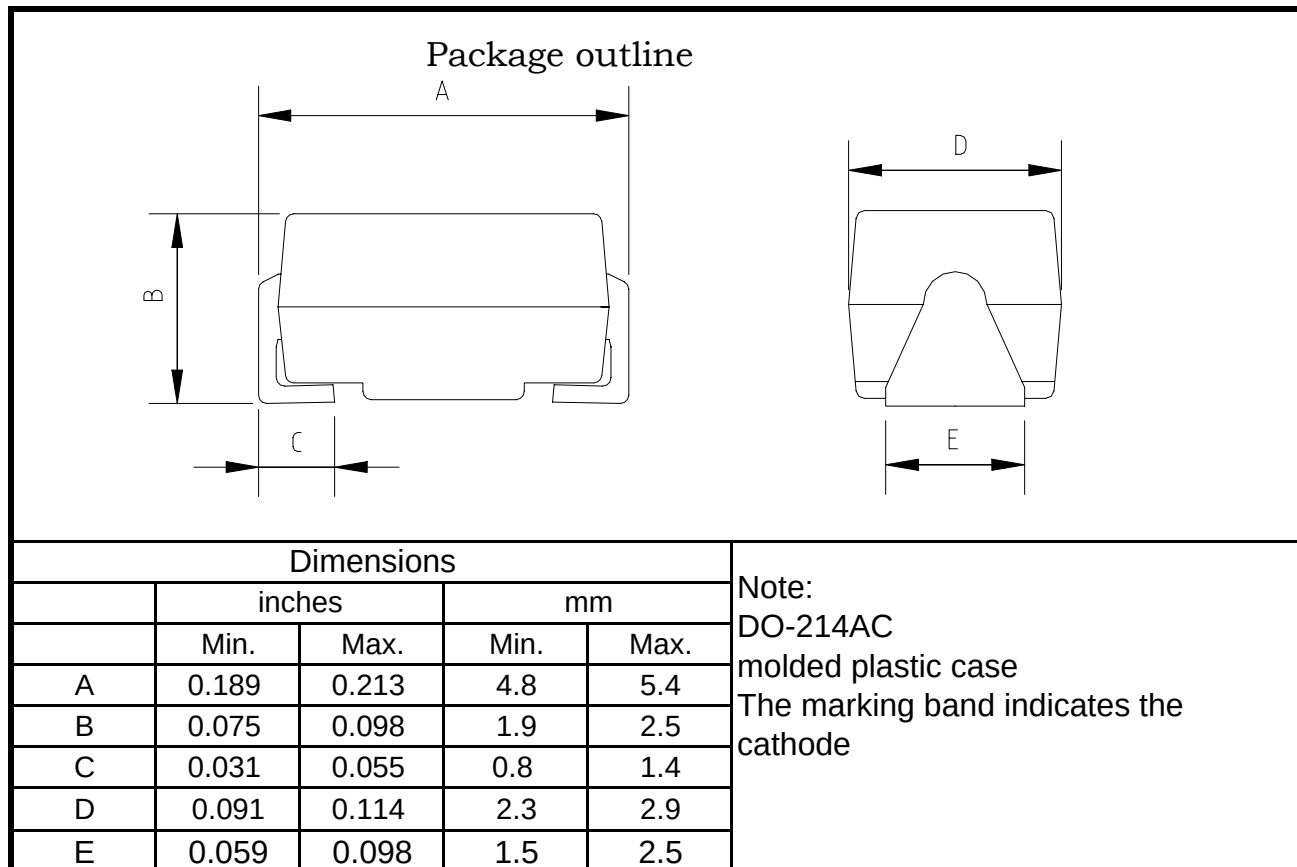

SMA Packing Specification


1. 卷盘规格/Reel Packing

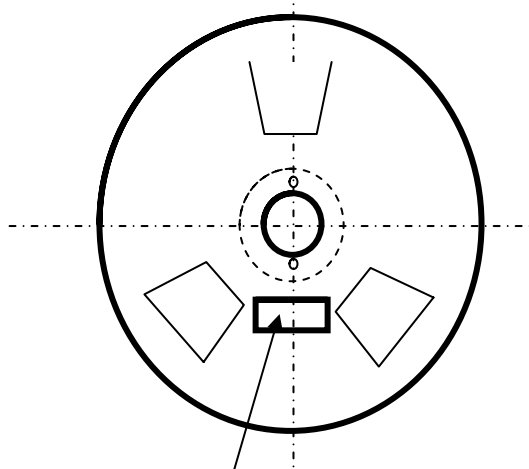

Label stike this position


Item	Q'ty/Taping
7"	2K
13"	5K

Unit:mm

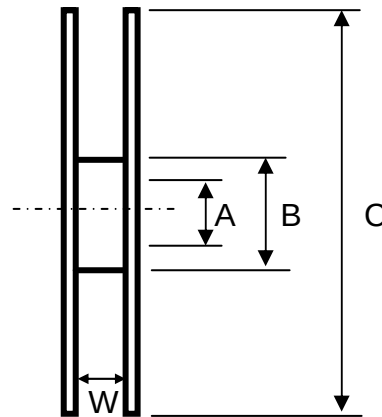


Item	Symbol	Dimension
13" Size	A	13.0±0.2
	B	75.0±0.5
	C	330±1.0
	W	13.2±1.0
7" Size	A	13.0±0.2
	B	54±0.5
	C	177±1.0
	W	13.2±1.0

2. 内箱规格/ Inside Box Specification

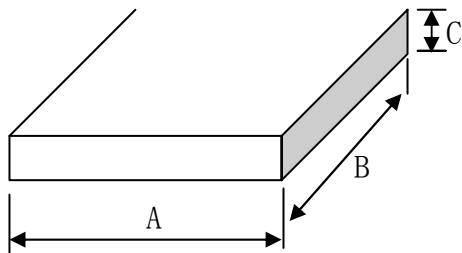

Item	Symbol	Dimension
Size	A	335±2
	B	335±2
	C	40±1

3. 外箱规格/Outer Box Specification

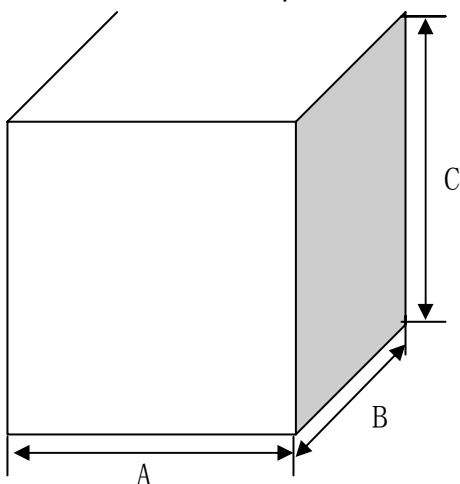

Item	Symbol	Dimension
Size	A	350±2
	B	350±2
	C	345±2