CONNOR–WINFIELD CORPORATION

AURORA, IL. 60505

PHONE (630) 851–4722

FAX (630) 851–5040

OSCILLATORS

14 PIN DIP
HIGH SPEED SINEWAVE

SPECIFICATIONS		SW73*
Frequency Range		1MHz to 70MHz
Frequency Tolerance		±.01%
Temperature Range		–55°C to +125°C
Output * – (add suffix to model number)		Sinewave, AC Coupled T.H.D. <5%, 2% Typ
	5	10dBm ±3dBm into a 50 ohms load
	10	3Vrms ±1Vrms into a 10K ohms load
Supply Voltage		+5Vdc ±10%
Supply Current		100mA Maximum
Package		All metal, hermetically sealed, welded package

EXAMPLE MODEL NUMBER:

S W 7 3 1 0

Sinewave Series — ±.01% — –55°C to +125°C — 3Vrms ±1Vrms 10K Ohm Load

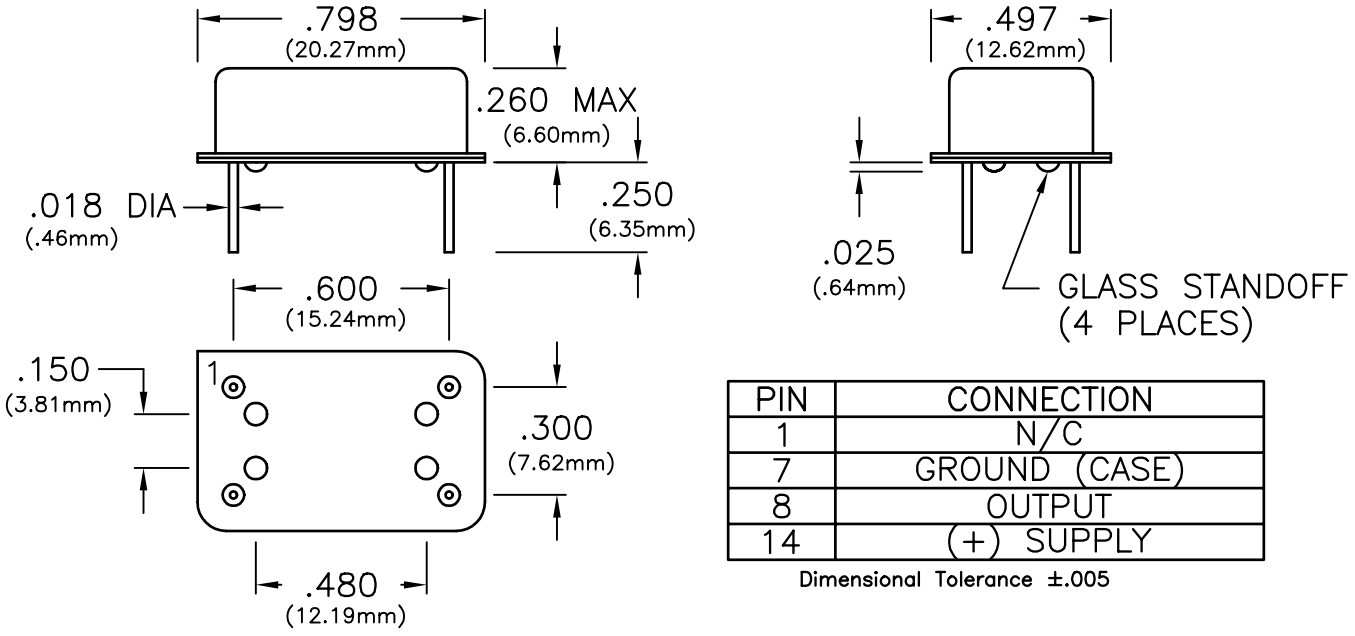

PIN	CONNECTION
1	N/C
7	GROUND (CASE)
8	OUTPUT
14	(+) SUPPLY

Dimensional Tolerance ±.005

Specifications subject to change without notice