

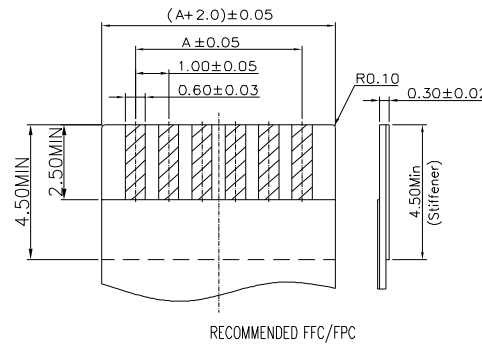
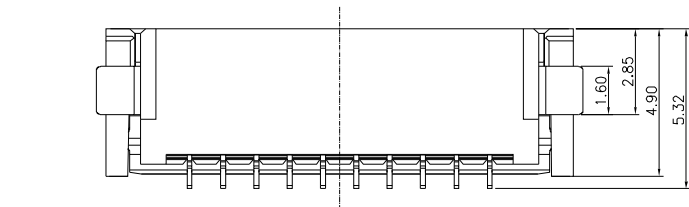
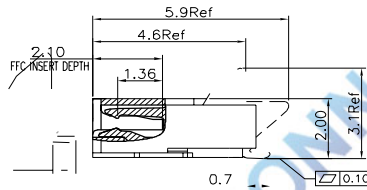


NOTES:

1. MATERIAL:
 - 1.1 CARRY TAPE:HIPS,T=0.30±0.05mm,CLEAR
 - 1.2 REEL:HIPS,
 - 1.3 SHIM:PE,CLEAR.
2. PRIMARY PACKING:1500PCS/REEL.
3. SECONDARY PACKING:SEE PACKING LIST
4. PEELING RESISTANCE: 0.2~1.2N(20~120gf); PEELING ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

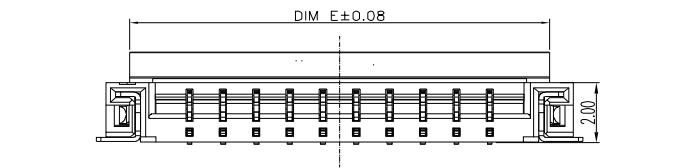

| Pin No. | DIM A | DIM B | DIM C | DIM D | DIM E | DIM F | DIM G |
|---------|-------|-------|-------|-------|-------|-------|-------|
| 4 | 3.00 | 5.05 | 8.00 | 8.60 | 6.60 | 6.40 | 9.60 |
| 5 | 4.00 | 6.05 | 9.00 | 9.60 | 7.60 | 7.40 | 10.60 |
| 6 | 5.00 | 7.05 | 10.00 | 10.60 | 8.60 | 8.40 | 11.60 |
| 7 | 6.00 | 8.05 | 11.00 | 11.60 | 9.60 | 9.40 | 12.60 |
| 8 | 7.00 | 9.05 | 12.00 | 12.60 | 10.60 | 10.40 | 13.60 |
| 9 | 8.00 | 10.05 | 13.00 | 13.60 | 11.60 | 11.40 | 14.60 |
| 10 | 9.00 | 11.05 | 14.00 | 14.60 | 12.60 | 12.40 | 15.60 |
| 11 | 10.00 | 12.05 | 15.00 | 15.60 | 13.60 | 13.40 | 16.60 |
| 12 | 11.00 | 13.05 | 16.00 | 16.60 | 14.60 | 14.40 | 17.60 |
| 13 | 12.00 | 14.05 | 17.00 | 17.60 | 15.60 | 15.40 | 18.60 |
| 14 | 13.00 | 15.05 | 18.00 | 18.60 | 16.60 | 16.40 | 19.60 |
| 15 | 14.00 | 16.05 | 19.00 | 19.60 | 17.60 | 17.40 | 20.60 |
| 16 | 15.00 | 17.05 | 20.00 | 20.60 | 18.60 | 18.40 | 21.60 |
| 17 | 16.00 | 18.05 | 21.00 | 21.60 | 19.60 | 19.40 | 22.60 |
| 18 | 17.00 | 19.05 | 22.00 | 22.60 | 20.60 | 20.40 | 23.60 |
| 19 | 18.00 | 20.05 | 23.00 | 23.60 | 21.60 | 21.40 | 24.60 |
| 20 | 19.00 | 21.05 | 24.00 | 24.60 | 22.60 | 22.40 | 25.60 |
| 21 | 20.00 | 22.05 | 25.00 | 25.60 | 23.60 | 23.40 | 26.60 |
| 22 | 21.00 | 23.05 | 26.00 | 26.60 | 24.60 | 24.40 | 27.60 |
| 23 | 22.00 | 24.05 | 27.00 | 27.60 | 25.60 | 25.40 | 28.60 |
| 24 | 23.00 | 25.05 | 28.00 | 28.60 | 26.60 | 26.40 | 29.60 |
| 25 | 24.00 | 26.05 | 29.00 | 29.60 | 27.60 | 27.40 | 30.60 |
| 26 | 25.00 | 27.05 | 30.00 | 30.60 | 28.60 | 28.40 | 31.60 |
| 27 | 26.00 | 28.05 | 31.00 | 31.60 | 29.60 | 29.40 | 32.60 |
| 28 | 27.00 | 29.05 | 32.00 | 32.60 | 30.60 | 30.40 | 33.60 |
| 29 | 28.00 | 30.05 | 33.00 | 33.60 | 31.60 | 31.40 | 34.60 |
| 30 | 29.00 | 31.05 | 34.00 | 34.60 | 32.60 | 32.40 | 35.60 |
| 36 | 35.00 | 37.05 | 40.00 | 40.60 | 38.60 | 38.40 | 41.60 |
| 40 | 39.00 | 41.05 | 44.00 | 44.60 | 42.60 | 42.40 | 45.60 |

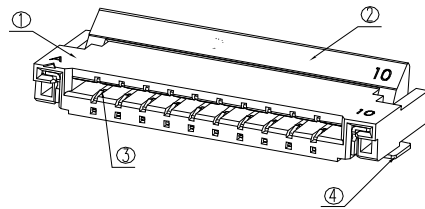

F1004-H-xx-20T-R
 R=卷装 无=管装
 T=镀锡 G=镀金
 Pin位数
 H=上下接

| NO. | COMPONENTS | MATERIALS | FINISH/COLOR | SPECIFICATION | QUANTITY |
|-----|------------|-----------------------|--------------|---------------|-----------|
| 4 | STATOR | BRASS | | | 2 |
| 3 | TERMINAL | PHOSPHOR BRONZE | | | POSITIONS |
| 2 | COVER | THERMOPLASTIC UL94V-0 | BLACK | | 1 |
| 1 | HOUSING | THERMOPLASTIC UL94V-0 | NATURAL | | 1 |

| | | | | TOLERANCE UNLESS OTHERWISE | | DRAWN | CK | tan | | XFCN兴飞连接器有限公司 | | SHEET | 1/1 | |
|-----|--------------|------|------|----------------------------|-------|-------|-------|------|--|--------------------------------------|-----------------------|---------|-------------|-----|
| | | | | X. | ±0.30 | X° | ±5° | CHKD | | CONNECTORS XFCN CONNECTORS CO., LTD. | | DATE | 2010. 4. 12 | |
| | | | | .X | ±0.20 | .X° | ±2° | APPD | | PRODUCT NAME | FPC 1.00mm Connectors | | UNITS | mm |
| | | | | .XX | ±0.08 | .XX° | ±1° | VIEW | | PART. NO. | F1004-H-xx-20G-R | | SCALE | 1:1 |
| | | | | .XXX | ±0.03 | .XXX° | ±0.5° | | | | | DWG NO. | 009 | |
| AO | MODIFICATION | DRAW | DATE | | | | | | | | | | | |
| VER | | | | | | | | | | | | | | |