Download from alldatasheet.com

New Jersey Semi-Conductor Products, Inc.


20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Silicon NPN Power Transistor — 2SC2260

DESCRIPTION

- High Power Dissipation-
  : P_C= 80W(Max.)@T_C=25℃
- Collector-Emitter Breakdown Voltage-
  : $V_{(BR)CEO}$= 100V(Min.)
- Complement to Type 2SA980

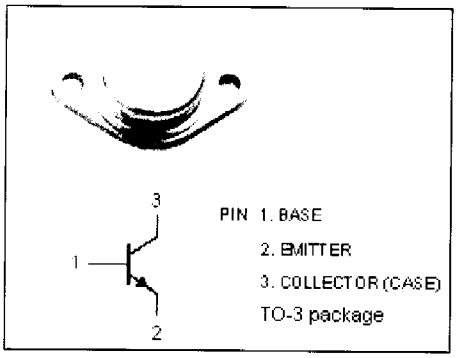


APPLICATIONS

- Designed for general purpose applications.

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	160	V
V_{CEO}	Collector-Emitter Voltage	100	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	8	A
I_B	Base Current-Continuous	3	A
P_C	Collector Power Dissipation @T_C=25℃	80	W
T_j	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-65~150	℃

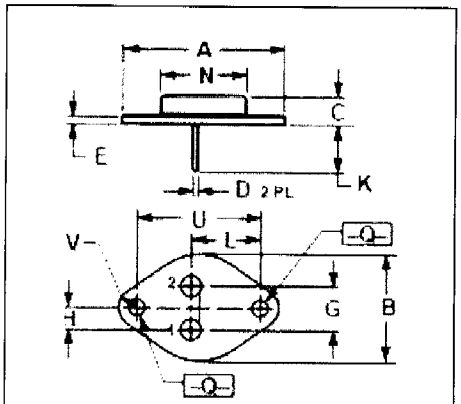

DIM	mm MIN	MAX
A	39.00	
B	25.30	26.67
C	7.80	8.50
D	0.90	1.10
E	1.40	1.60
G	10.92	
H	5.46	
K	11.30	13.50
L	16.75	17.05
N	19.40	19.62
Q	4.00	4.20
U	30.00	30.20
V	4.30	4.50

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Download from alldatasheet.com

ELECTRICAL CHARACTERISTICS

Tj=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	I_C= 50mA; I_B= 0	100			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= 3A; I_B= 0.3A			1.5	V
I_{CBO}	Collector Cutoff Current	V_{CB}= 160V; I_E= 0			1.0	mA
I_{EBO}	Emitter Cutoff Current	V_{EB}= 6V; I_C= 0			1.0	mA
h_{FE}	DC Current Gain	I_C= 3A; V_{CE}= 4V	30			
f_T	Current-Gain—Bandwidth Product	I_E= -0.5A; V_{CE}= 12V		15		MHz