





Surface Mount Self-Leaded Inductor 150 kHz

Electrical Specifications at 25°C. Operating Temp. Range: -30°C to +130°C

| Part Number | L ⁽¹⁾ with DC (μ H) | I _{DC} ⁽¹⁾ (Amps) | E-T ⁽¹⁾ Product (V- μ s) | DCR Nom. (Ω) |
|-------------|---|--|---|-----------------------------|
| L-15373 | 53 | 3.0 | 42.9 | 0.08 |

- 1) Typical values for a 55°C Temperature rise at 150 kHz and E-T value above, the core loss is 10 % of copper loss.

Schematic Diagram

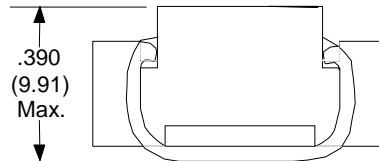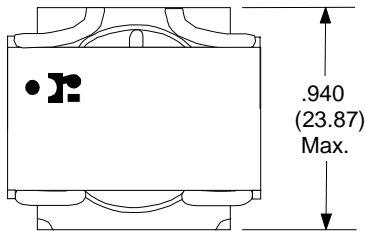

RHOMBUS P/N: L-15373

CUST P/N:

NAME:

DATE: 5/30/00

SHEET: 1 OF 1